




Specifications	
Precision grade	KHK R 001 grade 5
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	15°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 95HRB)



* SW Saw Blade Finished **R1**


Catalog No.	Module	Effective no. of teeth	Direction of helix	Shape	Total length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	B				Bending strength	Surface durability	Bending strength	Surface durability
SRH2-100R SRH2-100L	m2	12	R L	RR RL	95	25	25	23	4710	1570	481	160	
SRH2-500R SRH2-500L		R L	R1										
SRH2-1000R SRH2-1000L		R L	R1										
SRH3-100R SRH3-100L	m3	7	R L	RR RL	95	35	35	32	9910	3520	1010	359	
SRH3-500R SRH3-500L		R L	R1										
SRH3-1000R SRH3-1000L		R L	R1										

Catalog No.	Module	No. of teeth	Direction of helix	Shape	Total length		Face width	Height	Height to pitch line	Allowable force (N)	
					A	A'				Bending strength	Surface durability
SRHF2-1000R SRHF2-1000L	m2	153	R L	RFR RFL	995.24	1001.94	25	25	23	4710	1570
SRHF3-1000R SRHF3-1000L	m3	102	R L	RFR RFL	995.24	1004.62	35	35	32	9910	3520

Catalog No.	Module	No. of teeth	Direction of helix	Shape	Total length		Face width	Height	Height to pitch line	Mounting hole dimensions			No. of mounting holes	Mounting screw size
					A	A'				B	C	D		
SRHFD2-1000R SRHFD2-1000L	m2	153	R L	RDR RDL	995.24	1001.94	25	25	23	10	47.62	180	6	M6
SRHFD3-1000R SRHFD3-1000L	m3	102	R L	RDR RDL	995.24	1004.62	35	35	32	14	47.62	180	6	M10


- [Caution on Product Characteristics]
- The allowable forces shown in the table are the calculated values according to the assumed usage conditions. Please see Page 189 for more details.
 - The backlash of racks differ depending on the size of the mating pinion. Please calculate the backlash from the backlash value of the mating pinion. Also, please refer to the data in the section called 'Backlash of Rack Tooth (Amount of Tooth Thinning)' on Page 191.
 - Please use SH Helical Gears as the mating pinion.
 - These racks produce axial thrust forces. See page 167 for more details.
 - After attaching the racks to the base, please fasten with dowel pins. Clamping only with mounting screws could possibly cause the screws to be broken, due to a heavy load.

* For products not categorized in our KHK Stock Gear series, custom gear production services with **short lead times** is available. For details see Page 8.

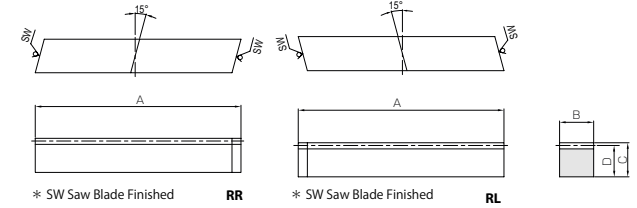

* SW Saw Blade Finished **RR** * SW Saw Blade Finished **RL**

Weight (kg)	Catalog No.
0.43	SRH2-100R SRH2-100L
2.28	SRH2-500R SRH2-500L
4.56	SRH2-1000R SRH2-1000L
0.84	SRH3-100R SRH3-100L
4.44	SRH3-500R SRH3-500L
8.88	SRH3-1000R SRH3-1000L

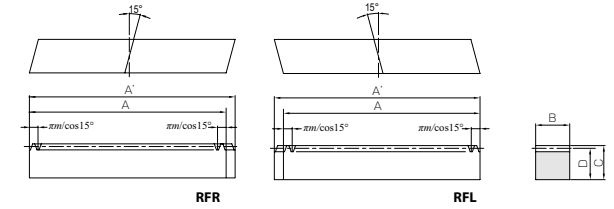


RFR **RFL**

Allowable force (kgf)		Weight (kg)	Catalog No.
Bending strength	Surface durability		
481	160	4.49	SRHF2-1000R SRHF2-1000L
1010	359	8.75	SRHF3-1000R SRHF3-1000L

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Weight (kg)	Catalog No.
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability		
7	11	7	4710	1570	481	160	4.43	SRHFD2-1000R SRHFD2-1000L
10.8	17.5	11	9910	3520	1010	359	8.52	SRHFD3-1000R SRHFD3-1000L

- [Caution on Secondary Operations]
- Please read "Caution on Performing Secondary Operations" (Page 192) when performing modifications and/or secondary operations for safety concerns. KHK Quick-Mod Gears, the KHK's system for quick modification of KHK stock gears is also available.
 - If gear tooth hardening, or thermal refining, is applied, the decarburization layer (approx. 0.5 mm thickness) on the rectangular surfaces cannot have the hardness you designate.
 - Avoid hardening Racks with bolt holes, due to deformation occurring at the mounting hole and the difficulty of straightening after hardening.

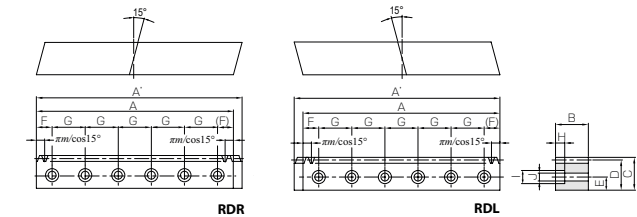

RDR **RDL**