




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



T1

Catalog Number	Module	No. of teeth	Shape	Outside dia.	Pitch dia.	Outside dia.	Face width	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
				A	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability		
SIR2-120 SIR2-200	m2	120 200	T1	236 396	240 400	286 446	20	413 677	68.8 110	42.1 69.0	7.02 11.2	0.12~0.28	2.98 4.80
SIR2.5-120 SIR2.5-200	m2.5	120 200		295 495	300 500	355 555	25	807 1320	138 220	82.3 135	14.0 22.5	0.14~0.31	5.55 8.94
SIR3-120 SIR3-160	m3	120 160		354 474	360 480	424 544	30	1390 1840	244 315	142 188	24.9 32.1	0.15~0.35	9.28 12.1

- [Caution on Product Characteristics] ① The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SS spur gear.
- ② The allowable torques shown in the table are calculated values according to the assumed usage conditions. Please see Page 207 for more details.
- ③ Please check for the involute interference, trochoid interference and trimming interference prior to using internal gears.
- [Caution on Secondary Operations] ① Please read “Cautions on Performing Secondary Operations” (Page 207) when performing modifications and/or secondary operations for safety concerns.
- KHK Quick-Mod Gears, the KHK system for quick modification of KHK stock gears, is also available.
- ② Avoid performing secondary operations that narrow the tooth width, as it affects precision and strength.

Established equipment and technology
Custom gears are also available.

Diameter ϕ 700mm maximum, Module 6.5 maximum,
Cutting Stroke 170 mm



Gear cutting by CNC Gear Shaper



Racks

MRGF/MRGFD Hardened Ground Racks	KRGF-H/KRGFD-H Hardened Ground Racks	KRG/KRGF/KRGFD Thermal Refined Ground Racks	SRG/SRGF/SRGFD/SRGFK Hardened Ground Racks	KRF-H/KRFD-H Hardened Racks	SRF-H/SRFD-H Hardened Racks	SRF-HL/SRFD-HL Laser Hardened Racks
Material: SCM415 m1.5~3 Page 224	Material: SCM440 m1.5~3 Page 226	Material: SCM440 m1~3 Page 228	Material: S45C m0.5~6 Page 230	Material: SCM440 m1.5~5 Page 232	Material: S45C m1.5~6 Page 234	Material: S45C m1.5~6 Page 236
KRF/KRFD Thermal Refined Racks	SRAF/SRAFD/SRAFK Square Racks	SR Racks	SRF Steel Racks with Machined Ends	SRFD/SRFK Steel Racks with Bolt Holes	SUR/SURF/SURFD Stainless Steel Racks	DRF/DRFD/DRFK Plastic Racks
Material: SCM440 m1.5~5 Page 238	Material: S45C m1.5~4 Page 240	Material: S45C m0.5~10 Page 242	Material: S45C m0.5~10 Page 243	Material: S45C m0.5~6 Page 244	Material: SUS304 m1~4 Page 246	Material: Polyacetal m1~3 Page 248
PR/PRF Plastic Racks	BSR Racks	SRO/SROS Round Racks	SURO Stainless Steel Round Racks	DR Molded Flexible Racks	SSDR/ARL/SRS Rack Clamps for Pinions/Rack Guide Rails For Molded Flexible Racks	KRHG/KRHGF/KRHGFD Ground Helical Racks
Material: MC901 m1~3 Page 250	Material: Free cutting brass (C3604) m0.5~1 Page 251	Material: S45C m1~5 Page 252	Material: SUS303 m1~3 Page 253	Material: Duracon (R) (M25-44) m0.8~2 Page 254	Material: S45C, etc. Page 254	Material: SCM440 m1~3 Page 256
SRH/SRHF/SRHFD Helical Racks	SRHEF Helical Racks	SHE Helical Gears	ZST/ZSTD Hardened Ground Helical Racks	ZSTP Ground Helical Gears	ZST-GL Assembly Gauges	
Material: S45C m2, 3 Page 258	Material: S45C m1.5~6 Page 260	Material: S45C m1.5~6 Page 260	Material: DIN C45 (S45C equivalent) m2~6 Page 262	Material: SCM440 m2~6 Page 262	Material: S45C m1.5~6 Page 264	

Includes Made to Order

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Racks

K R G F 2 - 500 H

Gear teeth induction hardened
Total Length (500mm)
Module (2)
Other Products (End Machined)
Other Products (Ground Gears)
Type (Rack)
Material (SCM440)

Material
M SCM415
K SCM440
S S45C
SU Stainless Steel
BS Brass
P MC901
D Polyacetal

Type
R Racks
RH Helical Racks
RO Round Racks
S Spur Gears
H Helical Gears

Other Information
F Racks with Machined Ends
D Racks with Bolt Holes
K Racks with Drill Holes
G Ground Gears
H Gear teeth induction hardened
HL Laser hardened
ZST #####

Features



KHK stock racks are made for high precision linear motion applications. We offer a large selection of racks ranging from module 0.5 to 10 and lengths up to 2000 mm. The following table lists the main features.

Racks

Catalog Number Note 1	Module	Total Length mm Parentheses show no. of teeth	Material	Heat Treatment	Tooth Surface Finish	Gear accuracy KHK R 001 Note 3 Parentheses show JIS B 1702-1	Features
MRGF/MRGFD	1.5~3	500	SCM415	Tooth area carburized	Ground	1	Racks that have been carburized and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for tooth.
KRGF-H KRGFD-H	1.5~3	500, 1000	SCM440	Thermal refined, gear teeth induction hardened	Ground	1	Racks that have been tempered, hardened and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for tooth.
KRG/KRGF/ KRGFD	1~3	100, 500, 1000	SCM440	Thermal refined	Ground	1	Racks that have been tempered and ground that have excellent accuracy and strength.
SRG/SRGF SRGFD/SRGFK	0.5~6	100, 300, 500, 1000	S45C	Gear teeth induction hardened NOTE 2	Ground	3	Racks that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for tooth.
KRF-H/KRFD-H	1.5~5	1000	SCM440	Thermal refined, gear teeth induction hardened	Cut	5	Racks that have been tempered and hardened that have excellent strength and wear resistance. Secondary operations are possible except for tooth.
SRF-H SRFD-H	1.5~6	1000	S45C	Gear teeth induction hardened	Cut	5	Racks that have been hardened with excellent wear resistance. Secondary operations are possible except for tooth.
SRF-HL SRFD-HL	1.5~6	1000, 1500, 2000	S45C	Gear teeth laser hardened	Cut	4	Racks that have been laser hardened with a good balance of wear resistance and cost. Secondary operations are possible except for tooth.
KRF/KRFD	1.5~5	500, 1000	SCM440	Thermal refined	Cut	4	Racks that have been tempered with excellent strength.
SRAF/SRAFD SRAFK	1.5~4	1000, 2000	S45C	—	Cut	4	These racks have smaller tooth height in comparison to SRF Racks.
SR/SRF SRFD/SRFK	0.5~10	100, 300, 500, 1000, 1500, 2000	S45C	—	Cut	4	Many lineups are available at a low price and excellent usability.
SUR/SURF SURFD	1~4	500, 1000	SUS304	Solution treated	Cut	5	Stainless steel racks with rust resistance.
DRF/DRFD DRFK	1~3	500, 1000	Polyacetal	—	Cut	5	Racks made of polyacetal with shorter overall length than nylon, making them suitable for joining together.
PR/PRF	1~3	500, 1000	MC901	—	Cut	5	Nylon racks can be used with no lubrication.
BSR	0.5~1	300	Free-cutting Brass (C3604)	—	Cut	4	Brass racks with excellent machinability.
SRO/SROS	1~5	500, 1000	S45C	—	Cut	4	Round racks that are suitable when the rack side moves.
SURO	1~3	500, 1000	SUS303	—	Cut	5	Round racks made of stainless steel. Suitable when the rack side moves.
DR	0.8~2	2000	Duracon (R) (M25-44) NOTE 4	—	Injection Molded	8	Thin plastic racks that can be bent.
KRHG/KRHGF KRHGF	1~3	100, 500, 1000	SCM440	Thermal refined	Ground	1	Helical racks that have been tempered and ground with excellent accuracy that have higher strength and quietness as compared with KRGF.
SRH/SRHF SRHFD	2~3	100, 500, 1000	S45C	—	Cut	5	As they are helical racks, they have higher strength and quietness as compared with SRF.
SRHEF	1.5~6	1000	S45C	—	Cut	4	As they are helical racks, they have higher strength and quietness as compared with SRF. They can be used like CP racks.
ZST/ZSTD	2~6	1000, 2000	DIN C45 (JIS Grade S45C equivalent)	Gear teeth induction hardened	Ground	Grade 2 equivalent	Helical racks that have been hardened and ground that have excellent accuracy, wear resistance and quietness. They can be used like CP racks. Secondary operations are possible except for tooth.

Pinion

SHE	1.5~6	(18~30)	S45C	—	Cut	(N8)	SRHEF pinions that have excellent strength and quietness as compared with SS due to its helix.
ZSTP	2~6	(18~30)	SCM440	Thermal refined, gear teeth induction hardened	Ground	(N6)	ZST pinions with high accuracy that have excellent strength, wear resistance and quietness due to its helix. Secondary operations are possible except for tooth.

[NOTE 1] The catalog numbers of the above racks with (F) suffix have both ends machined so that they can be butted against each other. The items with (D) have mounting screw holes for immediate assembly.

[NOTE 2] Products with module under 1 are thermal refined, without their gear teeth being induction hardened.

[NOTE 3] Precision grade standard of racks are set by KHK. Please see "Precision of Racks" in Selection Hints section for details.

[NOTE 4] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.


- KHK stock racks have round semi-topping at the corners of the top land of the gear tooth.
- Black products are KHK stock gears that have an applied black oxide coating for rust resistance.

Application Examples




KHK stock racks & pinions are adopted in driving devices for all kinds of linear motion systems, including transport devices.



Circular saw cutting machine HS-400 manufactured by Kooki Co., Ltd.

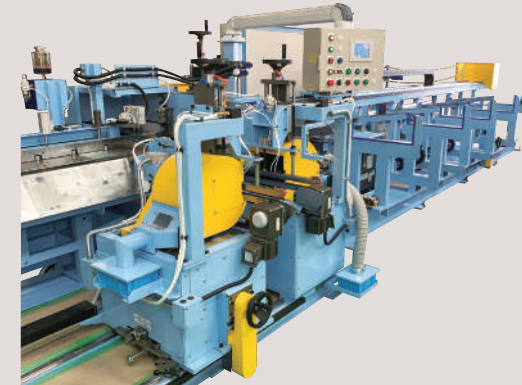

SRFD racks and SSG spur gears used for automatic and manual drive for cutting, machining of both ends and deburring

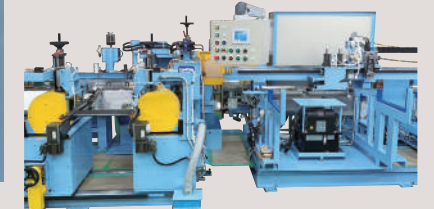


Clamp Seamer Welder

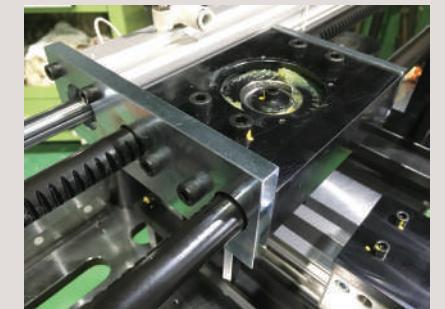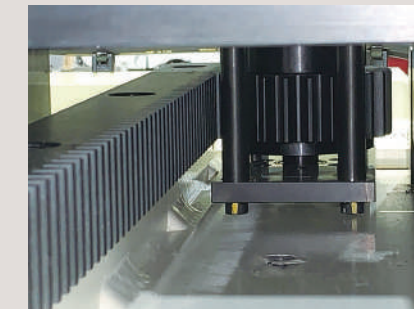

The SRCPFD racks and SSCP spur gears used to drive weld torches at constant speed, and the SRO round racks and SS spur gears used to position workpieces

Automatic packaging machine manufactured by Toyota Machinery Co., Ltd.

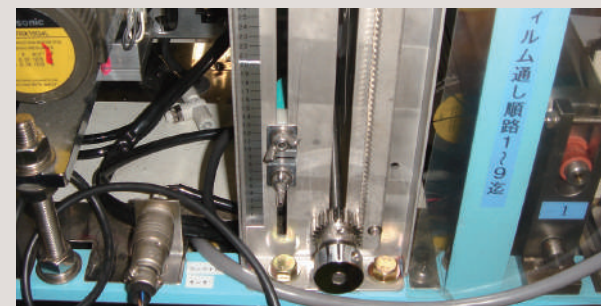

SUR stainless steel rack used for film winding tension part

Dremax Long Strip Cutter



PR plastic rack used for feeding Long Strip Cutter




Lathe Auto Loader



SRO Round Rack used as a workpiece storage device (lifting/lowering table)

Lathe Gantry Loader

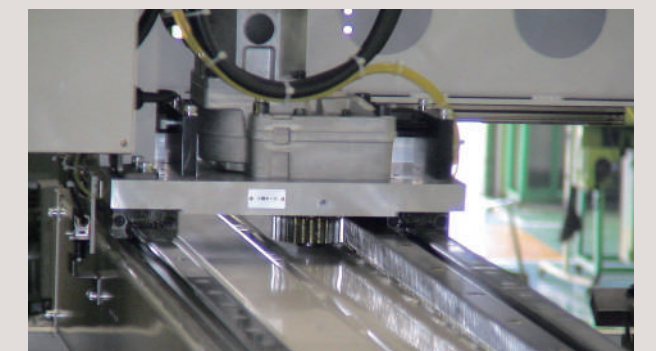

KRG Ground Rack used as a workpiece conveying device

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable “CAUTION” notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

- With the exception of helical racks, KHK stock racks can mate with any spur gears of the same module. Products with different tooth width can also be mated as a pinion.
- See the table on the right for the mating gears of the helical racks.
Be sure to check the combination of helix direction (right or left) when selecting.

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

■ Calculation of Bending Strength of Gears

Racks							Pinion					Racks			
Catalog Number Item	MRGF MRGFD	KRGF-H KRGFD-H KRF-H KRFD-H	KRG/KRGF KRGFD KRHG/KRHGF KRHGFD/KRF KRFD	SRG/SRGF SRGFD/SRGFK SRF-H/SRFD-H ZST/ZSTD	SRF-HL SRFD-HL	SRAF/SRAFD SRAFK/SR/SRF SRFD/SRFK/SRO SROS/SRH/SRHF SRHFD/SRHEF	SUR SURF SURFD SURO	BSR	SHE	ZSTP	DRF DRFD DRFK	PR PRF	DR		
Formula NOTE 1	Formula of spur and helical gears on bending strength (JGMA401-01)										The Lewis formula				
No. of teeth of mating gears	30 Note 2									Racks		(30)			
Rotational Speed of Pinion	100rpm										(100rpm)				
Design Life (Durability)	Over 10 ⁷ cycles										Allowable bending stress (kgf/mm ²)				
Impact from motor	Uniform load										1.0 (40°C with No Lubrication) 1.15 (40°C with No Lubrication) <i>m</i> 0.8 4.0 <i>m</i> 1.0 3.5 <i>m</i> 1.5 1.8 NOTE 4 <i>m</i> 2.0 1.2 (40°C with Grease Lubrication)				
Impact from load	Uniform load														
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)														
Allowable bending stress at root σ_{Flim} (kgf/mm ²)	47	32		20 NOTE 3				10.5	4	19	30				
Safety factor S_F	1.2														

■ Calculation of Surface Durability (Except where it is common with bending strength)

Formula NOTE 1	Formula of spur and helical gears on surface durability (JGMA402-01)									
Kinematic viscosity of lubricant	100cSt(50°C)									
Gear support	Supported on one end.									
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	112	79	90 NOTE 3	80	52.5	41.3	-	49	112
Safety factor S_H	1.15									

- [NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, “MC Nylon Technical Data” by Mitsubishi Chemical Advanced Materials and “Duracon (R) Gear” by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.
- [NOTE 2] No. of mating teeth in the ZST and ZSTD racks is the “minimum number of teeth” of the ZSTP pinion. The No. of mating teeth in the SRHEF racks is also calculated by the “minimum number of teeth” of the SHE pinion.
- [NOTE 3] For SRG, or SRGF Ground Racks, with a module less than m0.8, the allowable bending stress and allowable hertz stress are respectively 24.5 (kgf/mm²) and 62.5 (kgf/mm²).
- [NOTE 4] The values for DR m 1.5 racks were assumed by KHK. Usage conditions for SSCR (DR Rack Pinion) are the same for the SSCP Pinion, shown on Page 269.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 216.

- Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.
Website URL: <https://khkgears.net/new/>
Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

■ Mating Helical Gear Selection Chart (○ Allowable × Not allowable)

Catalog Number and Direction of Helix		KRHG KRHGF		ZST ZSTD		SRHEF		SRH/SRHF SRHFD	
		RH	LH	RH	LH	RH	LH	RH	LH
KHG	LH	○	×	×	×	×	×	×	×
	RH	×	○	×	×	×	×	×	×
ZSTP	LH	×	×	○	○	×	×	×	×
SHE	LH	×	×	○	○	×	×	×	×
SH	LH	×	×	×	×	×	○	×	×
	RH	×	×	×	×	×	×	○	○



Selecting the Gears

Step 1

Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

■ For provisional selection from this catalog

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)	Allowable force (kgf)
KRG1-100	m1	20	R1	98	10	15	14	1330	641
KRG1.5-100	m1.5	20	R1	101	15	20	18.5	1440	352
KRG2-100	m2	11	R1	100	25	30	27.5	6130	2560
KRG3-100	m3	9	R1	101	30	35	32	9580	4010

Step 3


Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. Please see our separate technical reference book for more details. We recommend using the Website that allows the strength to be easily calculated.

■ Use the strength calculation function on our website.

■ Bending strength

Calculated values of the strength at which the gear teeth do not break due to fatigue.



Example of failure due to insufficient bending strength

■ Surface durability

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.



Example of wear due to insufficient surface durability

Product Precautions



Common Notes

[Caution on Product Characteristics]

- (1) The allowable forces shown in the table are calculated values according to the assumed usage conditions. Please see Page 214 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of recommended pinions with the same pitch.
- (3) There is a decarburized layer on the surface, so 0.5mm or so will not be at the specified hardness.
- (4) After attaching the racks to the base, fasten with dowel pins. Clamping only with mounting screws could possibly cause the screws to be broken, due to a heavy load.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 221 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Up to 20 units can be handled; for larger orders, please request a price and delivery quote.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.

MRGF Hardened Ground Racks

[Caution on Secondary Operations]

- (1) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

KRF-H Hardened Racks

[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRF-H Hardened Racks

[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRF-HL Laser Hardened Racks

[Caution on Secondary Operations]

- (1) Due to the gear teeth being laser hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 1 mm).

SRFD Steel Racks with Bolt Holes

[Caution on Secondary Operations]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SUR(F,D) Stainless Steel Racks

[Caution on Product Characteristics]

- (1) The stainless steel material is given solution treatment and passivation.

DRF(D,K) Plastic Racks

[Caution on Product Characteristics]

- (1) Boiling sterilization is not required when using this product in food machines. Note that POM plastic complies with the Food Sanitation Law of the US Food and Drug Administration (FDA), and boiling or exposing it to steam will cause the material to be damaged.

Product Precautions



PR(F) Plastic Racks

[Caution on Product Characteristics]

- (1) These plastic racks expand and contract depending on the temperature and humidity. The length per 1m changes by 0.45 mm when the temperature changes by 10°C, and about 5 mm with water absorption of 2%.The bending is 5 mm or less per 1 m, but may exceed 5 mm over time in products with total length 1000 mm. Mount for use while correcting along the gear cutting reference surface (bottom).

SRO(S) Round Racks

[Caution on Product Characteristics]

- (1) Because this is extruded material, the outer diameter may be out of H9 tolerance in parts.

[Caution on Secondary Operations]

- (1) Avoid hardening round racks, due to twisting and deformation occurring and the difficulty of straightening the rack after hardening.

SURO Stainless Steel Racks

[Caution on Product Characteristics]

- (1) Because this is extruded material, the outer diameter may be out of H9 tolerance in parts.

DR Molded Flexible Racks

[Caution on Product Characteristics]

- (1) When using the DR flexible rack in an arc, the minimum bending radius (R) is 150 mm for both the external and internal teeth. This increases the pitch errors and tooth profile errors which prevent the teeth from meshing at the normal center distance, so be sure to make adjustments before use.
- (2) It cannot be used where positioning accuracy is required.
- (3) For the dimensional tolerance of each part, see the dimensional tolerance of molded items in the separate table.

SRS Rack Clamps

[Caution on Product Characteristics]

- (1) M4 x 12 pan head machine screws with cross holes are included.
- (2) The set includes a rack clamp and 10 machine screws.

KRHG(F,D) Ground Helical Racks

[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

SRH(F) Helical Racks

[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

SRHFD Helical Racks

[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

[Caution on Secondary Operations]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SRHEF Helical Racks
[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.
- (3) For the assembly joining gauge, use ZST-GL on Page 264.

SHE Helical Gears
[Caution on Product Characteristics]

- (1) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of SRHEF Helical Racks with the same pitch.

ZST(D) Hardened Ground Helical Racks
[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

ZSTP Ground Helical Gears
[Caution on Product Characteristics]

- (1) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of ZST Helical Racks with the same pitch.

[Caution on Secondary Operations]

- (1) Because of the influence of hardening residual stress, avoid removing the entire boss, as it may cause the gears to deform.

3. Cautions on Selecting Racks By Precision

The precision standards of KHK stock racks are established by us.
The table below indicates the tolerance ranges of our racks.

① Pitch Errors of Racks (KHK R 001)

Our precision grades for pitch errors are established by referring to old JIS Standards. The precision grades are set from 1 to 8, in accordance with the tolerance of a single pitch error (S.P.E.), adjacent tooth-to-tooth error (T.T.E.), and the total composite error (T.C.E.) for each module and length.

■ Precision Grades of Racks

Unit: μm



Grade	Pitch Error	Over $m0.4$ to 1 CP2.5		Over $m1$ to 1.6 CP5		Over $m1.6$ to 2.5 -		Over $m2.5$ to 4 CP10		Over $m4$ to 6 CP15		Over $m6$ to 10 CP20	
		Rack Length (nominal)											
		1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000
1	S.P.E.	10	-	10	12	11	12	11	13	13	14	14	16
	T.C.E.	28	-	29	33	30	35	32	37	35	40	40	45
2	S.P.E.	14	-	14	17	15	17	16	18	18	20	20	23
	T.C.E.	39	-	41	48	43	49	46	53	50	57	58	64
3	S.P.E.	20	-	20	24	21	25	23	26	25	29	29	32
	T.C.E.	56	-	57	67	60	70	64	74	71	80	81	91
4	S.P.E.	28	-	29	33	30	35	32	37	35	40	40	45
	T.C.E.	79	-	81	95	85	99	91	105	100	115	115	130
5	S.P.E.	39	-	41	48	43	49	46	53	50	57	58	64
	T.C.E.	110	-	115	135	120	140	130	145	140	160	160	180
8	S.P.E.	206	206	212	212	219	219	-	-	-	-	-	-

[NOTE] ① Since the pitch accuracy of racks may vary due to humidity, the precision grades are evaluated at the bottom surface of the product, at the temperature of 20°C. The dimensions of the KHK PR Plastic Racks may vary widely due to humidity. Therefore, the total composite error is assumed to be excluded from this accuracy standard.
② For the accuracy of CP Rack, convert CP to m (module) when reference is made to the data in the table. ($m = \text{CP} / \pi$).

■ Comparison Table of Precision Grades of Racks


KHK R001	1	2	3	4	5	6	7	8
DIN 3962	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12

* Values in the table are guidelines only and not guaranteed values.
* In the gray area, there are no equivalent products for stock gears.

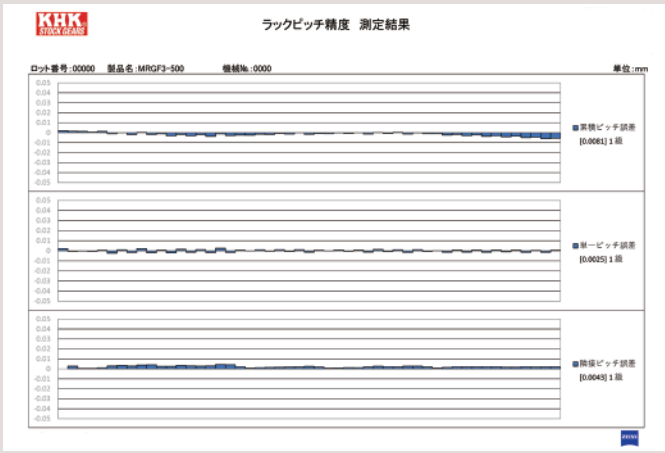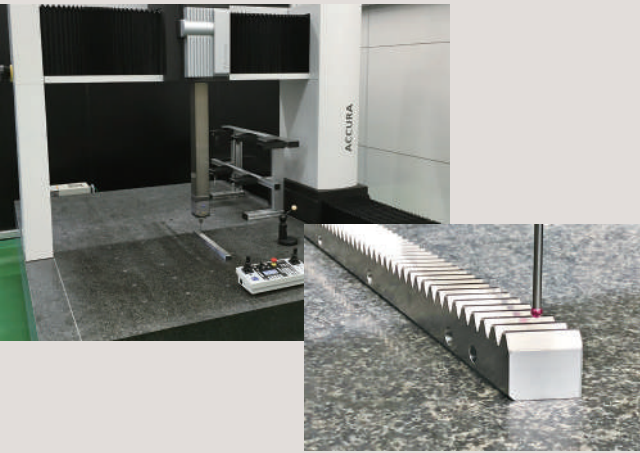■ Pitch inspection and a sample report using Karl Zeiss ACCURA Coordinate Measuring Machine. (KHK R 001 Grade 1)


② Precision of Rack Blanks

■ Tolerances for Face Width and Height

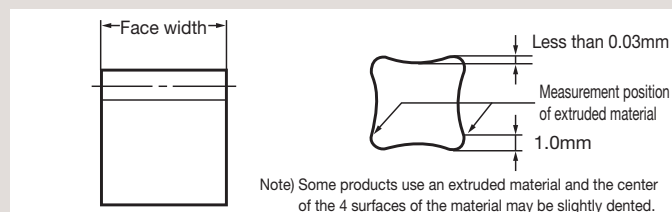


Unit: mm

Precision grade (KHK R 001)	Grade 1	Grade 2	Grades 3 to 5
Face width			
8 or less	0 -0.05	0 -0.10	0 -0.22
9 to 10		0 -0.10	0 -0.27
11 to 18		0 -0.10	0 -0.33
19 to 30		0 -0.15	0 -0.39
31 to 50		0 -0.15	0 -0.46
51 to 90		0 -0.15	0 -0.46

[NOTE] Dimensional tolerance of hardened products is that prior to hardening. Dimensional tolerance for plastic racks is the value obtained when machining is performed, and may increase slightly due to aging.
* BSR products are not applicable.

■ Maximum Curvature Values (Flatness Tolerance L)

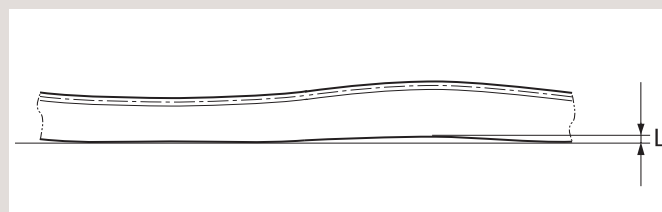

Unit: mm

Precision grade (KHK R 001)	Grade 1 & 2	Grade 3	Grade 4 & 5
Length (nominal)			
500	0.05	0.1	0.2
1000	0.1	0.2	0.3
1500	—	—	0.3
2000	—	—	0.4

[NOTE] The straightness tolerances of round racks are 0.15/500 mm and 0.2/1000 mm.
Plastic racks change over time so are excluded from this precision standard.

■ Tolerance on Total Length

Unit: mm

Product Type	Module	Dimensional Tolerance
F Type End Machined Product	m0.5	$\begin{pmatrix} -0.1 \\ -0.3 \end{pmatrix}$
	m0.8(CP2.5)	$\begin{pmatrix} -0.1 \\ -0.5 \end{pmatrix}$
	m1 up to 2.5	$\begin{pmatrix} -0.2 \\ -0.6 \end{pmatrix}$
	m2.5 or more	$\begin{pmatrix} -0.2 \\ -0.8 \end{pmatrix}$
FRCP and DR Flexible Racks	Uniform	±10
Products other than the above	Uniform	+3 -2

[NOTE] For Type-F racks with machined ends, the dimensional tolerance is a calculated value according to assumed usage conditions, without consideration of pitch errors and aged deterioration.

③ Backlash of Racks & Pinions

■ Backlash of Racks & Pinions (Circumferential)

Unit: mm

Module	CP	Precision Grade (KHK R 001)												
		Grade 1		Grade 2	Grade 3	Grade 4		Stainless Steel	Grade 5		Hardened	Thermal Refined + Hardened	MC nylon	POM * Excludes
		Straight	Helical			Excludes thermal refined racks	Includes thermal refined racks		Helical	SRHF				
m0.5	-	-	-	-	0.11 0.00	0.13 0.00	-	-	-	-	-	-	-	-
m0.8	CP2.5	-	-	-	0.12 0.00	0.14 0.00	-	-	-	-	-	-	-	-
m1	-	-	-	-	0.19 0.04	0.21 0.04	-	0.23 0.04	-	-	-	-	0.39 0.18	0.36 0.15
m1.5	CP5	0.14 0.04	0.15 0.05	0.14 0.04	0.19 0.04	0.25 0.09	0.27 0.09	0.27 0.09	-	0.28 0.10	0.29 0.05	0.31 0.05	0.42 0.21	0.39 0.18
m2	-	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.28 0.11	0.30 0.11	0.30 0.11	0.31 0.12	0.32 0.12	0.32 0.07	0.34 0.07	0.45 0.24	0.42 0.21
m2.5	-	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.31 0.13	0.33 0.13	0.33 0.13	-	0.35 0.14	0.35 0.09	0.37 0.09	0.49 0.26	0.46 0.23
m3	CP10	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.35 0.14	0.37 0.14	0.37 0.14	0.38 0.15	0.39 0.15	0.39 0.10	0.41 0.10	0.56 0.32	0.52 0.28
m4	-	-	-	0.16 0.05	0.21 0.05	0.42 0.18	0.44 0.18	0.44 0.18	-	0.47 0.19	0.46 0.14	0.48 0.14	-	-
m5	CP15	-	-	0.17 0.05	0.22 0.05	0.47 0.20	0.49 0.20	-	-	0.52 0.21	0.51 0.16	0.53 0.16	-	-
m6	CP20	-	-	0.17 0.05	0.22 0.05	0.54 0.22	-	-	-	0.57 0.23	0.58 0.18	-	-	-
m8	-	-	-	-	-	0.63 0.28	-	-	-	-	-	-	-	-
m10	-	-	-	-	-	0.70 0.33	-	-	-	-	-	-	-	-

Application Hints



In order to use KHK stock racks safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail info@khkgears.net

1. Cautions on Handling

- KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- Depending on the handling method, the product may become deformed or damaged. Long racks and plastic racks deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations

- Secondary operations can be performed on all KHK stock racks except for the racks with their gear teeth induction hardened. To avoid problems of gear precision, do not reduce the face width.
- Height of pitch lines of racks are controlled by measuring the bottom surface as the reference datum and over-pin measurements on tooth thickness. If you machine the bottom surfaces, the precision of the racks may be affected.
- When connecting two racks, the machining of the mating ends requires careful consideration in terms of the pitch (p) accuracy. The meshing will be poor if the pitch straddling the connection has a positive tolerance. We recommend a minus tolerance on pitch of at the connection.
The below is an indication of pitch tolerance for each module.




Module	Pitch (p)	Tolerance
m0.5	1.57	-0.05 -0.15
m0.8	2.51	-0.05 -0.25
m1	3.14	-0.1 -0.3
m1.5	4.71	
m2	6.28	
m2.5	7.85	
m3	9.42	-0.1 -0.4
m4	12.57	
m5	15.71	
m6	18.85	
m8	25.13	
m10	31.42	

- To use dowel pins to secure racks, attach the racks to the base and drill both simultaneously.
- Products made of S45C and SCM440 can be induction hardened. However, the precision is decreased. There is a decarburized layer (about 0.5 mm) on the block surface. The hardness of the decarburized layer does not increase even if it is quenched.
- To be able to handle parts safely, all burrs and sharp corners should be removed after the secondary operations are done.
- If you are going to modify the gear by gripping the teeth, please exercise caution not to crush the teeth by applying too much pressure.


3. Points of Caution during Assembly

- The recommended assembly distance tolerance of KHK stock racks is H7 for ground racks and H8 for cut racks. Flexible racks need to be adjusted by the customer. The backlash values are given in the table on Page 220. Make sure that the mounting distance stays constant for the length of the rack.

Mounting distance a = Height of pitch line of rack + Pitch radius of pinion

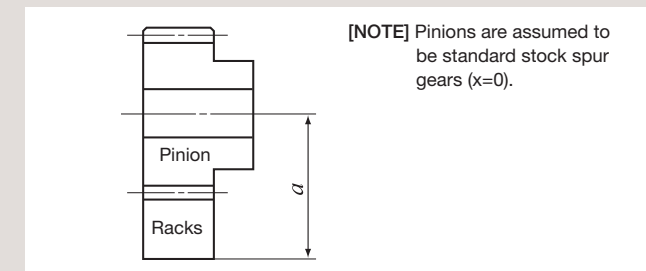


- The recommended flatness and squareness of the mounting surface of KHK stock racks is 0.01 mm for ground racks and 0.05 mm for cut racks.

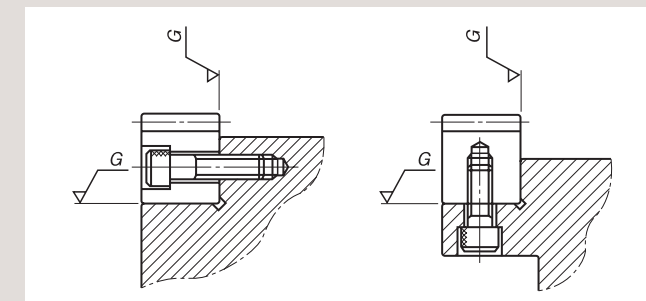

- If the racks are not secured properly to the base, they could shift during operation and cause unexpected problems. It is very important to insure firm mounting by the use of dowel pins or similar devices.
- Machined end type racks such as SRF and SRFD series have smaller pitch tolerance at the end face. If you try to connect the racks without any space, the pitch at the connection will be too small and will cause problems. Please follow the diagrams for assembly on the next page.
- With SRFD etc., if using more than 10 racks connected together to form a rack with mounting holes machined along a length of 1 meter, the pitch precision and machining precision may cause the rack and base mounting holes to deviate, leading to set screw interference with the counterbored hole and preventing mounting. When using a rack for long lengths such as 10 meters or 20 meters, have the mounting holes additionally machined into long holes.


As an example of Rack Joining, we recommend the following method.

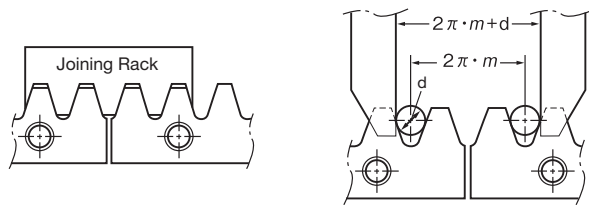

[NOTE] Joining gauge racks for helical racks must have the opposite hand from the racks. Please use 100 mm short racks as a joining gauge rack, or alternatively the rack of the same specifications on hand.



How to mount racks on a mounting base (For SRFD2-1000)

1. Pitch alignment
Place SRFD2-1000 on the mounting base, align SR2-100 and temporarily tighten the bolt.


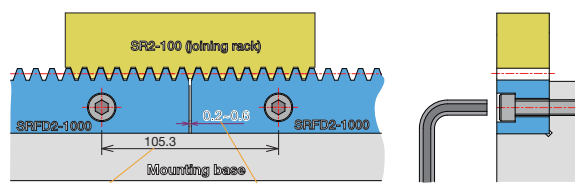


Dimensions Table F Value x 2
SRFD2-1000 is designed to have a gap of 0.2 to 0.6 mm.

2. Securing to the mounting base
Tap with a plastic hammer, bring it into close contact with the mounting base, and further tighten the bolt.
(When using a metal hammer, be careful not to damage the gear teeth by using a stiffening plate, etc.)

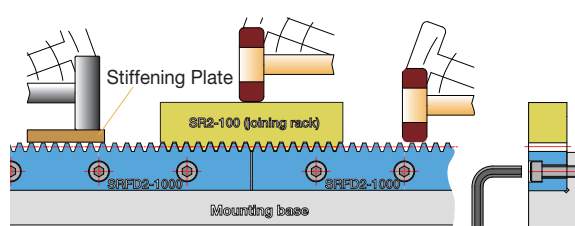

3. Run the pinion and check the following
① Is there abnormal noise or vibration?
② Is the backlash appropriate?
③ Is there poor edge contact of gear teeth?

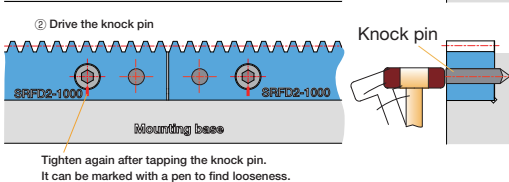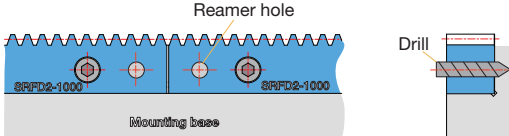

4. Cautions on Starting

- Check the following items before starting.
 - Are the gears installed securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
(Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

Warning: Precautions for preventing physical and property damage

- When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
- Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - Turn off the power switch.
 - Do not reach or crawl under the product.
 - Wear appropriate clothing and protective equipment for the work.

Caution Cautions in Preventing Accidents


- Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
- Avoid use in environments that may adversely affect the product.
- Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.

Comparison of Racks & Pinions and Ball Screws


Since racks have a simple mechanism, the material, hardening, strength and precision can be designed according to the environment. They are also inexpensive, with parts that can be purchased separately for replacement.

In the designing process, please refer to Features of Racks & Pinions and Ball Screws in the table below.

Racks & Pinions

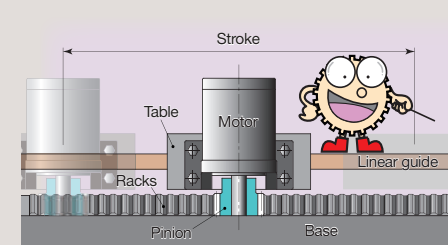

Ball screw

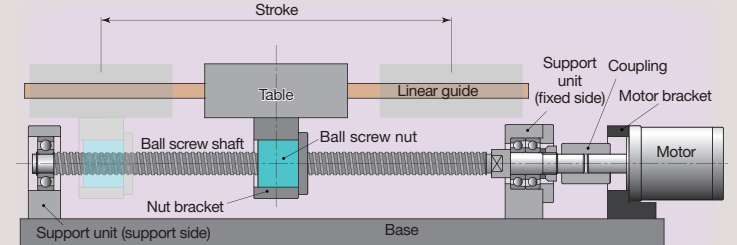

Features of Racks & Pinions

Advantages	Details
Few component parts	Since it does not have parts such as balls and retainers, there is less risk of accidentally falling apart during assembly and disassembly.
Supports heavy loads	Racks with large module can be used for heavy loads.
High transmission efficiency	High transmission efficiency of about 98% (excluding lubrication oil stirring resistance and bearing resistance).
High transport speed	The transport speed can be increased.
No length limit	The racks can be connected and used for a long period of time.
Flexible production is available	Materials, hardening, shapes and the like can be designed flexibly, allowing easy adjustment to the machine.
High-precision products can be manufactured	Gear grinding can be provided to minimize pitch error.
Can be used for food-related machinery	MC nylon and stainless steel products can be manufactured.

Disadvantages

Disadvantages	Details
Backlash is present	Backlash is required for smooth rotation. Backlash may become a problem in forward/reverse rotation positioning.
Lubrication is required	Metal racks require lubrication. Plastic racks do not require lubrication at light loads, but their precision is lower.


Features of Ball Screws

Advantages	Details
High transmission efficiency	Transmission efficiency of 90% or higher.
High-precision products can be manufactured	High-precision ball screws can be manufactured by grinding.
No backlash	The use of pressure eliminates backlash.

Disadvantages

Disadvantages	Details
Length is limited	There is a limit to the length due to the deflection of the screws.
Hard to manufacture special products	Since it is hard to manufacture special products, machines must be adjusted to the shape of the ball screw.

Laser Hardened Racks

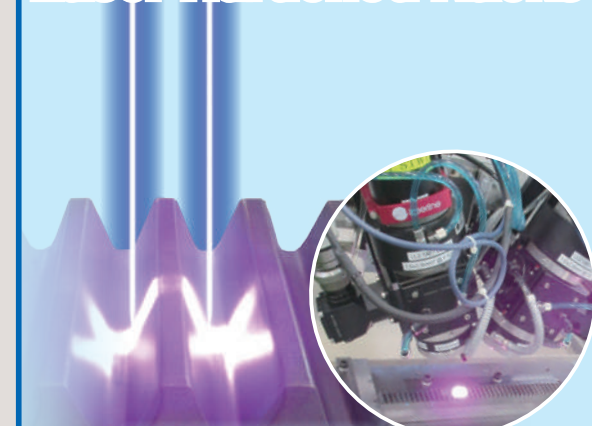

Lasers used for hardening gear teeth

In this environmentally friendly hardening method, powerful light provides instantaneous hardening and cooling water is not required due to diffusion of heat.

Can be hardened on surfaces other than the teeth


Lasers excel at spot hardening. As long as the laser can be irradiated, even the inside of bores can be hardened.

Less distortion due to burning during hardening

As the laser hardens necessary areas in spots, distortion due to burning can be minimized.

Lasers enable hardening that barely changes the precision grade.


* Please see Page 236 for products.





Specifications	
Precision grade	KHK R 001 Grade 1 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC


* The precision grade of J Series products is equivalent to the value shown in the table.

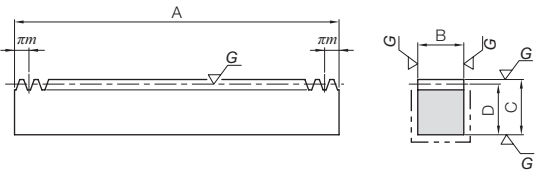

RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
MRGF1.5-500	m1.5	106	RF	499.51	15	20	18.5	5070	4620	517	472
MRGF2-500	m2	80		502.65	20	25	23	9010	8240	918	840
MRGF2.5-500	m2.5	64		502.65	25	30	27.5	14100	12900	1440	1310
MRGF3-500	m3	53		499.51	30	35	32	20300	18600	2070	1900

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● MRGFD1.5-500J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
● MRGFD2-500J	m2	80		502.65	20	25	23	10	26.33			M6
● MRGFD2.5-500J	m2.5	64		502.65	25	30	27.5	12	26.33			M8
● MRGFD3-500J	m3	53		499.51	30	35	32	14	24.76			M10

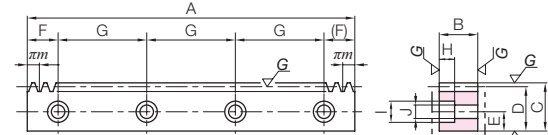

RD



Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	1.09	MRGF1.5-500
0.05~0.16	1.82	MRGF2-500
0.05~0.16	2.71	MRGF2.5-500
0.05~0.16	3.76	MRGF3-500

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number ● : J Series (Available-on-request)
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	5070	4620	517	472	0.04~0.14	1.07	● MRGFD1.5-500J
7	11	7	9010	8240	918	840	0.05~0.16	1.78	● MRGFD2-500J
8.6	14	9	14100	12900	1440	1310	0.05~0.16	2.64	● MRGFD2.5-500J
10.8	17.5	11	20300	18600	2070	1900	0.05~0.16	3.63	● MRGFD3-500J

Surface durability is
4 times higher than SRG Hardened Ground Racks,
2 times higher than KRG-H Hardened Ground Racks.

Recommended Mating Pinions




MSGA/MSGB Ground Spur Gears

Please see Page 50 for more details.

DLS Schmiersysteme
Rack & Pinion Lubrication System

PUS lubricated spur gear

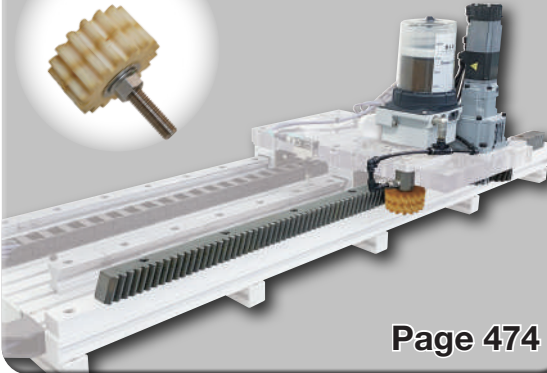

Page 474






Hardened Ground Racks



Specifications	
Precision grade	KHK R 001 Grade 1 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

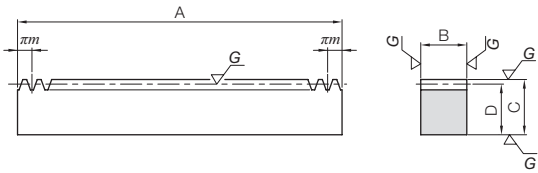


RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRGF1.5-500H KRGF1.5-1000H	m1.5	106 212	RF	499.51 999.03	15	20	18.5	3450	2100	352	215
KRGF2-500H KRGF2-1000H	m2	80 160		502.65 1005.31	20	25	23	6130	3750	625	382
KRGF2.5-500H KRGF2.5-1000H	m2.5	64 128		502.65 1005.31	25	30	27.5	9580	5870	977	598
KRGF3-500H KRGF3-1000H	m3	53 106		499.51 999.03	30	35	32	13800	8470	1410	863

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRGFD1.5-500HJ ● KRGFD1.5-1000HJ	m1.5	106 212	RD	499.51 999.03	15	20	18.5	8	24.76 49.51	150 180	4 6	M5
● KRGFD2-500HJ ● KRGFD2-1000HJ	m2	80 160		502.65 1005.31	20	25	23	10	26.33 52.65	150 180	4 6	M6
● KRGFD2.5-500HJ ● KRGFD2.5-1000HJ	m2.5	64 128		502.65 1005.31	25	30	27.5	12	26.33 52.65	150 180	4 6	M8
● KRGFD3-500HJ ● KRGFD3-1000HJ	m3	53 106		499.51 999.03	30	35	32	14	24.76 49.51	150 180	4 6	M10

J Series

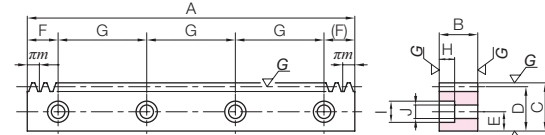

RD



Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	1.09 2.18	KRGF1.5-500H KRGF1.5-1000H
0.05~0.16	1.82 3.63	KRGF2-500H KRGF2-1000H
0.05~0.16	2.71 5.43	KRGF2.5-500H KRGF2.5-1000H
0.05~0.16	3.76 7.53	KRGF3-500H KRGF3-1000H

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3450	2100	352	215	0.04~0.14	1.07 2.14	● KRGFD1.5-500HJ ● KRGFD1.5-1000HJ
7	11	7	6130	3750	625	382	0.05~0.16	1.78 3.58	● KRGFD2-500HJ ● KRGFD2-1000HJ
8.6	14	9	9580	5870	977	598	0.05~0.16	2.64 5.31	● KRGFD2.5-500HJ ● KRGFD2.5-1000HJ
10.8	17.5	11	13800	8470	1410	863	0.05~0.16	3.63 7.32	● KRGFD3-500HJ ● KRGFD3-1000HJ

Recommended Mating Pinions




KSG Ground Spur Gears

Please see Page 54 for more details.

DLS Schmiersysteme Rack & Pinion Lubrication System

PUS lubricated spur gear

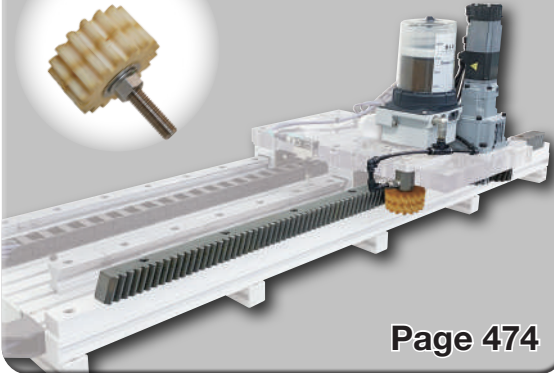


Page 474






Thermal Refined Ground Racks

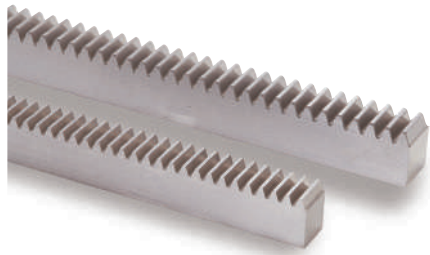


Specifications	
Precision grade	KHK R 001 grade 1
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB

* The precision grade of J Series products is equivalent to the value shown in the table.

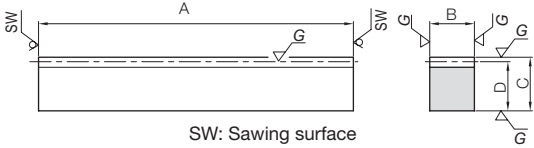


R1

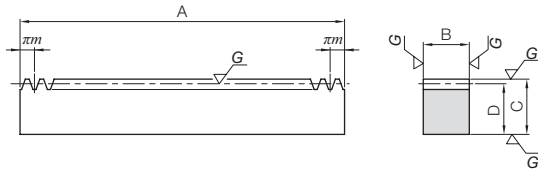

RF

J Series

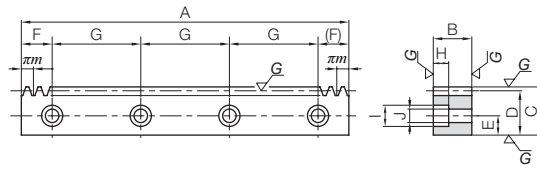

RD

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
KRG1-100	m1	29	R1	98	10	15	14	1530	641	156	65.3		
KRG1.5-100	m1.5	20		101	15	20	18.5	3450	1440	352	147		
KRG2-100	m2	14		98	20	25	23	6130	2560	625	261		
KRG2.5-100	m2.5	11		100	25	30	27.5	9580	4010	977	408		
KRG3-100	m3	9		101	30	35	32	13800	5770	1410	588		

Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
KRGF1-500	m1	159	RF	499.51	10	15	14	1530	641	156	65.3		
KRGF1-1000		318		999.03									
KRGF1.5-500	m1.5	106		499.51	15	20	18.5	3450	1440	352	147		
KRGF1.5-1000		212		999.03									
KRGF2-500	m2	80		502.65	20	25	23	6130	2560	625	261		
KRGF2-1000		160		1005.31									
KRGF2.5-500	m2.5	64		502.65	25	30	27.5	9580	4010	977	408		
KRGF2.5-1000		128		1005.31									
KRGF3-500	m3	53		499.51	30	35	32	13800	5770	1410	588		
KRGF3-1000		106		999.03									

Catalog Number	Module	No. of teeth	Shape	Total Length				Mounting hole dimensions					
				A	B	C	D	E	F	G	No. of holes	Screw size	
● KRGFD1-500J	m1	159	RD	499.51	10	15	14	6	24.76	150	4	M4	
● KRGFD1-1000J		318		999.03					49.51	180	6		
● KRGFD1.5-500J	m1.5	106		499.51	15	20	18.5	8	24.76	150	4	M5	
● KRGFD1.5-1000J		212		999.03					49.51	180	6		
● KRGFD2-500J	m2	80		502.65	20	25	23	10	26.33	150	4	M6	
● KRGFD2-1000J		160		1005.31					52.65	180	6		
● KRGFD2.5-500J	m2.5	64		502.65	25	30	27.5	12	26.33	150	4	M8	
● KRGFD2.5-1000J		128		1005.31					52.65	180	6		
● KRGFD3-500J	m3	53		499.51	30	35	32	14	24.76	150	4	M10	
● KRGFD3-1000J		106		999.03					49.51	180	6		

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	0.11	KRG1-100
0.04~0.14	0.22	KRG1.5-100
0.05~0.16	0.35	KRG2-100
0.05~0.16	0.54	KRG2.5-100
0.05~0.16	0.76	KRG3-100

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	0.55	KRGF1-500
0.04~0.14	1.49	KRGF1-1000
0.04~0.14	1.09	KRGF1.5-500
0.04~0.14	2.18	KRGF1.5-1000
0.05~0.16	1.82	KRGF2-500
0.05~0.16	3.63	KRGF2-1000
0.05~0.16	2.71	KRGF2.5-500
0.05~0.16	5.43	KRGF2.5-1000
0.05~0.16	3.76	KRGF3-500
0.05~0.16	7.53	KRGF3-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			● : J Series (Available-on-request)
5	8	4.5	1530	641	156	65.3	0.04~0.14	0.54 1.08	●KRGFD1-500J ●KRGFD1-1000J
6	10	6	3450	1440	352	147	0.04~0.14	1.07 2.14	●KRGFD1.5-500J ●KRGFD1.5-1000J
7	11	7	6130	2560	625	261	0.05~0.16	1.78 3.58	●KRGFD2-500J ●KRGFD2-1000J
8.6	14	9	9580	4010	977	408	0.05~0.16	2.64 5.31	●KRGFD2.5-500J ●KRGFD2.5-1000J
10.8	17.5	11	13800	5770	1410	588	0.05~0.16	3.62 7.32	●KRGFD3-500J ●KRGFD3-1000J

* Module 10 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions




SSG Ground Spur Gears

Please see Page 58 for more details.

DLS Schmiersysteme Rack & Pinion Lubrication System

PUS lubricated spur gear

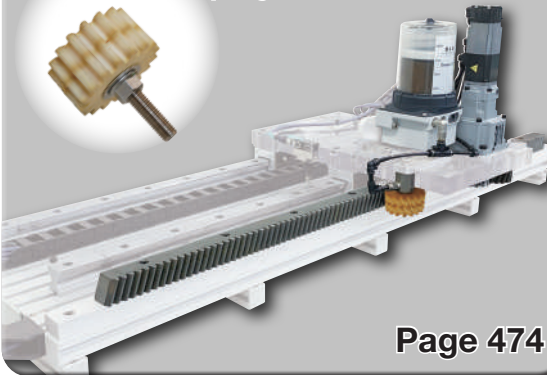

Page 474






SRG/SRGF/SRGFD/SRGFK Hardened Ground Racks


Module 0.5~6

Ground Racks

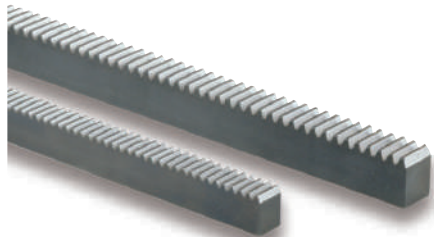

Specifications	
Precision grade	KHK R 001 Grade 3 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened **
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.
** Products with module less than 0.8 are not gear teeth hardened.
It is a tempered product with the teeth hardness of 200 to 270 HB.

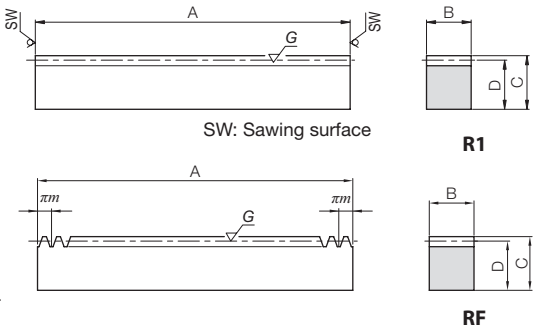

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRG0.5-100 (Made to Order)	m0.5	61	R1	101	5	12	11.5	293	80.5	29.9	8.21	0~0.11	0.046
SRG0.8-100 (Made to Order)	m0.8	38		101	8	12.3	11.5	751	206	76.6	21.0	0~0.12	0.073
SRG1-100	m1	29	R1	98	10	12	11	862	514	87.9	52.4	0.04~0.19	0.085
SRG1.5-100	m1.5	20		101	15	20	18.5	2160	1360	220	138	0.04~0.19	0.22
SRG2-100	m2	14		98	20	25	23	3830	2410	391	246	0.05~0.21	0.35
SRG2.5-100	m2.5	11		100	25	30	27.5	5990	3770	611	384	0.05~0.21	0.54
SRG3-100	m3	9		101	30	35	32	8620	5420	879	553	0.05~0.21	0.76
SRG4-100	m4	6		98	40	45	41	15300	9640	1560	983	0.05~0.21	1.26
SRG5-110	m5	5		108	50	50	45	24000	15100	2440	1540	0.05~0.22	1.91
SRG6-110	m6	4		111	60	60	54	34500	21700	3520	2210	0.05~0.22	2.82

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRGF0.5-300 (Made to Order)	m0.5	191	RF	300.02	5	12	11.5	293	80.5	29.9	8.21	0~0.11	0.14
SRGF0.8-300 (Made to Order)	m0.8	119		299.08	8	12.3	11.5	751	206	76.6	21.0	0~0.12	0.22
SRGF1-300	m1	96	RF	301.59	10	12	11	862	514	87.9	52.4	0.04~0.19	0.26
SRGF1-500		159		499.51									
SRGF1.5-500	m1.5	106		499.51	15	20	18.5	2160	1360	220	138	0.04~0.19	1.09
SRGF1.5-1000		212		999.03									
SRGF2-500	m2	80		502.65	20	25	23	3830	2410	391	246	0.05~0.21	1.82
SRGF2-1000		160		1005.31									
SRGF2.5-500	m2.5	64		502.65	25	30	27.5	5990	3770	611	384	0.05~0.21	2.71
SRGF2.5-1000		128		1005.31									
SRGF3-500	m3	53		499.51	30	35	32	8620	5420	879	553	0.05~0.21	3.76
SRGF3-1000		106		999.03									
SRGF4-500	m4	40	502.65	40	45	41	15300	9640	1560	983	0.05~0.21	6.47	
SRGF4-1000		80	1005.31										12.9
SRGF5-500	m5	32	502.65	50	50	45	24000	15100	2440	1540	0.05~0.22	8.88	
SRGF5-1000		64	1005.31										17.8
SRGF6-500	m6	26	490.09	60	60	54	34500	21700	3520	2210	0.05~0.22	12.5	
SRGF6-1000		53	999.03										25.4

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SRGFK1-300J	m1	96	RA	301.59	10	12	11	5	20.80	130	3	M4
SRGFK1-500J	m1	159		499.51	10	12	11	5	24.76	150	4	M4
SRGFD1.5-500J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
SRGFD1.5-1000J	m1.5	212		999.03	15	20	18.5	8	49.51	180	6	M5
SRGFD2-500J	m2	80		502.65	20	25	23	10	26.33	150	4	M6
SRGFD2-1000J	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
SRGFD2.5-500J	m2.5	64		502.65	25	30	27.5	12	26.33	150	4	M8
SRGFD2.5-1000J	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
SRGFD3-500J	m3	53		499.51	30	35	32	14	24.76	150	4	M10
SRGFD3-1000J	m3	106		999.03	30	35	32	14	49.51	180	6	M10
SRGFD4-500J	m4	40		502.65	40	45	41	18	26.33	150	4	M12
SRGFD4-1000J	m4	80		1005.31	40	45	41	18	52.65	180	6	M12
SRGFD5-500J	m5	32	RD	502.65	50	50	45	20	31.33	220	3	M14
SRGFD5-1000J	m5	64		1005.31	50	50	45	20	62.65	220	5	M14
SRGFD6-500J	m6	26	RD	490.09	60	60	54	23	25.04	220	3	M16
SRGFD6-1000J	m6	53		999.03	60	60	54	23	59.51	220	5	M16



[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

PUS lubricated spur gear



Please see Page 476 for more details.

J Series

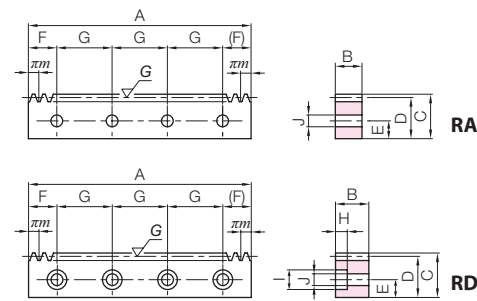

Recommended Mating Pinions



SSG Ground Spur Gears

Please see Page 58 for more details.




SSGS Ground Spur Gears



Please see Page 56 for more details.

* Module 10 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.


Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	4.5	862	514	87.9	52.4	0.04~0.19	0.26	SRGFK1-300J
—	—	—	—	—	—	—	—	0.43	SRGFK1-500J
6	10	6	2160	1360	220	138	0.04~0.19	1.07	SRGFD1.5-500J
—	—	—	—	—	—	—	—	2.14	SRGFD1.5-1000J
7	11	7	3830	2410	391	246	0.05~0.21	1.78	SRGFD2-500J
—	—	—	—	—	—	—	—	3.58	SRGFD2-1000J
8.6	14	9	5990	3770	611	384	0.05~0.21	2.64	SRGFD2.5-500J
—	—	—	—	—	—	—	—	5.31	SRGFD2.5-1000J
10.8	17.5	11	8620	5420	879	553	0.05~0.21	3.63	SRGFD3-500J
—	—	—	—	—	—	—	—	7.32	SRGFD3-1000J
13	20	14	15300	9640	1560	983	0.05~0.21	6.21	SRGFD4-500J
—	—	—	—	—	—	—	—	12.6	SRGFD4-1000J
15.2	23	16	24000	15100	2440	1540	0.05~0.22	8.56	SRGFD5-500J
—	—	—	—	—	—	—	—	17.2	SRGFD5-1000J
17.5	26	18	34500	21700	3520	2210	0.05~0.22	12.0	SRGFD6-500J
—	—	—	—	—	—	—	—	24.6	SRGFD6-1000J

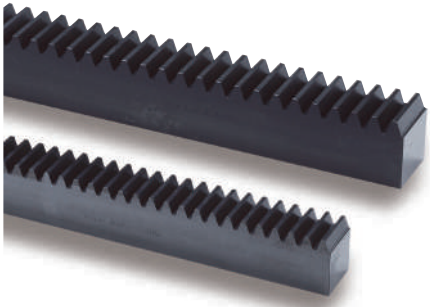

Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



RF



RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRF1.5-1000H	m1.5	212	RF	999.03	15	20	18.5	3140	1710	320	175
KRF2-1000H	m2	160		1005.31	20	25	23	5570	3090	568	315
KRF2.5-1000H	m2.5	128		1005.31	25	30	27.5	8710	4890	888	499
KRF3-1000H	m3	106		999.03	30	35	32	12500	7110	1280	725
KRF4-1000H	m4	80		1005.31	40	45	41	22300	12900	2270	1310
KRF5-1000H	m5	64		1005.31	50	50	45	34800	20400	3550	2080

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRFD1.5-1000HJ	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
● KRFD2-1000HJ	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
● KRFD2.5-1000HJ	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
● KRFD3-1000HJ	m3	106		999.03	30	35	32	14	49.51	180	6	M10
● KRFD4-1000HJ	m4	80		1005.31	40	45	41	18	52.65	180	6	M12
● KRFD5-1000HJ	m5	64		1005.31	50	50	45	20	62.65	220	5	M14

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.31	2.18	KRF1.5-1000H
0.07~0.34	3.63	KRF2-1000H
0.09~0.37	5.43	KRF2.5-1000H
0.10~0.41	7.53	KRF3-1000H
0.14~0.48	12.9	KRF4-1000H
0.16~0.53	17.8	KRF5-1000H

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3140	1710	320	175	0.05~0.31	2.14	● KRFD1.5-1000HJ
7	11	7	5570	3090	568	315	0.07~0.34	3.58	● KRFD2-1000HJ
8.6	14	9	8710	4890	888	499	0.09~0.37	5.31	● KRFD2.5-1000HJ
10.8	17.5	11	12500	7110	1280	725	0.10~0.41	7.32	● KRFD3-1000HJ
13	20	14	22300	12900	2270	1310	0.14~0.48	12.6	● KRFD4-1000HJ
15.2	23	16	34800	20400	3550	2080	0.16~0.53	17.2	● KRFD5-1000HJ


Recommended Mating Pinions




KS-  Hardened Spur Gears

Please see Page 100 for more details.




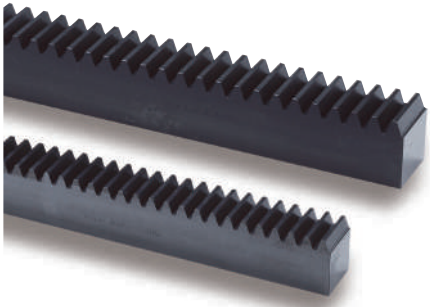

Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

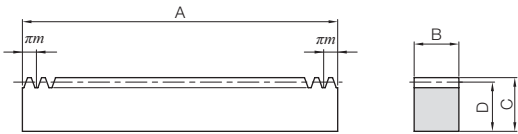

RF



RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SRF1.5-1000H	m1.5	212	RF	999.03	15	20	18.5	1960	1110	200	113
SRF2-1000H	m2	160		1005.31	20	25	23	3480	2000	355	204
SRF2.5-1000H	m2.5	128		1005.31	25	30	27.5	5440	3160	555	322
SRF3-1000H	m3	106		999.03	30	35	32	7840	4590	799	468
SRF4-1000H	m4	80		1005.31	40	45	41	13900	8310	1420	847
SRF5-1000H	m5	64		1005.31	50	50	45	21800	13200	2220	1340
SRF6-1000H	m6	53		999.03	60	60	54	31400	19200	3200	1960

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.29	2.18	SRF1.5-1000H
0.07~0.32	3.63	SRF2-1000H
0.09~0.35	5.43	SRF2.5-1000H
0.10~0.39	7.53	SRF3-1000H
0.14~0.46	12.9	SRF4-1000H
0.16~0.51	17.8	SRF5-1000H
0.18~0.58	25.4	SRF6-1000H

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SRFD1.5-1000HJ	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
SRFD2-1000HJ	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
SRFD2.5-1000HJ	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
SRFD3-1000HJ	m3	106		999.03	30	35	32	14	49.51	180	6	M10
SRFD4-1000HJ	m4	80		1005.31	40	45	41	18	52.65	180	6	M12
SRFD5-1000HJ	m5	64		1005.31	50	50	45	20	62.65	220	5	M14
SRFD6-1000HJ	m6	53		999.03	60	60	54	23	59.51	220	5	M16

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	1960	1110	200	113	0.05~0.29	2.14	SRFD1.5-1000HJ
7	11	7	3480	2000	355	204	0.07~0.32	3.58	SRFD2-1000HJ
8.6	14	9	5440	3160	555	322	0.09~0.35	5.31	SRFD2.5-1000HJ
10.8	17.5	11	7840	4590	799	468	0.10~0.39	7.32	SRFD3-1000HJ
13	20	14	13900	8310	1420	847	0.14~0.46	12.6	SRFD4-1000HJ
15.2	23	16	21800	13200	2220	1340	0.16~0.51	17.2	SRFD5-1000HJ
17.5	26	18	31400	19200	3200	1960	0.18~0.58	24.6	SRFD6-1000HJ


Recommended Mating Pinions



SS- Hardened Spur Gears


Please see Page 106 for more details.



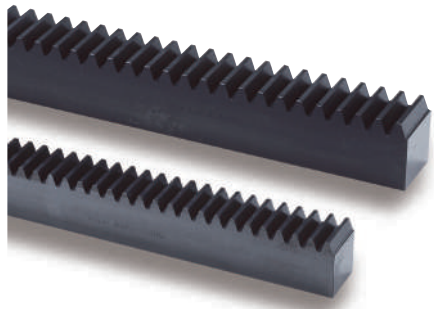


Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth laser hardened
Tooth hardness	55 to 65HRC
Surface treatment	Black oxide coating

* The precision grade of these products is equivalent to the value shown in the table.

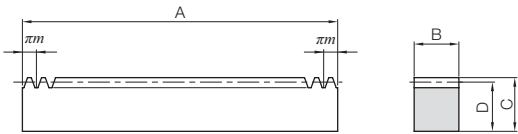

RF

J Series

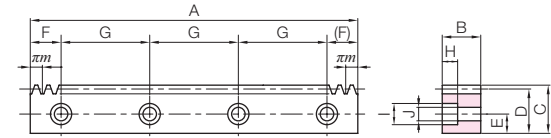

RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability			
SRF1.5-1000HL SRF1.5-1500HL SRF1.5-2000HL	m1.5	212 320 435	RF	999.03 1507.96 2049.88	15	20	18.5	2160	961	220	98.0	0.09~0.25	2.18 3.28 4.47	
SRF2-1000HL SRF2-1500HL SRF2-2000HL		m2		160 240 326	1005.31 1507.96 2048.31	20	25	23	3830	1730	391	177	0.11~0.28	3.63 5.45 7.40
SRF2.5-1000HL SRF2.5-1500HL SRF2.5-2000HL				m2.5	128 192 261	1005.31 1507.96 2049.88	25	30	27.5	5990	2740	611	280	0.13~0.31
SRF3-1000HL SRF3-1500HL SRF3-2000HL	m3				106 160 217	999.03 1507.96 2045.17	30	35	32	8620	3990	879	407	0.14~0.35
SRF4-1000HL SRF4-1500HL SRF4-2000HL		m4			80 120 163	1005.31 1507.96 2048.31	40	45	41	15300	7220	1560	736	0.18~0.42
SRF5-1000HL SRF5-1500HL SRF5-2000HL				m5	64 96 130	1005.31 1507.96 2042.04	50	50	45	24000	11400	2440	1170	0.20~0.47
SRF6-1000HL SRF6-1500HL SRF6-2000HL	m6				53 80 108	999.03 1507.96 2035.75	60	60	54	34500	16700	3520	1700	0.22~0.54

* Total length change just 1/12 compared to induction hardening! These hardened racks have minimal deformation due to heat treatment.

Laser hardened total length change

With induction hardening

Total length change 0.233 mm



With laser hardening

Total length change 0.019 mm



* This is a measurement of the total length change (cumulative pitch) when induction hardening and laser hardening are applied to SRF3-1000.


Recommended Mating Pinions



SS- Hardened Spur Gears
Please see Page 106 for more details.


Catalog Number ● : J Series (Available-on-request)	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions					
				A	B	C	D	E	F	G	No. of holes	Screw size	
●SRFD1.5-1000HLJ ●SRFD1.5-1500HLJ ●SRFD1.5-2000HLJ	m1.5	212 320 435	RD	999.03 1507.96 2049.88	15	20	18.5	8	49.51 33.98 34.94	180 180 180	6 9 12	M5	
●SRFD2-1000HLJ ●SRFD2-1500HLJ ●SRFD2-2000HLJ		m2		160 240 326	1005.31 1507.96 2048.31	20	25	23	10	52.65 33.98 34.15	180 180 180	6 9 12	M6
●SRFD2.5-1000HLJ ●SRFD2.5-1500HLJ ●SRFD2.5-2000HLJ				m2.5	128 192 261	1005.31 1507.96 2049.88	25	30	27.5	12	52.65 33.98 34.94	180 180 180	6 9 12
●SRFD3-1000HLJ ●SRFD3-1500HLJ ●SRFD3-2000HLJ	m3				106 160 217	999.03 1507.96 2045.17	30	35	32	14	49.51 33.98 32.58	180 180 180	6 9 12
●SRFD4-1000HLJ ●SRFD4-1500HLJ ●SRFD4-2000HLJ		m4			80 120 163	1005.31 1507.96 2048.31	40	45	41	18	52.65 33.98 34.15	180 180 180	6 9 12
●SRFD5-1000HLJ ●SRFD5-1500HLJ ●SRFD5-2000HLJ				m5	64 96 130	1005.31 1507.96 2042.04	50	50	45	20	62.65 93.98 31.02	220 220 220	5 7 10
●SRFD6-1000HLJ ●SRFD6-1500HLJ ●SRFD6-2000HLJ	m6				53 80 108	999.03 1507.96 2035.75	60	60	54	23	59.51 93.98 27.88	220 220 220	5 7 10

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number ● : J Series (Available-on-request)
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2160	961	220	98.0	0.09~0.25	2.14 3.23 4.40	SRFD1.5-1000HLJ SRFD1.5-1500HLJ SRFD1.5-2000HLJ
7	11	7	3830	1730	391	177	0.11~0.28	3.58 5.36 7.29	SRFD2-1000HLJ SRFD2-1500HLJ SRFD2-2000HLJ
8.6	14	9	5990	2740	611	280	0.13~0.31	5.31 7.97 10.8	SRFD2.5-1000HLJ SRFD2.5-1500HLJ SRFD2.5-2000HLJ
10.8	17.5	11	8620	3990	879	407	0.14~0.35	7.32 11.1 15.0	SRFD3-1000HLJ SRFD3-1500HLJ SRFD3-2000HLJ
13	20	14	15300	7220	1560	736	0.18~0.42	12.6 18.8 25.6	SRFD4-1000HLJ SRFD4-1500HLJ SRFD4-2000HLJ
15.2	23	16	24000	11400	2440	1170	0.20~0.47	17.2 25.9 35.0	SRFD5-1000HLJ SRFD5-1500HLJ SRFD5-2000HLJ
17.5	26	18	34500	16700	3520	1700	0.22~0.54	24.6 37.2 50.2	SRFD6-1000HLJ SRFD6-1500HLJ SRFD6-2000HLJ

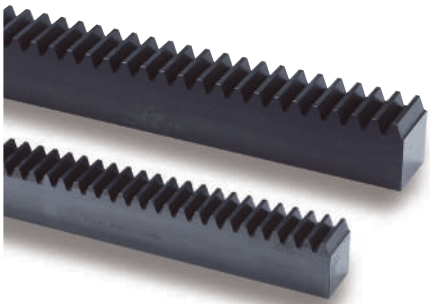

Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating


* The precision grade of J Series products is equivalent to the value shown in the table.

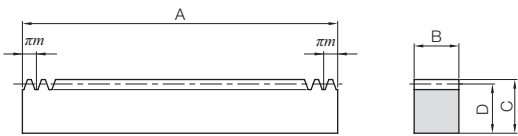


RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRF1.5-500 KRF1.5-1000	m1.5	106	RF	499.51	15	20	18.5	3450	953	352	97.2
KRF2-500 KRF2-1000		212		999.03							
KRF2.5-500 KRF2.5-1000	m2	80		502.65	20	25	23	6130	1760	625	179
KRF3-500 KRF3-1000		160		1005.31							
KRF4-500 KRF4-1000	m2.5	64		502.65	25	30	27.5	9580	2810	977	287
KRF5-500 KRF5-1000		128		1005.31							
KRF6-500 KRF6-1000	m3	53		499.51	30	35	32	13800	4120	1410	421
KRF7-500 KRF7-1000		106		999.03							
KRF8-500 KRF8-1000	m4	40		502.65	40	45	41	24500	7530	2500	768
KRF9-500 KRF9-1000		80		1005.31							
KRF10-500 KRF10-1000	m5	32		502.65	50	50	45	38300	12000	3910	1220
KRF11-500 KRF11-1000		64		1005.31							

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRFD1.5-500J ● KRFD1.5-1000J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
● KRFD2-500J ● KRFD2-1000J		212		999.03								
● KRFD2.5-500J ● KRFD2.5-1000J	m2	80		502.65	20	25	23	10	26.33	150	4	M6
● KRFD3-500J ● KRFD3-1000J		160		1005.31								
● KRFD4-500J ● KRFD4-1000J	m2.5	64		502.65	25	30	27.5	12	26.33	150	4	M8
● KRFD5-500J ● KRFD5-1000J		128		1005.31								
● KRFD6-500J ● KRFD6-1000J	m3	53		499.51	30	35	32	14	24.76	150	4	M10
● KRFD7-500J ● KRFD7-1000J		106		999.03								
● KRFD8-500J ● KRFD8-1000J	m4	40		502.65	40	45	41	18	26.33	150	4	M12
● KRFD9-500J ● KRFD9-1000J		80		1005.31								
● KRFD10-500J ● KRFD10-1000J	m5	32		502.65	50	50	45	20	31.33	150	3	M14
● KRFD11-500J ● KRFD11-1000J		64		1005.31								



RD



Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	1.09 2.18	KRF1.5-500 KRF1.5-1000
0.11~0.30	1.82 3.63	KRF2-500 KRF2-1000
0.13~0.33	2.71 5.43	KRF2.5-500 KRF2.5-1000
0.14~0.37	3.76 7.53	KRF3-500 KRF3-1000
0.18~0.44	6.47 12.9	KRF4-500 KRF4-1000
0.20~0.49	8.88 17.8	KRF5-500 KRF5-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3450	953	352	97.2	0.09~0.27	1.07 2.14	● KRFD1.5-500J ● KRFD1.5-1000J
7	11	7	6130	1760	625	179	0.11~0.30	1.78 3.58	● KRFD2-500J ● KRFD2-1000J
8.6	14	9	9580	2810	977	287	0.13~0.33	2.64 5.31	● KRFD2.5-500J ● KRFD2.5-1000J
10.8	17.5	11	13800	4120	1410	421	0.14~0.37	3.63 7.32	● KRFD3-500J ● KRFD3-1000J
13	20	14	24500	7530	2500	768	0.18~0.44	6.21 12.6	● KRFD4-500J ● KRFD4-1000J
15.2	23	16	38300	12000	3910	1220	0.20~0.49	8.88 17.2	● KRFD5-500J ● KRFD5-1000J


Recommended Mating Pinions



KS Thermal Refined Spur Gears


Please see Page 100 for more details.



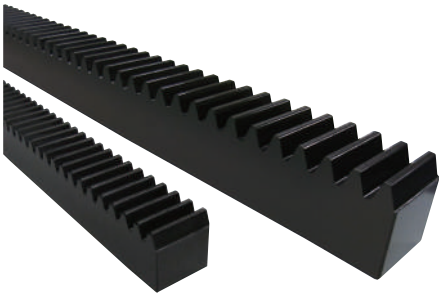

Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.




RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SRAF1.5-1000	m1.5	212	RF	999.03	15	15	13.5	2160	421	220	42.9
SRAF2-1000	m2	160		1005.31	20	20	18	3830	775	391	79.0
SRAF2.5-1000	m2.5	128		1005.31	25	25	22.5	5990	1240	611	127
SRAF3-1000	m3	106		999.03	30	30	27	8620	1820	879	186
SRAF4-1000	m4	80		1005.31	40	40	36	15300	3330	1560	339
SRAF1.5-2000	m1.5	435		2049.88	17	17	15.5	2443	421	249	43
SRAF2-2000	m2	326		2048.31	20	20	18	3833	775	391	79
SRAF2.5-2000	m2.5	261		2049.88	25	25	22.5	5989	1241	611	127
SRAF3-2000	m3	217		2045.17	30	30	27	8624	1821	879	186

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● SRAFK1.5-1000J	m1.5	212	RA	999.03	15	15	13.5	5	49.51	180	6	M5
● SRAFD2-1000J	m2	160	RD	1005.31	20	20	18	7	52.65			M6
● SRAFD2.5-1000J	m2.5	128	RD	1005.31	25	25	22.5	9	52.65			M8
● SRAFD3-1000J	m3	106	RD	999.03	30	30	27	11	49.51			M10
● SRAFD4-1000J	m4	80	RD	1005.31	40	40	36	15	52.65			M12

J Series

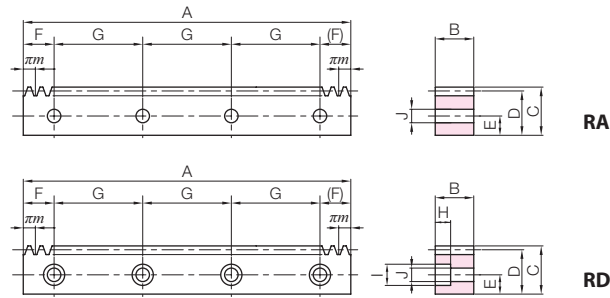

RA

RD

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.25	1.59	SRAF1.5-1000
0.11~0.28	2.84	SRAF2-1000
0.13~0.31	4.44	SRAF2.5-1000
0.14~0.35	6.35	SRAF3-1000
0.18~0.42	11.4	SRAF4-1000
0.09~0.25	4.24	SRAF1.5-2000
0.11~0.28	5.79	SRAF2-2000
0.13~0.31	9.05	SRAF2.5-2000
0.14~0.35	13.0	SRAF3-2000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	6	2160	421	220	42.9	0.09~0.25	1.57	● SRAFK1.5-1000J
7	11	7	3830	775	391	79.0	0.11~0.28	2.79	● SRAFD2-1000J
8.6	14	9	5990	1240	611	127	0.13~0.31	4.33	● SRAFD2.5-1000J
10.8	17.5	11	8620	1820	879	186	0.14~0.35	6.14	● SRAFD3-1000J
13	20	14	15300	3330	1560	339	0.18~0.42	11.0	● SRAFD4-1000J

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.






Racks

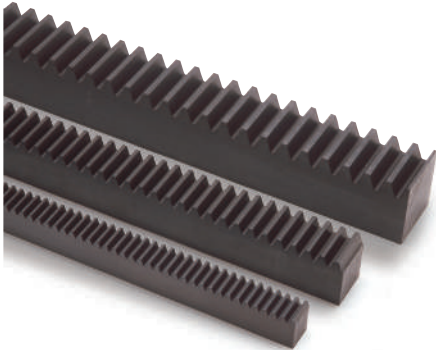

Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

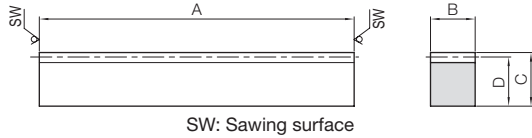

R1

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SR0.5-100	m0.5	62	R1	101	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.046
SR0.8-100	m0.8	38		101	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.073
SR1-100	m1	29		98	10	12	11	958	177	97.7	18.0	0.04~0.21	0.085
SR1-300		94		303									
SR1-500		159		505									
SR1.5-100	m1.5	20		101	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.22
SR1.5-300		62		303									
SR1.5-500		105		505									
SR2-100	m2	14		98	20	25	23	3830	775	391	79.0	0.11~0.28	0.35
SR2-300		46		303									
SR2-500		79		505									
SR2.5-100	m2.5	11		100	25	30	27.5	5990	1240	611	127	0.13~0.31	0.54
SR2.5-300		37		303									
SR2.5-500		63		505									
SR3-100	m3	9		101	30	35	32	8620	1820	879	186	0.14~0.35	0.76
SR3-300		30		303									
SR3-500		52		505									
SR4-100	m4	6		98	40	45	41	15300	3330	1560	339	0.18~0.42	1.26
SR4-500		39		505									
SR5-110	m5	5		108	50	50	45	24000	5300	2440	540	0.20~0.47	1.91
SR5-500		31		505									
SR6-110	m6	4		111	60	60	54	34500	7740	3520	789	0.22~0.54	2.82
SR6-500		25		505									
SR8-130	m8	3		123	75	75	67	44200	10400	4510	1060	0.28~0.63	4.85
SR10-160	m10	3		155	90	80	70	66300	16100	6770	1640	0.33~0.70	7.67

Recommended Mating Pinions




SS Spur Gears


Please see Page 104 for more details.



Steel Racks with Machined Ends

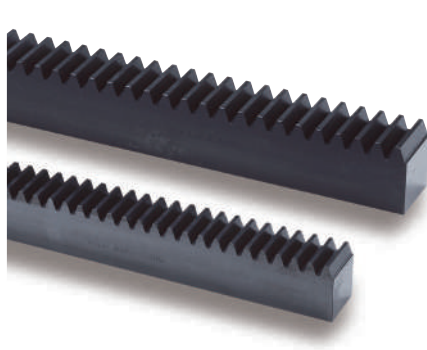

Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

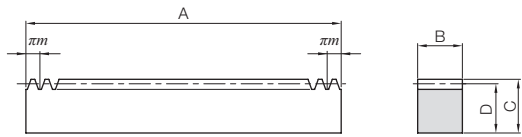

RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRF0.5-300	m0.5	191	RF	300.02	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.14
SRF0.8-300	m0.8	119		299.08	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.22
SRF1-300	m1	96		301.59	10	12	11	958	177	97.7	18.0	0.04~0.21	0.26
SRF1-500		159		499.51									
SRF1-1000		318		999.03									
SRF1.5-300	m1.5	64		301.59	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.66
SRF1.5-500		106		499.51									
SRF1.5-1000		212		999.03									
SRF1.5-1500		320		1507.96									
SRF1.5-2000		435		2049.88									
SRF2-300	m2	48		301.59	20	25	23	3830	775	391	79.0	0.11~0.28	1.09
SRF2-500		80		502.65									
SRF2-1000		160		1005.31									
SRF2-1500		240		1507.96									
SRF2-2000		326		2048.31									
SRF2.5-300	m2.5	38		298.45	25	30	27.5	5990	1240	611	127	0.13~0.31	1.61
SRF2.5-500		64		502.65									
SRF2.5-1000		128		1005.31									
SRF2.5-1500		192		1507.96									
SRF2.5-2000		261		2049.88									
SRF3-300	m3	32		301.59	30	35	32	8620	1820	879	186	0.14~0.35	2.27
SRF3-500		53		499.51									
SRF3-1000		106		999.03									
SRF3-1500		160		1507.96									
SRF3-2000		217		2045.17									
SRF4-500	m4	40		502.65	40	45	41	15300	3330	1560	339	0.18~0.42	6.47
SRF4-1000		80		1005.31									
SRF4-1500		120		1507.96									
SRF4-2000		163		2048.31									
SRF5-500	m5	32		502.65	50	50	45	24000	5300	2440	540	0.20~0.47	8.88
SRF5-1000		64		1005.31									
SRF5-1500		96		1507.96									
SRF5-2000		130		2042.04									
SRF6-500	m6	26		490.09	60	60	54	34500	7740	3520	789	0.22~0.54	12.5
SRF6-1000		53		999.03									
SRF6-1500		80		1507.96									
SRF6-2000		108		2035.75									
SRF8-500	m8	20		502.66	75	75	67	44200	10400	4510	1060	0.28~0.63	19.8
SRF8-1000		40		1005.31									
SRF10-1000	m10	32		1005.31	90	80	70	66300	16100	6770	1640	0.33~0.70	49.7






Steel Racks with Bolt Holes



Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating


* The precision grade of J Series products is equivalent to the value shown in the table.

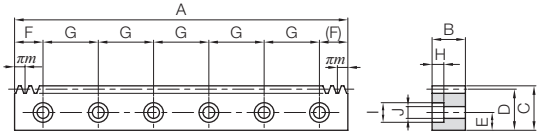

RD

Catalog Number ● : J Series (Available-on-request)	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
●SRFK0.5-300J	m0.5	191	RA	300.02	5	12	11.5	5.5	15.01	90	4	M3
●SRFK0.8-300J	m0.8	119		299.08	8	12.3	11.5	5.5	14.54	90	4	M4
●SRFK1-300J	m1	96		301.59	10	12	11	5	20.80	130	3	M4
●SRFK1-500J		159		499.51					24.76	150	4	
●SRFD1.5-300J	m1.5	64	RD	301.59	15	20	18.5	8	20.80	130	3	M5
●SRFD1.5-500J		106		499.51					24.76	150	4	
SRFD1.5-1000		212		999.03					49.51	180	6	
SRFD1.5-1500		320		1507.96					33.98	180	9	
SRFD1.5-2000		435		2049.88					34.94	180	12	
●SRFD2-300J	m2	48		301.59	20	25	23	10	20.80	130	3	M6
●SRFD2-500J		80		502.65					26.33	150	4	
SRFD2-1000		160		1005.31					52.65	180	6	
SRFD2-1500		240		1507.96					33.98	180	9	
SRFD2-2000		326		2048.31					34.15	180	12	
●SRFD2.5-300J	m2.5	38		298.45	25	30	27.5	12	19.23	130	3	M8
●SRFD2.5-500J		64		502.65					26.33	150	4	
SRFD2.5-1000		128		1005.31					52.65	180	6	
SRFD2.5-1500		192		1507.96					33.98	180	9	
SRFD2.5-2000		261		2049.88					34.94	180	12	
●SRFD3-300J	m3	32		301.59	30	35	32	14	20.80	130	3	M10
●SRFD3-500J		53		499.51					24.76	150	4	
SRFD3-1000		106		999.03					49.51	180	6	
SRFD3-1500		160		1507.96					33.98	180	9	
SRFD3-2000		217		2045.17					32.58	180	12	
●SRFD4-500J	m4	40		502.65	40	45	41	18	26.33	150	4	M12
SRFD4-1000		80		1005.31					52.65	180	6	
SRFD4-1500		120		1507.96					33.98	180	9	
SRFD4-2000		163		2048.31					34.15	180	12	
●SRFD5-500J	m5	32		502.65	50	50	45	20	31.33	220	3	M14
SRFD5-1000		64		1005.31					62.65	220	5	
SRFD5-1500		96		1507.96					93.98	220	7	
SRFD5-2000		130		2042.04					31.02	220	10	
●SRFD6-500J	m6	26		490.09	60	60	54	23	25.04	220	3	M16
SRFD6-1000		53		999.03					59.51	220	5	
SRFD6-1500		80		1507.96					93.98	220	7	
SRFD6-2000		108		2035.75					27.88	220	10	

J Series

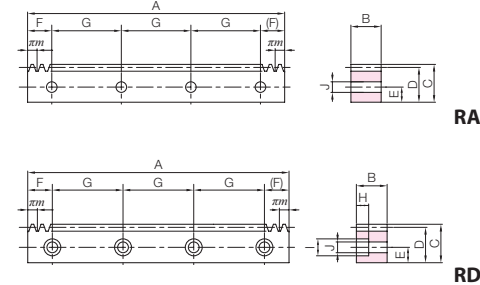

RD



Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number ● : J Series (Available-on-request)
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	3.4	240	39.6	24.4	4.04	0.00~0.13	0.13	●SRFK0.5-300J
—	—	4.5	613	108	62.5	11.0	0.00~0.14	0.21	●SRFK0.8-300J
—	—	4.5	958	177	97.7	18.0	0.04~0.21	0.26 0.43	●SRFK1-300J ●SRFK1-500J
6	10	6	2160	421	220	42.9	0.09~0.25	0.64 1.07 2.14 3.23 4.40	●SRFD1.5-300J ●SRFD1.5-500J SRFD1.5-1000 SRFD1.5-1500 SRFD1.5-2000
7	11	7	3830	775	391	79.0	0.11~0.28	1.06 1.78 3.58 5.36 7.29	●SRFD2-300J ●SRFD2-500J SRFD2-1000 SRFD2-1500 SRFD2-2000
8.6	14	9	5990	1240	611	127	0.13~0.31	1.55 2.64 5.31 7.97 10.8	●SRFD2.5-300J ●SRFD2.5-500J SRFD2.5-1000 SRFD2.5-1500 SRFD2.5-2000
10.8	17.5	11	8620	1820	879	186	0.14~0.35	2.17 3.63 7.32 11.1 15.0	●SRFD3-300J ●SRFD3-500J SRFD3-1000 SRFD3-1500 SRFD3-2000
13	20	14	15300	3330	1560	339	0.18~0.42	6.21 12.6 18.8 25.6	●SRFD4-500J SRFD4-1000 SRFD4-1500 SRFD4-2000
15.2	23	16	24000	5300	2440	540	0.20~0.47	8.56 17.2 25.9 35.0	●SRFD5-500J SRFD5-1000 SRFD5-1500 SRFD5-2000
17.5	26	18	34500	7740	3520	789	0.22~0.54	12.0 24.6 37.2 50.2	●SRFD6-500J SRFD6-1000 SRFD6-1500 SRFD6-2000

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.





Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS304
Heat treatment	Solution treated
Tooth hardness	(less than 187HB)


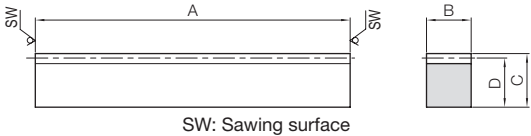


R1



Catalog Number	Module	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SUR1-500	m1	159	R1	505	10	12	11	457	99.4	46.6	10.1
SUR1.5-500	m1.5	105			15	20	18.5	1030	237	105	24.2
SUR2-500	m2	79			20	25	23	1830	436	187	44.5
SUR2.5-500	m2.5	63			25	30	27.5	2860	698	292	71.2
SUR3-500	m3	52			30	35	32	4120	1030	420	105
SUR4-500	m4	39			40	45	41	7320	1870	746	191

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SURF1.5-1000	m1.5	212	RF	999.03	15	20	18.5	1030	237	105	24.2
SURF2-1000	m2	160		1005.31	20	25	23	1830	436	187	44.5
SURF2.5-1000	m2.5	128		1005.31	25	30	27.5	2860	698	292	71.2
SURF3-1000	m3	106		999.03	30	35	32	4120	1030	420	105
SURF4-1000	m4	80		1005.31	40	45	41	7320	1870	746	191

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SURFD1.5-1000	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
SURFD2-1000	m2	160		1005.31	20	25	23	10	52.65			M6
SURFD2.5-1000	m2.5	128		1005.31	25	30	27.5	12	52.65			M8
SURFD3-1000	m3	106		999.03	30	35	32	14	49.51			M10
SURFD4-1000	m4	80		1005.31	40	45	41	18	52.65			M12



RF



RD

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.23	0.44	SUR1-500
0.09~0.27	1.11	SUR1.5-500
0.11~0.30	1.84	SUR2-500
0.13~0.33	2.75	SUR2.5-500
0.14~0.37	3.84	SUR3-500
0.18~0.44	6.57	SUR4-500

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	2.20	SURF1.5-1000
0.11~0.30	3.67	SURF2-1000
0.13~0.33	5.48	SURF2.5-1000
0.14~0.37	7.61	SURF3-1000
0.18~0.44	13.1	SURF4-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	1030	237	105	24.2	0.09~0.27	2.16	SURFD1.5-1000 SURFD2-1000 SURFD2.5-1000 SURFD3-1000 SURFD4-1000
7	11	7	1830	436	187	44.5	0.11~0.30	3.61	
8.6	14	9	2860	698	292	71.2	0.13~0.33	5.37	
10.8	17.5	11	4120	1030	420	105	0.14~0.37	7.40	
13	20	14	7320	1870	746	191	0.18~0.44	12.7	


Recommended Mating Pinions



SUS/SUSA Stainless Steel Spur Gears


Please see Page 154 for more details.



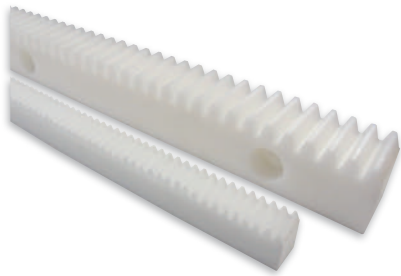

Specifications	
Precision grade	KHK R 001 Grade 5 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	Polyacetal
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade of J Series products is equivalent to the value shown in the table.

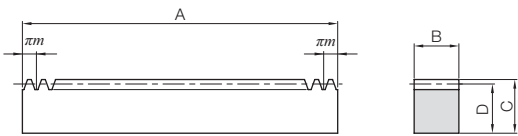


RF

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)	Allowable force (kgf)	Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
DRF1-500	m1	159	RF	499.51	10	12	11	80.7	8.23	0.15~0.36	0.077
DRF1.5-500	m1.5	106		499.51	15	20	18.5	182	18.5	0.18~0.39	0.20
DRF1.5-1000		212		999.03	15	20	18.5	182	18.5	0.18~0.39	0.39
DRF2-500	m2	80		502.65	20	25	23	323	32.9	0.21~0.42	0.33
DRF2-1000		160		1005.31	20	25	23	323	32.9	0.21~0.42	0.65
DRF2.5-500	m2.5	64		502.65	25	30	27.5	504	51.4	0.23~0.46	0.49
DRF2.5-1000		128		1005.31	25	30	27.5	504	51.4	0.23~0.46	0.98
DRF3-500	m3	53		499.51	30	35	32	726	74.1	0.28~0.52	0.68
DRF3-1000		106		999.03	30	35	32	726	74.1	0.28~0.52	1.35

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
DRFK1-500J	m1	159	RA	499.51	10	12	11	5	24.76	150	4	M4
DRFD1.5-500J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
DRFD1.5-1000J		212		999.03	15	20	18.5	8	49.51	180	6	M5
DRFD2-500J	m2	80		502.65	20	25	23	10	26.33	150	4	M6
DRFD2-1000J		160		1005.31	20	25	23	10	52.65	180	6	M6
DRFD2.5-500J	m2.5	64		502.65	25	30	27.5	12	26.33	150	4	M8
DRFD2.5-1000J		128		1005.31	25	30	27.5	12	52.65	180	6	M8
DRFD3-500J	m3	53		499.51	30	35	32	14	24.76	150	4	M10
DRFD3-1000J		106		999.03	30	35	32	14	49.51	180	6	M10

J Series

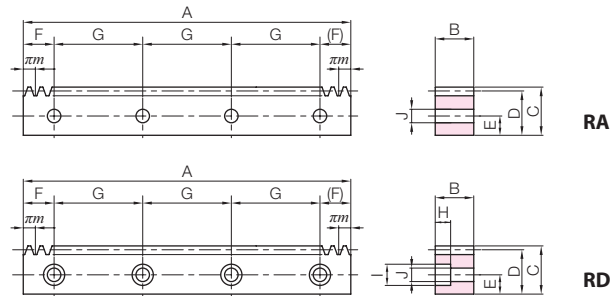

Counterbore dimensions			Allowable force (N)	Allowable force (kgf)	Backlash (mm)	Weight (kg)	Catalog Number
H	I	J					
—	—	4.5	80.7	8.23	0.15~0.36	0.077	DRFK1-500J
6	10	6	182	18.5	0.18~0.39	0.19 0.38	DRFD1.5-500J DRFD1.5-1000J
7	11	7	323	32.9	0.21~0.42	0.32 0.64	DRFD2-500J DRFD2-1000J
8.6	14	9	504	51.4	0.23~0.46	0.47 0.95	DRFD2.5-500J DRFD2.5-1000J
10.8	17.5	11	726	74.1	0.28~0.52	0.65 1.31	DRFD3-500J DRFD3-1000J


Recommended Mating Pinions



SUS/SUSA Stainless Steel Spur Gears


Please see Page 154 for more details.



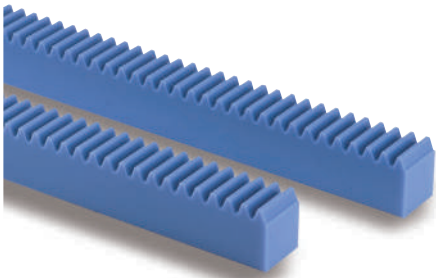

Specifications	
Precision grade	KHK R 001 Grade 5 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)


* The precision grade is equivalent to the value shown in the table.

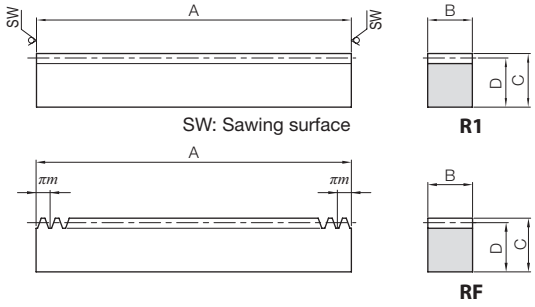

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
PR1-500	m1	159	R1	505	10	12	11	92.8	9.46	0.18~0.39	0.064
PR1.5-500	m1.5	105			15	20	18.5	209	21.3	0.21~0.42	0.16
PR2-500	m2	79			20	25	23	371	37.9	0.24~0.45	0.27
PR2.5-500	m2.5	63			25	30	27.5	580	59.2	0.26~0.49	0.40
PR3-500	m3	52			30	35	32	835	85.2	0.32~0.56	0.56


Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
PRF1.5-1000	m1.5	212	RF	999.03	15	20	18.5	209	21.3	0.21~0.42	0.32
PRF2-1000	m2	160		1005.31	20	25	23	371	37.9	0.24~0.45	0.54
PRF2.5-1000	m2.5	128		1005.31	25	30	27.5	580	59.2	0.26~0.49	0.80
PRF3-1000	m3	106		999.03	30	35	32	835	85.2	0.32~0.56	1.11

Recommended Mating Pinions

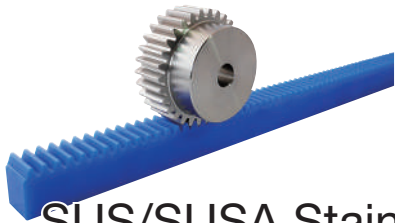


SUS/SUSA Stainless Steel Spur Gears

Please see Page 154 for more details.

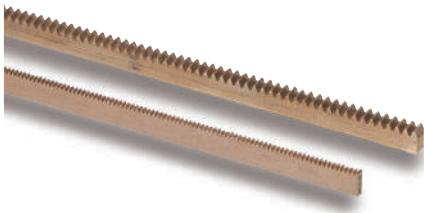

Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	Free cutting brass (C3604)
Heat Treatment	—
Tooth hardness	(80HV or more)

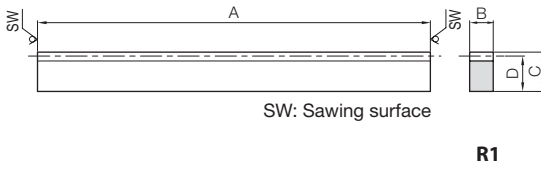

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
BSR0.5-300	m0.5	190	R1	303	3	9	8.5	28.7	—	2.93	—	0.00~0.13	0.066
BSR0.8-300	m0.8	118			4	10	9.2	61.3	—	6.25	—	0.00~0.14	0.095
BSR1-300	m1	94			6	10	9	115	—	11.7	—	0.04~0.21	0.14

Recommended Mating Pinions



BSS Spur Gears

Please see Page 186 for more details.






Round Racks



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

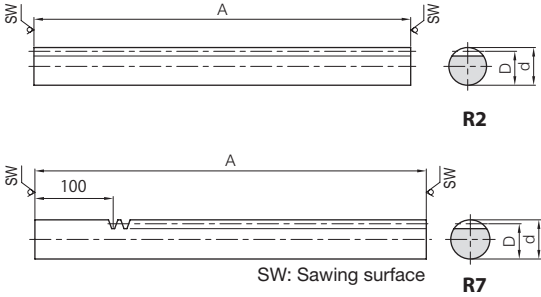

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Outside dia.	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	d _h	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRO1-500	m1	159	R2	505	10	9	800	121	81.6	12.3	0.04~0.21	0.29
SRO1.5-500	m1.5	105		505	15	13.5	1800	288	184	29.3	0.09~0.25	0.65
SRO2-500	m2	79		505	20	18	3200	530	326	54.0	0.11~0.28	1.16
SRO2-1000		159		1010								2.31
SRO2.5-500	m2.5	63		505	25	22.5	5000	848	510	86.5	0.13~0.31	1.81
SRO2.5-1000		127		1010								3.61
SRO3-500	m3	52		505	30	27	7200	1240	735	127	0.14~0.35	2.60
SRO3-1000		105		1010								5.20
SRO4-500	m4	39		505	40	36	12800	2270	1310	232	0.18~0.42	4.62
SRO4-1000		79		1010								9.24
SRO5-1000	m5	63		1010	50	45	20000	3620	2040	369	0.20~0.47	14.4


Catalog Number	Module	Effective number of teeth	Shape	Total Length	Outside dia.	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	d _h	D	Bending strength	Surface durability	Bending strength	Surface durability		
SROS1-500	m1	128	R7	505	10	9	800	121	81.6	12.3	0.04~0.21	0.29
SROS1.5-500	m1.5	85			15	13.5	1800	288	184	29.3	0.09~0.25	0.66
SROS2-500	m2	64			20	18	3200	530	326	54.0	0.11~0.28	1.17
SROS2.5-500	m2.5	51			25	22.5	5000	848	510	86.5	0.13~0.31	1.83
SROS3-500	m3	42			30	27	7200	1240	735	127	0.14~0.35	2.64



Stainless Steel Round Racks



Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

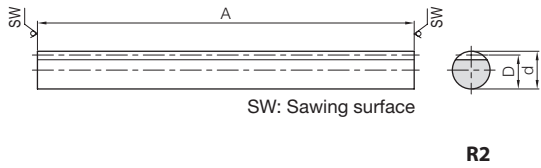

Catalog Number	Module	Effective number of teeth	Shape	Total Length	Outside dia.	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	d _h	D	Bending strength	Surface durability	Bending strength	Surface durability		
SURO1-500	m1	159	R2	505	10	9	382	67.9	39.0	6.93	0.04~0.23	0.29
SURO1.5-500	m1.5	105		505	15	13.5	859	162	87.6	16.5	0.09~0.27	0.66
SURO2-500	m2	79		505	20	18	1530	298	156	30.4	0.11~0.30	1.17
SURO2-1000		159		1010								2.33
SURO2.5-500	m2.5	63		505	25	22.5	2390	477	243	48.7	0.13~0.33	1.82
SURO2.5-1000		127		1010								3.65
SURO3-500	m3	52		505	30	27	3440	700	351	71.4	0.14~0.37	2.63
SURO3-1000		105		1010								5.25


Recommended Mating Pinions



SS Spur Gears

Please see Page 104 for more details.


Recommended Mating Pinions

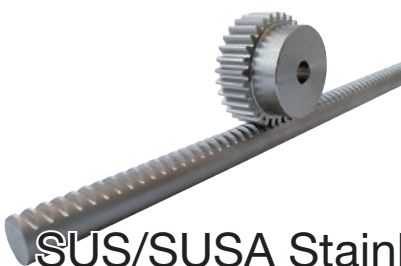

SUS/SUSA Stainless Steel Spur Gears


Please see Page 154 for more details.



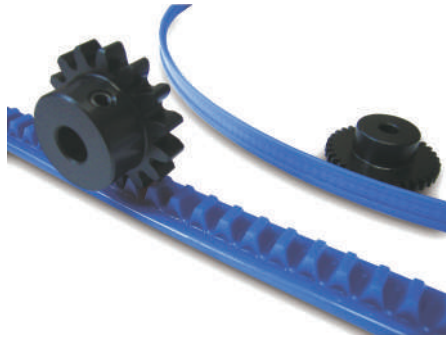

Specifications	
Precision grade	KHK R 001 grade 8
Gear teeth	Standard full depth
Pressure angle	20°
Material	Duracon (R) (M25-44) *
Heat treatment	—
Tooth hardness	(110 to 120HRR)


* "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

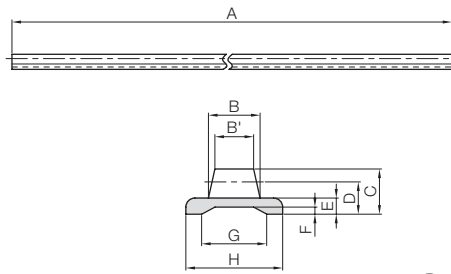


R4

Catalog Number	Module	Shape	Total Length	Face width	Face width	Height	Height to pitch line	Base thickness	Base groove depth	Base groove width	Base width
			A	B	B'	C	D	E	F	G	H
DR0.8-2000	m0.8	R4	2000	3.8	3	3.3	2.5	1.5	0.7	3.7	8
DR1-2000	m1			5	4	4.3	3.3	2	0.9	4.9	10
DR1.5-2000	m1.5			6.5	5	5.7	4.2	2.3	1	8	12
DR2-2000	m2			8	6	7	5	2.5	1.1	10.1	15

DR dedicated SRS Rack Clamps

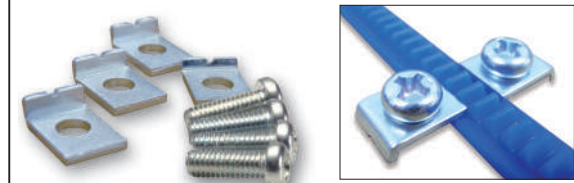

Installation image



T7

Material: SPCC trivalent chromate finish

Catalog Number	Shape	A	B	C	D	E	F	Weight (g)
SRS-1	T7	10.2	8	4.5	2.7	1.2	—	2.24
SRS-2		11.4		5.6	3.9	1.4		2.52

Dimensional tolerance of DR / molded item (unit: mm)

Grade	Rough grade
Dimensional classification	
3 or less	±0.20
4 to 6	±0.25
7 to 10	±0.30
11 to 18	±0.35
19 to 30	±0.40
Over 30	±0.50


SRS/ARL / Normal dimensional tolerance of bending and drawing (unit: mm)

Grade	Grade B
Dimensional classification	
6 or less	±0.30
7 to 30	±0.50
31 to 120	±0.80
120 to 400	±1.20
400 to 1000	±2.00
1000 to 2000	±3.00



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.



S1T

Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Socket head screw
				A _{H7}	B	C	D	E	F	G	Size J
SSDR0.8-35	m0.8	35	S1T	5	16	28	29.6	3	7	10	M4 3.5
SSDR1-30	m1	30		6	20	30	32	4	8	12	M4 4
SSDR1.5-20	m1.5	20		6	20	30	33	5	10	15	M4 5
SSDR2-15	m2	15		8	22	30	34	6	10	16	M5 5


List of Products for DR Molded Flexible Racks

Molded Flexible Racks	Rack Clamps	Slide Rails	Dedicated Pinions
DR0.8-2000	SRS-1	ARL-0.8	SSDR0.8-35
DR1-2000	SRS-1	ARL-1	SSDR1-30
DR1.5-2000	SRS-2	ARL-1.5	SSDR1.5-20
DR2-2000	SRS-2	ARL-2	SSDR2-15

Allowable force (N)	Allowable force (kgf)	Weight (kg)	Catalog Number
Bending strength	Bending strength		
112	11.4	0.036	DR0.8-2000
161	16.4	0.060	DR1-2000
161	16.5	0.085	DR1.5-2000
265	27.0	0.12	DR2-2000

* Molded flexible racks of 2 meters or longer are also available by request as custom-made products.
(Only the length can be changed, up to 50 m)

DR dedicated ARL Slide Rails



T6

Material: Aluminum (A6063S-T5) Overall length: 1,000 mm


Catalog Number	Shape	A	B	C	D	E	F	Weight (kg)
ARL-0.8	T6	10.3	4.4	4.7	2	1.7	8.3	0.081
ARL-1		12.3	5.6	5.2	2	2.2	10.3	0.096
ARL-1.5		14.3	7.2	5.5	2	2.5	12.3	0.11
ARL-2		17.3	8.8	6.2	2.5	2.7	15.3	0.15

Steel Spur Gears


Allowable torque (N-m)	Allowable torque (kgf-m)	Weight (g)	Catalog Number
Bending strength	Bending strength		
2.59	0.26	23.5	SSDR0.8-35
4.46	0.45	38.6	SSDR1-30
7.35	0.75	48.4	SSDR1.5-20
10.4	1.06	56.1	SSDR2-15

Applications for DR Molded Flexible Racks


As it is possible to fix the position of the pinion and bend the DR molded flexible racks into any shape, they can be used for special purposes.

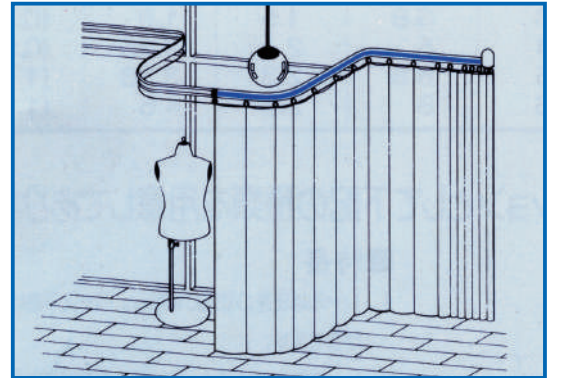


Electric curtain

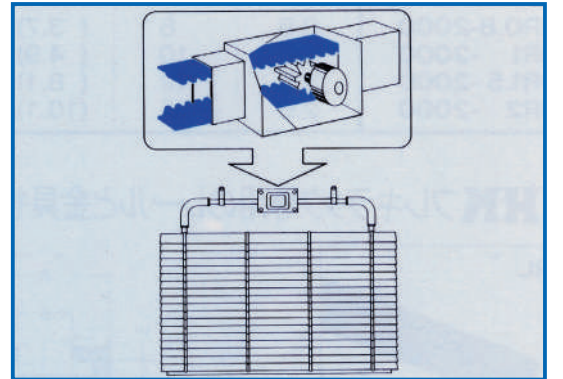

Electric blinds

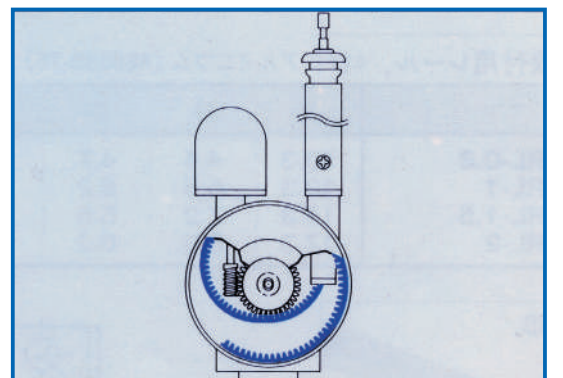

Electric antenna



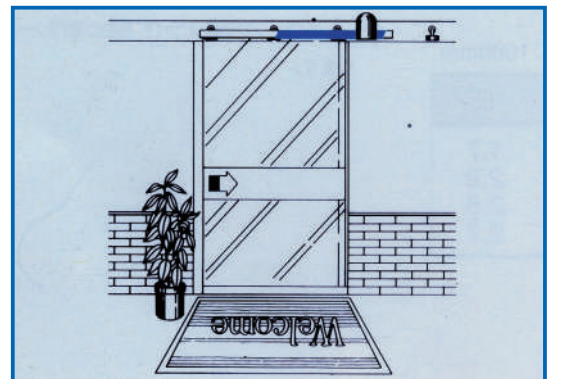


Automatic doors



Specifications	
Precision grade	KHK R 001 Grade 1 *
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Transverse pressure angle	20°
Helix angle	21°30'
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB

* The precision grade of J Series products is equivalent to the value shown in the table.

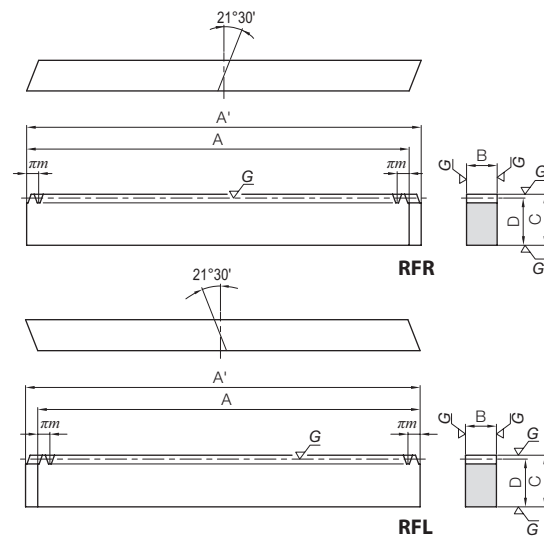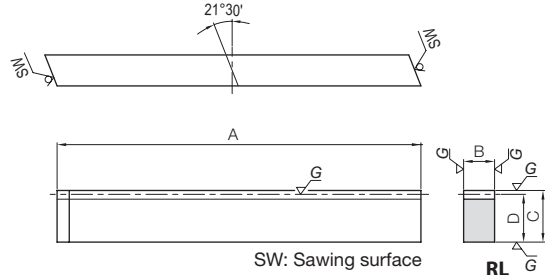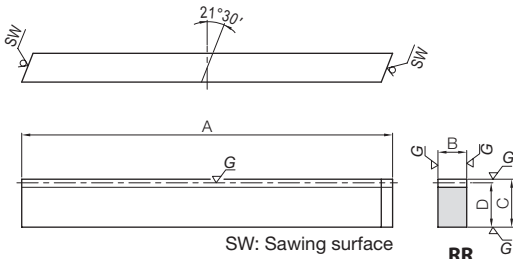

Catalog Number	Module	Effective number of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	B				Bending strength	Surface durability	Bending strength	Surface durability
KRHG1-100R KRHG1-100L	m1	28	R L	RR RL	98	8	15	14	1290	955	131	97.4	
KRHG1.5-100R KRHG1.5-100L	m1.5	19	R L	RR RL	101	12	20	18.5	2890	2380	295	243	
KRHG2-100R (Made to Order) KRHG2-100L (Made to Order)	m2	13	R L	RR RL	98	16	25	23	5140	4230	524	432	
KRHG2.5-100R (Made to Order) KRHG2.5-100L (Made to Order)	m2.5	10	R L	RR RL	100	20	30	27.5	8030	6610	819	674	
KRHG3-100R (Made to Order) KRHG3-100L (Made to Order)	m3	8	R L	RR RL	102	25	35	32	12000	9810	1230	1000	

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	A'				Bending strength	Surface durability	Bending strength	Surface durability
KRHGF1-500R KRHGF1-500L	m1	159	R L	RFR RFL	499.51	502.66	8	15	14	1290	955	131	97.4
KRHGF1.5-500R KRHGF1.5-500L	m1.5	106	R L	RFR RFL	499.51	504.23	12	20	18.5	2890	2380	295	243
KRHGF2-1000R KRHGF2-1000L	m2	160	R L	RFR RFL	1005.31	1011.61	16	25	23	5140	4230	524	432
KRHGF2.5-1000R KRHGF2.5-1000L	m2.5	128	R L	RFR RFL	1005.31	1013.19	20	30	27.5	8030	6610	819	674
KRHGF3-1000R KRHGF3-1000L	m3	106	R L	RFR RFL	999.03	1008.88	25	35	32	12000	9810	1230	1000

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Mounting hole dimensions			
					A	A'				E	F	G	No. of holes
● KRHGF1-500RJ ● KRHGF1-500LJ	m1	159	R L	RDR RDL	499.51	502.66	8	15	14	6	24.76	150	4
● KRHGF1.5-500RJ ● KRHGF1.5-500LJ	m1.5	106	R L	RDR RDL	499.51	504.23	12	20	18.5	8	24.76	150	4
● KRHGF2-1000RJ ● KRHGF2-1000LJ	m2	160	R L	RDR RDL	1005.31	1011.61	16	25	23	10	52.65	180	6
● KRHGF2.5-1000RJ ● KRHGF2.5-1000LJ	m2.5	128	R L	RDR RDL	1005.31	1013.19	20	30	27.5	12	52.65	180	6
● KRHGF3-1000RJ ● KRHGF3-1000LJ	m3	106	R L	RDR RDL	999.03	1008.88	25	35	32	14	49.51	180	6

[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.15	0.086	KRHG1-100R KRHG1-100L
0.05~0.15	0.18	KRHG1.5-100R KRHG1.5-100L
0.06~0.17	0.28	KRHG2-100R (Made to Order) KRHG2-100L (Made to Order)
0.06~0.17	0.43	KRHG2.5-100R (Made to Order) KRHG2.5-100L (Made to Order)
0.06~0.17	0.64	KRHG3-100R (Made to Order) KRHG3-100L (Made to Order)

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.15	0.44	KRHGF1-500R KRHGF1-500L
0.05~0.15	0.87	KRHGF1.5-500R KRHGF1.5-500L
0.06~0.17	2.90	KRHGF2-1000R KRHGF2-1000L
0.06~0.17	4.34	KRHGF2.5-1000R KRHGF2.5-1000L
0.06~0.17	6.27	KRHGF3-1000R KRHGF3-1000L


Counterbore dimensions				Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
Screw size	H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
M4	4.4	8	4.5	1290	955	131	97.4	0.05~0.15	0.43	● KRHGF1-500RJ ● KRHGF1-500LJ
M5	6	10	6	2890	2380	295	243	0.05~0.15	0.85	● KRHGF1.5-500RJ ● KRHGF1.5-500LJ
M6	7	11	7	5140	4230	524	432	0.06~0.17	2.86	● KRHGF2-1000RJ ● KRHGF2-1000LJ
M8	8.6	14	9	8030	6610	819	674	0.06~0.17	4.24	● KRHGF2.5-1000RJ ● KRHGF2.5-1000LJ
M10	10.8	17.5	11	12000	9810	1230	1000	0.06~0.17	6.09	● KRHGF3-1000RJ ● KRHGF3-1000LJ

Recommended Mating Pinions




KHG Ground Helical Gears

Please see Page 194 for more details.

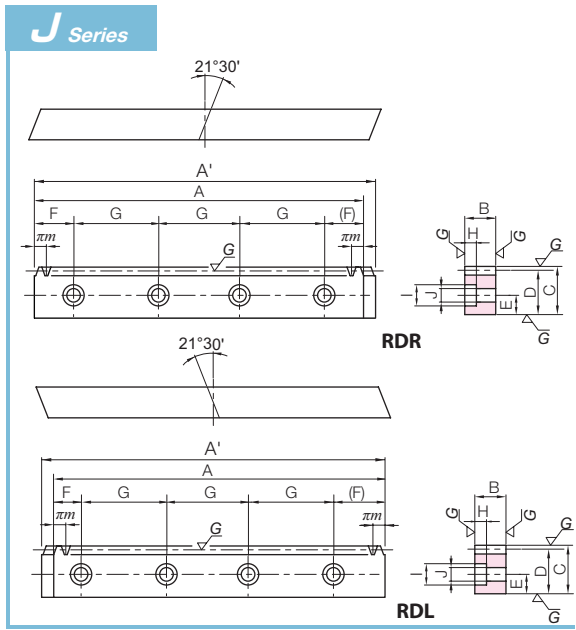




Specifications	
Precision grade	KHK R 001 grade 5
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	15°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

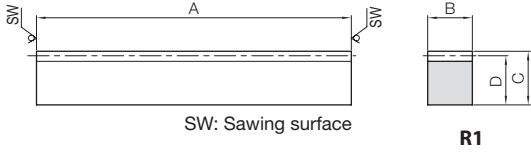

Catalog Number	Module	Effective number of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
					A	B				Bending strength	Surface durability	Bending strength	Surface durability		
SRH2-100R SRH2-100L	m2	12	R L	RR RL	95	25	25	23		4710	1570	481	160	0.12~0.31	0.43
SRH2-500R SRH2-500L		75	R L	R1	505										
SRH2-1000R SRH2-1000L		152	R L		1010										
SRH3-100R SRH3-100L	m3	7	R L	RR RL	95	35	35	32		9910	3520	1010	359	0.15~0.38	0.84
SRH3-500R SRH3-500L		49	R L	R1	505										
SRH3-1000R SRH3-1000L		101	R L		1010										

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	A'				Bending strength	Surface durability	Bending strength	Surface durability
SRHF2-1000R SRHF2-1000L	m2	153	R L	RFR RFL	995.24	1001.94	25	25	23	4710	1570	481	160
SRHF3-1000R SRHF3-1000L	m3	102	R L	RFR RFL	995.24	1004.62	35	35	32	9910	3520	1010	359


Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Mounting hole dimensions				
					A	A'				E	F	G	No. of holes	Screw size
SRHFD2-1000R SRHFD2-1000L	m2	153	R L	RDR RDL	995.24	1001.94	25	25	23	10	47.62	180	6	M6
SRHFD3-1000R SRHFD3-1000L	m3	102	R L	RDR RDL	995.24	1004.62	35	35	32	14	47.62	180	6	M10

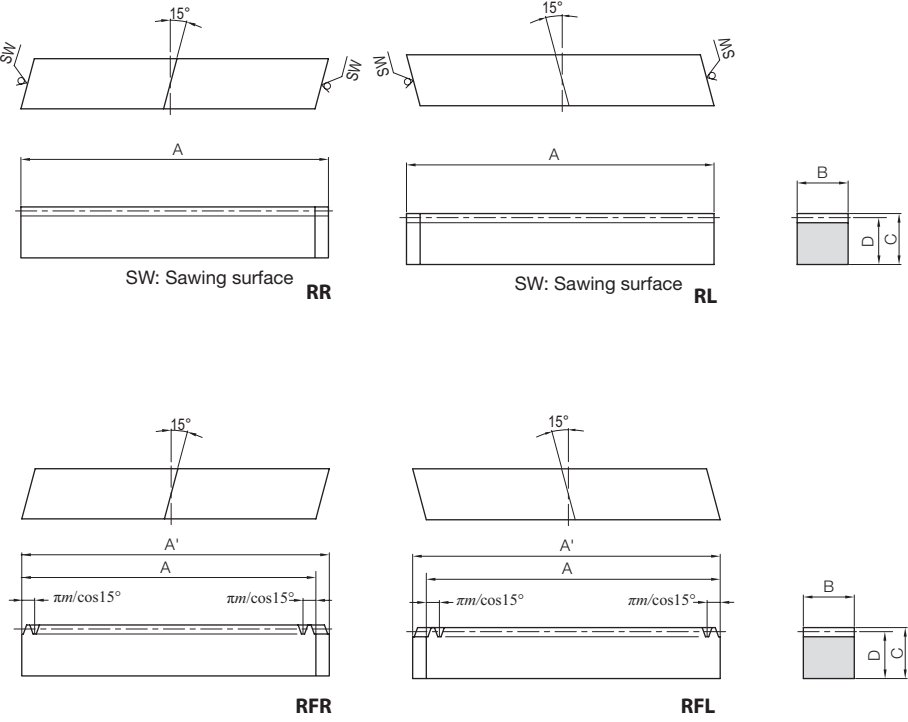

Backlash (mm)	Weight (kg)	Catalog Number
0.12~0.31	4.49	SRHF2-1000R SRHF2-1000L
0.15~0.38	8.75	SRHF3-1000R SRHF3-1000L


Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
7	11	7	4710	1570	481	160	0.12~0.31	4.43	SRHFD2-1000R SRHFD2-1000L
10.8	17.5	11	9910	3520	1010	359	0.15~0.38	8.52	SRHFD3-1000R SRHFD3-1000L

Recommended Mating Pinions

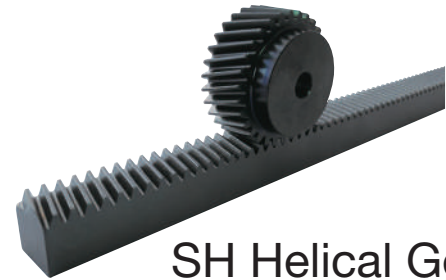


SH Helical Gears

Please see Page 202 for more details.

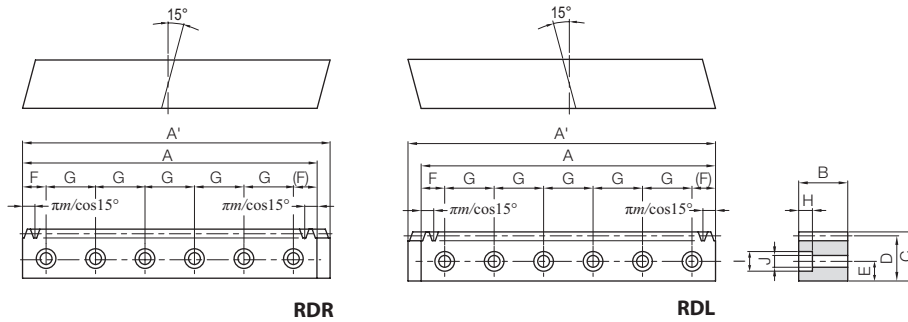



Specifications	
Precision grade	KHK R 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" right helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

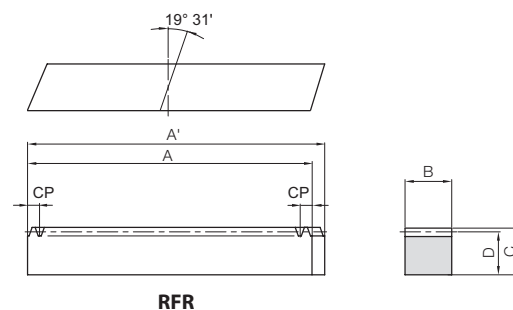

RFR


Catalog Number	Module (front pitch mm)	No. of teeth	Shape	Total Length		Face width	Height	Height to pitch line
				A	A'			
SRHEF1.5-1000R	m1.5 (CP5)	200	RFR	1000	1006.03	17	17	15.5
SRHEF2-1000R	m2 (CP6.667)	150			1008.51	24	24	22
SRHEF3-1000R	m3 (CP10)	100			1010.29	29	29	26
SRHEF4-1000R	m4 (CP13.333)	75			1013.83	39	39	35
SRHEF5-1000R	m5 (CP16.667)	60			1017.38	49	39	34
SRHEF6-1000R	m6 (CP20)	50			1020.93	59	49	43




Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
Bending strength	Surface durability	Bending strength	Surface durability			
2410	425	245	43.3	0.10~0.28	2.06	SRHEF1.5-1000R
4410	675	450	68.8	0.12~0.32	4.14	SRHEF2-1000R
8210	1650	837	168	0.15~0.39	5.91	SRHEF3-1000R
15200	2700	1550	275	0.19~0.47	10.7	SRHEF4-1000R
22500	4110	2300	419	0.21~0.52	13.1	SRHEF5-1000R
33400	7240	3410	738	0.23~0.57	19.9	SRHEF6-1000R




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S1

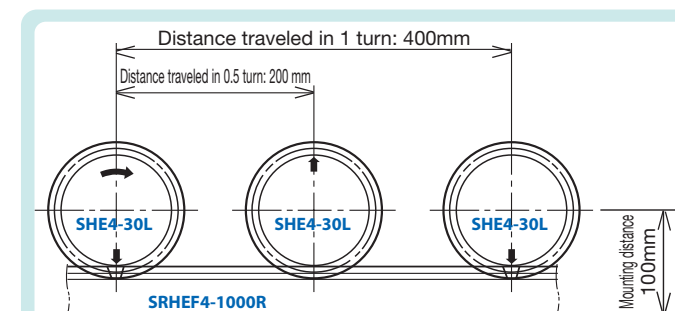

Distance of the pinion traveled in one turn and mounting distance

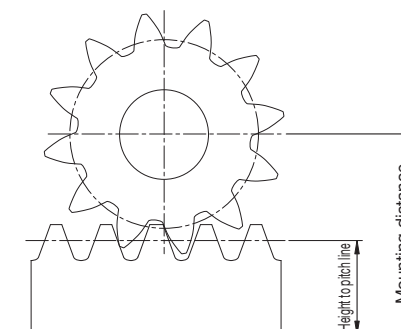


Mounting distance of profile helix gear and meshing rack

Catalog Number	Module (front pitch mm)	No. of teeth	Profile shift coefficient	Mounting distance	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width
						A _{H7}	B	C	D	E	F
SHE1.5-20L	m1.5 (CP5)	20	+0.390	32	S1	10	25	31.83	36	18	14
SHE1.5-25L		25	+0.404	36		12	35	39.79	44	18	14
SHE1.5-30L		30	+0.418	40		15	40	47.75	52	18	14
SHE2-18L	m2 (CP6.667)	18	+0.451	42		12	30	38.20	44	25	16
SHE2-24L		24	+0.268	48		15	45	50.93	56	25	16
SHE2-30L		30	+0.085	54		18	55	63.66	68	25	16
SHE3-20L	m3 (CP10)	20	+0.390	59		20	55	63.66	72	30	20
SHE3-25L		25	+0.404	67		20	70	79.58	88	30	20
SHE3-30L		30	+0.418	75		25	85	95.49	104	30	20
SHE4-18L	m4 (CP13.333)	18	+0.201	74		20	65	76.39	86	40	25
SHE4-24L		24	+0.268	87		20	90	101.86	112	40	25
SHE4-30L		30	+0.335	100		25	110	127.32	138	40	25
SHE5-18L	m5 (CP16.667)	18	+0.451	84		25	85	95.49	110	50	25
SHE5-24L		24	+0.468	100		25	110	127.32	142	50	25
SHE6-20L	m6 (CP20)	20	+0.390	109		30	110	127.32	144	60	28
SHE6-25L		25	+0.404	125		30	140	159.15	176	60	28


Total Length G	Distance traveled in one turn Distance traveled (mm)	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
		Bending strength	Surface durability	Bending strength	Surface durability			
32	100	35.6	5.89	3.63	0.60	0.10~0.28	0.16	SHE1.5-20L
32	125	46.5	10.3	4.75	1.05		0.26	SHE1.5-25L
32	150	57.6	16.3	5.87	1.66		0.36	SHE1.5-30L
41	120	78.2	11.2	7.98	1.15	0.12~0.32	0.30	SHE2-18L
41	160	107	24.4	10.9	2.48		0.56	SHE2-24L
41	200	136	43.8	13.8	4.46		0.85	SHE2-30L
50	200	238	45.7	24.2	4.66	0.15~0.39	1.06	SHE3-20L
50	250	310	80.1	31.6	8.17		1.72	SHE3-25L
50	300	384	127	39.2	12.9		2.47	SHE3-30L
65	240	474	89.8	48.3	9.16	0.19~0.47	1.99	SHE4-18L
65	320	687	183	70.0	18.6		3.76	SHE4-24L
65	400	902	317	92.0	32.3		5.78	SHE4-30L
75	300	978	171	99.7	17.4	0.21~0.52	3.91	SHE5-18L
75	400	1380	354	141	36.1		6.95	SHE5-24L
88	400	1900	402	194	40.9	0.23~0.57	8.05	SHE6-20L
88	500	2480	705	253	71.9		12.8	SHE6-25L



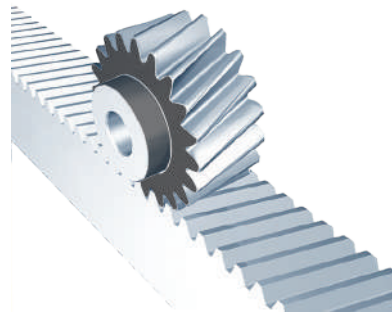

Specifications	
Precision grade	DIN3962, 3963, 3967 Grade Q6*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Pressure angle	20°
Helix angle/direction	19° 31' 41" right helix
Material	DIN C45 (JIS S45C equivalent)
Heat Treatment	Gear teeth induction hardened
Tooth hardness	HRC55 to 60

* Equivalent to KHK R 001 Grade 2. The precision grade of J Series products is equivalent to the value shown in the table.

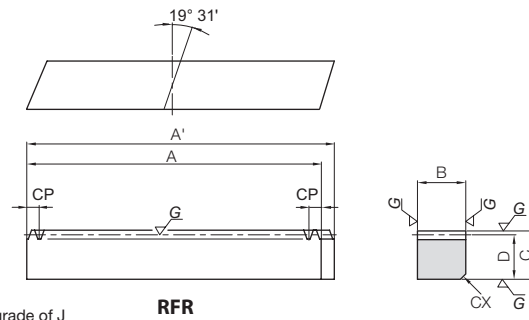


Catalog Number	Module (front pitch mm)	No. of teeth	Shape	Total Length		Face width	Height	Height to pitch line	C Chamfer Amount	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	A'					Bending strength	Surface durability	Bending strength	Surface durability		
ZST2-1000R ZST2-2000R	m2 (CP6.667) m2 (CP6.667)	150 300	RFR	1000 2000	1008.51 2008.52	24	24	22	2	4410	2140	450	219	0.06~0.14	4.13 8.26
ZST3-1000R ZST3-2000R	m3 (CP10) m3 (CP10)	100 200		1000 2000	1010.29 2010.29	29	29	26		8210	5580	837	569		5.90 11.8
ZST4-1000R ZST4-2000R	m4 (CP13.333) m4 (CP13.333)	75 150		1000 2000	1013.83 2013.83	39	39	35		15200	8960	1550	914		10.7 21.4
ZST5-1000R ZST6-1000R	m5 (CP16.667) m6 (CP20)	60 50		1000 2000	1017.38 2020.93	49	49	43		22500 33400	13300 22800	2300 3410	1360 2320		13.0 19.9

Catalog Number	Module (front pitch mm)	No. of teeth	Shape	Total Length		Face width	Height	Height to pitch line	C Chamfer Amount	Mounting hole dimensions					
				A	A'					E	F	(F')	G	No. of holes	Screw size
ZSTD2-1000RJ ZSTD2-2000RJ	m2 (CP6.667)	150 300	RDR	1000 2000	1008.51 2008.52	24	24	22	2	8	71.01	53.99	125	8 16	M6
ZSTD3-1000RJ ZSTD3-2000RJ	m3 (CP10)	100 200		1000 2000	1010.29 2010.29	29	29	26		9	72.79	52.21		8 16	M8
ZSTD4-1000RJ ZSTD4-2000RJ	m4 (CP13.333)	75 150		1000 2000	1013.83 2013.83	39	39	35		12	76.33	48.67		8 16	M8
ZSTD5-1000RJ ZSTD6-1000RJ	m5 (CP16.667) m6 (CP20)	60 50		1000 2000	1017.38 2020.93	49	49	43		16	83.43	41.57		8 16	M12 M16



Specifications	
Precision grade	JIS B 1702-1:1998 Grade N6
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	HRC50 to 60
Surface treatment	Black oxide coated except for ground part
Shape	S1

* The precision grade of J Series products is equivalent to the value shown in the table.




S1

Catalog Number	Module (front pitch mm)	No. of teeth	Profile shift coefficient	Mounting Distance	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Distance traveled in one turn	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)
													Bending strength	Surface durability	Bending strength	Surface durability	
ZSTP2-18L ZSTP2-24L ZSTP2-30L	m2 (CP6.667)	18 24 30	+0.451 +0.268 +0.085	42 48 54	12 15 18	30 45 55	38.20 50.93 63.66	44 56 68	25	16	41	120 160 200	124 169 214	71.4 162 263	12.6 17.3 21.8	7.28 16.5 26.9	0.06~0.14
ZSTP3-20L ZSTP3-25L ZSTP3-30L	m3 (CP10)	20 25 30	+0.390 +0.404 +0.418	59 67 75	20 20 25	55 70 85	63.66 79.58 95.49	72 88 104	30	20	50	200 250 300	375 490 606	275 471 729	38.3 50.0 61.8	28.0 48.0 74.4	
ZSTP4-18L ZSTP4-24L ZSTP4-30L	m4 (CP13.333)	18 24 30	+0.201 +0.268 +0.335	74 87 100	20 20 25	65 90 110	76.39 101.86 127.32	86 112 138	40	25	65	240 320 400	748 1080 1420	530 1050 1910	76.3 111 145	54.0 107 195	
ZSTP5-18L ZSTP5-24L	m5 (CP16.667)	18 24	+0.451 +0.468	84 100	25	85 110	95.49 127.32	110 142	50	25	75	300 400	1540 2180	985 1980	157 222	100 202	
ZSTP6-20L ZSTP6-25L	m6 (CP20)	20 25	+0.390 +0.404	109 125	30	110 140	127.32 159.15	144 176	60	28	88	400 500	3000 3920	2240 3850	306 400	229 392	0.06~0.15

PUH Lubricated
Helical Gears



Please see Page 476 for more details.

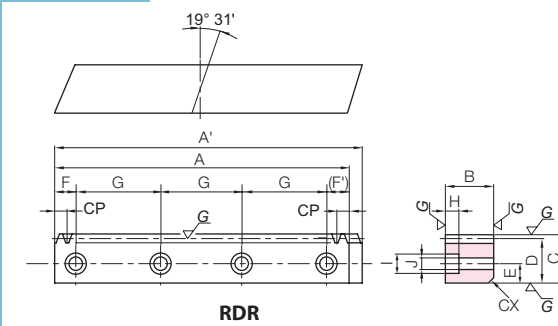


ZST-GL
Assembly Gauges





Material: S45C
Accuracy: KHK R 001 Grade 2
Please see Page 264 in the Master Catalog for more details.

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number : J Series (Available-on-request)
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
7	11	7	4410	2140	450	219	0.06~0.14	4.05 8.09	ZSTD2-1000RJ ZSTD2-2000RJ
8.6	14	9	8210	5580	837	569		5.70 11.4	ZSTD3-1000RJ ZSTD3-2000RJ
8.6	14	9	15200	8960	1550	914		10.4 20.9	ZSTD4-1000RJ ZSTD4-2000RJ
13	20	14	22500	13300	2300	1360	0.06~0.15	12.4	ZSTD5-1000RJ
17.5	26	18	33400	22800	3410	2320		18.6	ZSTD6-1000RJ

Ground Helical Gears



S1K

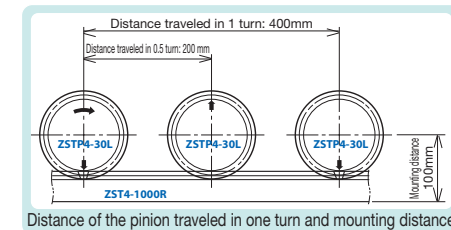

Mounting distance of profile helix gear and meshing rack


To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.																											
Keyway Js9	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80					
Screw size	4x1.8	5x2.3				6x2.8				8x3.3				10x3.3		12x3.3	14x3.8		16x4.3	18x4.4		20x4.9		22x5.4				
Catalog Number	M4					M5					M6				M8			M10		M12			M16					
ZSTP2-18LJ BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																		
ZSTP2-24LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																		
ZSTP2-30LJ BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K															
ZSTP3-20LJ BORE								S1K	S1K	S1K	S1K	S1K	S1K															
ZSTP3-25LJ BORE								S1K	S1K		S1K	S1K	S1K	S1K	S1K	S1K												
ZSTP3-30LJ BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		S1K	S1K							
ZSTP4-18LJ BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
ZSTP4-24LJ BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
ZSTP4-30LJ BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
ZSTP5-18LJ BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
ZSTP5-24LJ BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
ZSTP6-20LJ BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
ZSTP6-25LJ BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		






Specifications	
Precision grade	KHK R 001 grade 2
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

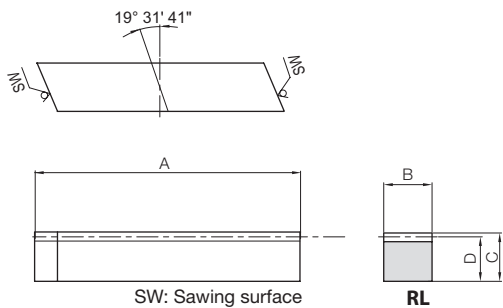

Catalog Number	Normal module (front pitch mm)	Effective No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Weight (kg)
				A	B	C	D	
ZST1.5-GL	m1.5 (CP5)	9	RL	59	17	17	15.5	0.11
ZST2-GL	m2 (CP6.667)	7		66	25	25	23	0.26
ZST3-GL	m3 (CP10)	8		108	30	30	27	0.62
ZST4-GL	m4 (CP13.333)	6		118	40	40	36	1.17
ZST5-GL	m5 (CP16.667)	4		115	50	50	45	1.72
ZST6-GL	m6 (CP20)	3		119	60	60	54	2.49


Points of Caution in Assembling

① ZST/ZSTD ground racks are designed to give the proper backlash when assembled using the mounting distance (tolerance of H7 to H8 required) given by the ZSTP Mating Pinion Dimension Table (Page 262). Make sure that the mounting distance stays constant for the length of the rack.




② Machined end type racks such as the ZST and ZSTD Series have pitch tolerance of -0.05 to -0.4mm at the end face. If you try to connect the racks without any space, the pitch at the connection will be too small and will cause problems. Please follow the following diagrams, "Connecting the Racks," for assembly.

③ The ZST/ZSTD type of KHK stock ground racks have four surfaces ground parallel with high precision. To maintain true angle, they should be mounted on high precision bases (within 10 μ m recommended) as shown below. It is even possible to correct for the angular errors of racks by compensating the mounting base. With recent increases in the requirement for zero backlash linear drives, such accurate assembly as shown is becoming more important. If the racks are not secured properly to the base, they could shift during operation and cause unexpected problems. It is very important to insure firm mounting by the use of dowel pins or similar devices. Please see Page 222 for more details.

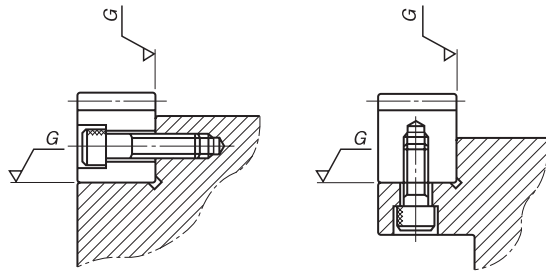

Connecting the Racks

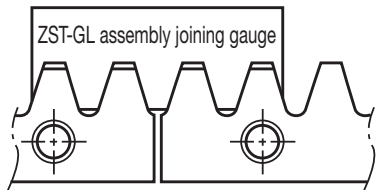


[NOTE] Please use the ZST-GL assembly gauge for the joining rack.



CP Racks & Pinions

KTSCP [CP] Tapered Pinions	STRCPF/STRCPFD [CP] Tapered Racks	MSCPG [CP] Ground Spur Gears	MRGCPF/MRGCPFD [CP] Hardened Ground Racks	KSCP [CP] Ground Spur Gears	KRGCPF-H/KRGCPFD-H [CP] Hardened Ground Racks	KRGCP/KRGCPF/KRGCPFD [CP] Thermal Refined Ground Racks
Material: SCM440 CP5, 10 Page 274	Material: S45C CP5, 10 Page 274	Material: SCM415 CP5, 10 Page 276	Material: SCM415 CP5, 10 Page 276	Material: SCM440 CP5, 10 Page 278	Material: SCM440 CP5, 10 Page 278	Material: SCM440 CP5, 10 Page 280
SSCPGS [CP] Ground Spur Pinion Shafts	SSCPG [CP] Ground Spur Gears	SRGCP/SRGCPF/SRGCPFD [CP] Hardened Ground Racks	KRCPPF-H/KRCPPFD-H [CP] Hardened Racks	KSSCP [CP] Thermal Refined Spur Gears	KRCPPF/KRCPPFD [CP] Thermal Refined Racks	SSCP [CP] Spur Gears
Material: S45C CP5, 10 Page 282	Material: S45C CP5~20 Page 282	Material: S45C CP5~20 Page 284	Material: SCM440 CP5, 10 Page 286	Material: SCM440 CP5, 10 Page 288	Material: SCM440 CP5, 10 Page 288	Material: S45C CP2.5~20 Page 290
SRCPF-H/SRCPFD-H [CP] Hardened Racks	SRCPF-HL/SRCPFD-HL [CP] Laser hardened	SRCP/SRCPF/SRCPFD/SRCPFK [CP] Racks	SUSCP [CP] Stainless Steel Spur Gears	SURCPF/SURCPFD [CP] Stainless Steel Racks	SROCP [CP] Round Racks	FRCP [CP] Metal Flexible Racks
Material: S45C CP5~20 Page 292	Material: S45C CP5~20 Page 294	Material: S45C CP2.5~20 Page 296	Material: SUS303 CP5, 10 Page 298	Material: SUS304 CP5, 10 Page 298	Material: S45C CP2.5~10 Page 300	Material: SS400 CP5 Page 300

M Includes Made to Order

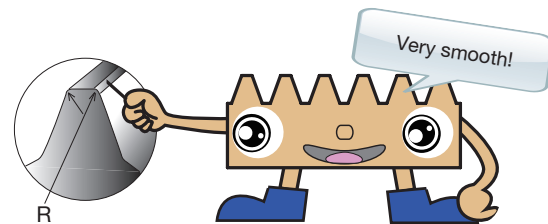

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Racks

S R CP 5 - 100

Material (S45C)
Type (Rack)
Circular pitch (5)
Total Length (100mm)

Material
M SCM415
K SCM440
S S45C
SU Stainless Steel
F SS400

Type
R Racks
RO Round Racks
S Spur Gears
TR(TS) Tapered Racks (Spur Gears)

Other Information
F Racks with Machined Ends
D Racks with Bolt Holes
K Racks with Drill Holes
G Ground Gears
H Gear teeth induction hardened
S Pinion Shafts
HL Laser hardened