




Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating




R2

Catalog Number	Pitch mm (Module)	Effective number of teeth	Shape	Total Length		Outside dia.	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	d _h			Bending strength	Surface durability	Bending strength	Surface durability		
SROCP2.5-500	CP2.5 (0.7958)	200	R2	505	10	9.2	13.41	474	91.8	48.3	9.36	0.00~0.14	0.30
SROCP5-500	CP5 (1.5915)	99		505	15			1650	324	169	33.1	0.09~0.25	0.65
SROCP10-1000	CP10 (3.1831)	99		1010	30			6610	1300	674	132	0.14~0.35	5.16




Specifications	
Precision grade	KHK R 001 grade 8
Gear teeth	Standard full depth
Pressure angle	20°
Material	SS400
Heat treatment	—
Tooth hardness	(less than 187HB)
Surface treatment	Black oxide coating

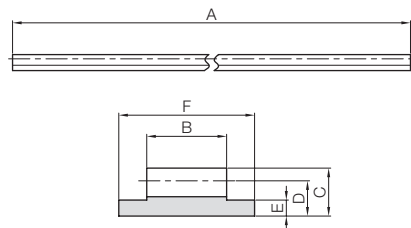

R3

Catalog Number	Pitch mm (Module)	Shape	Total Length		Face width	Height	Height to pitch line	Base thickness	Base width	Allowable force (N)		Weight (kg)
			A	B						Bending strength	Bending strength	
FRCP5-2000	CP5 (1.5915)	R3	2000	10	6	4.41	2	17	801	81.7		0.91
FRCP5-3000			3000									1.37
FRCP5-4000			4000									1.83

Installation Example of FRCP Metal Flex Rack

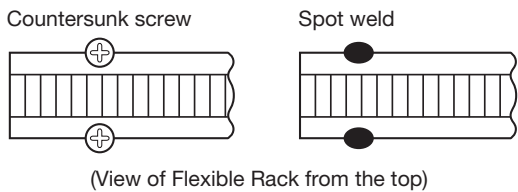

(View of Flexible Rack from the top)

Recommended Mating Pinions



SSCP

Please see Page 290 for more details.



Miter Gears

MMSGQ Ground Spiral Miter Gears	MMSG Ground Spiral Miter Gears	SMSG Ground Spiral Miter Gears	MMSA/MMSB Finished Bore Spiral Miter Gears	MMS Spiral Miter Gears	SMS Spiral Miter Gears	SMA/SMB/SMC Finished Bore Miter Gears
NEW					NEW	
Material: SCM415 m2~4 Page 310	Material: SCM415 m2~4 Page 312	Material: S45C m1~5 Page 314	Material: SCM415 m1~10 Page 316	Material: SCM415 m2~5 Page 318	Material: S45C m1~8 Page 320	Material: S45C m1~8 Page 322
MM Miter Gears	LM Sintered Metal Miter Gears	SM Miter Gears	SAM Angular Miter Gears	SUM Stainless Steel Miter Gears	SUMA Finished Bore Stainless Steel Miter Gears	PM Plastic Miter Gears
NEW		NEW				
Material: SCM415 m2~5 Page 324	Material: SMF5040 m0.8~1.5 Page 324	Material: S45C m1~8 Page 326	Material: S45C m1.5~3 Page 328	Material: SUS303 m1~4 Page 330	Material: SUS303 m1~4 Page 330	Material: MC901 m1~4 Page 332
DM Injection Molded Miter Gears	BB Sintered Metal Bushings	Nissei KSP Ground Spiral Miter				
Material: Duracon (R) (M90-44) m0.5~1.5 Page 332	Material: Oil-free copper alloy φ 5~8 Page 334	Material: SCM415 m1.5~6 Page 370				

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Miter Gears

M MS G 2 - 20 R

Direction of Helix (Right)
No. of Teeth (20)
Module (2)
Other Products (Ground Gears)
Type (Spiral Miter)
Material (SCM415)

Material
S S45C
M SCM415
SU Stainless Steel
L Sintered Metal Alloy
P MC901
D Polyacetal

Type
M Straight Miter Gears
MS Spiral Miter Gears
AM Angular Miter Gears

Other Information
G,GQ Ground Gears

Features



Miter gears are a special class of bevel gears where the shafts intersect at 90° and the gear ratio is 1:1. KHK stock miter gears are available in two types, straight miter and spiral miter, with high precision grade for demanding torques and speeds, and commercial grade for economical applications. The following table lists the main features for easy selection.


Type	Catalog Number	Module	No. of Teeth () Shaft Angle	Material	Heat Treatment	Tooth Surface Finish	Precision JIS B 1704: 1978	Secondary Operations	Features
Spiral Miter Gears	MMSGQ	2~4	20, 30	SCM415	Carburized Note 1	Ground	0	△	Gears that have been hardened and ground that has grade-0 accuracy, strength, abrasion resistance and quietness. Secondary operations can be given except for the teeth.
	MMSG	2~4	20, 25, 30	SCM415	Carburized Note 1	Ground	1	△	Gears that have been hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations can be given except for the teeth.
	SMSG	1~5	20, 25, 30	S45C	Gear teeth induction hardened	Ground	2	△	Gears that have been hardened and ground that has excellent abrasion resistance. Secondary operations can be given except for the teeth.
	KSP	1.5~6	20~30	SCM415	Carburized Note 1	Ground	0	△	Gears that have been hardened and ground that has grade-0 accuracy, strength, abrasion resistance and quietness. Secondary operations can be given except for the teeth.
	MMSA/MMSB	1~10	20	SCM415	Carburized	Cut	4	×	Gears that have been fully hardened that have excellent strength and wear resistance. Can be used in the finished shape.
	MMS	2~5	20, 25, 30	SCM415	Carburized Note 1	Cut	4	△	Gears that have been hardened that have excellent strength and wear resistance. Secondary operations are possible except for the teeth.
	SMS	1~5	20, 25, 30	S45C	Gear teeth induction hardened	Cut	4	△	Gears that have been hardened with excellent wear resistance. Secondary operations are possible except for the teeth.
Straight Miter Gears	SMA/SMB/SMC	1~8	20, 25, 30	S45C	Gear teeth induction hardened	Cut	4	△	Gears that have been hardened with excellent wear resistance. Can be used in the finished shape.
	MM	2~5	20, 25, 30	SCM415	Carburized Note 1	Cut	4	△	Gears that have been hardened that have excellent strength and wear resistance. Secondary operations are possible except for the teeth.
	LM	0.8~1.5	20	SMF5040 (S45C equivalent)	—	Sintered	5	○	Small gears made through sintering.
	SM	1~8	16, 20, 25, 30	S45C	—	Cut	3	○	Many lineups are available. The teeth can be additionally hardened.
	SAM	1.5~3	20 (45°, 60°, 120°)	S45C	—	Cut	3	○	3 types of angular miter are available for shafts at 45°, 60° and 120°.
	SUM	1~4	20, 25, 30	SUS303	—	Cut	3	○	Stainless steel gears with rust resistance.
	SUMA	1~4	20, 25	SUS303	—	Cut	3	△	Stainless steel gears with rust resistance. Keyways and tapping provided.
	PM	1~4	20, 25, 30	MC901	—	Cut	4	○	Nylon gears can be used with no lubrication.
	DM	0.5~1.5	20	Duracon (R) (M90-44) NOTE 2	—	Injection Molded	6	△	Low-priced gears made through injection molding. Suitable for light loads.

[NOTE 1] Although these are carburized products, secondary operations can be performed as the bore and the hub portions are masked during the carburization. However, note that high hardness (HRC40 at maximum) occurs in some cases.
 [NOTE 2] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

○ Possible △ Partly possible × Not possible

We use the Crowning method for gear cutting

KHK utilizes Gleason Coniflex No.104 and 114 bevel gear generating machinery, and is equipped for mass production of straight miter gears. You can count on a stable supply of straight miter gears from KHK



Gleason Coniflex No.104

Application Examples




KHK stock bevel gears (miter gears) are adopted in driving devices for all kinds of intersecting axes, including transport devices.

■ Masdac Dorayaki Machine



SM miter gears used for reversing fabrics


■ Carton former

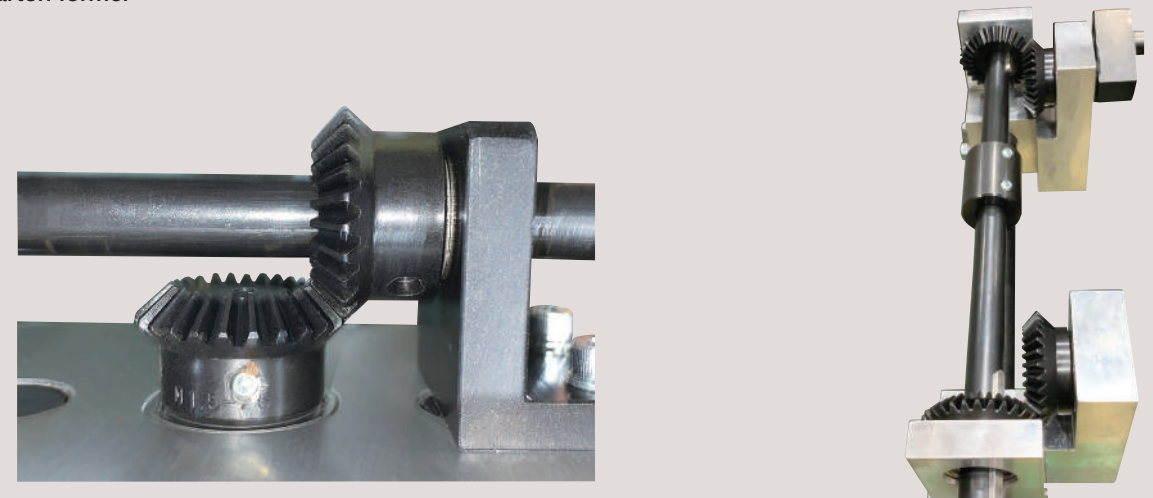

SM and SMB miters used to drive X/Y axes and transmit mechanical power

■ Fish processing machine manufactured by TOYO SUI SAN KIKAI CO.,LTD.

■ Angular Miter Gear Box

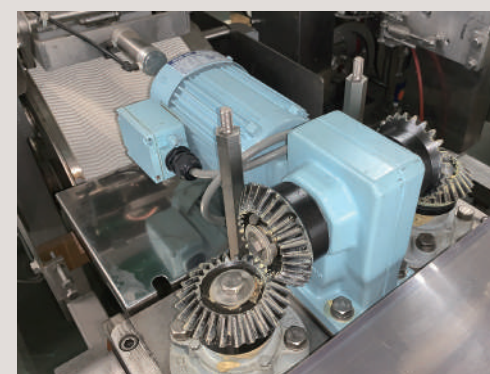

SMB miter used for filleting fish




Selection Hints



Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable “CAUTION” notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

Among KHK stock miter gears, there are products which are not interchangeable even when the module and the number of teeth are the same. Also, spiral miters require additional consideration since the right-hand mates with the left-hand spiral as shown in the table below.

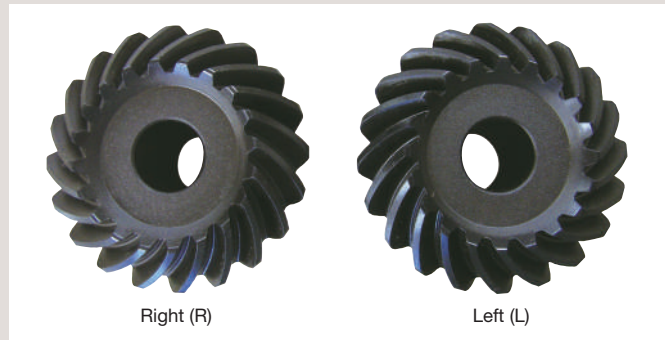

■ Straight Miter (○ Allowable × Not allowable)

Catalog Number	SMA SMB SMC	MM	SM	SUM	SUMA	PM	DM	LM	SAM
SMA/SMB/SMC	○	○	○	○	○	○	×	×	×
MM	○	○	○	○	○	○	×	×	×
SM	○	○	○	○	○	○	×	×	×
SUM	○	○	○	○	○	○	×	×	×
SUMA	○	○	○	○	○	○	×	×	×
PM	○	○	○	○	○	○	×	×	×
DM	×	×	×	×	×	×	○	×	×
LM	×	×	×	×	×	×	×	○	×
SAM	×	×	×	×	×	×	×	×	○

■ Spiral Miter (○ Allowable × Not allowable)

Catalog Number	Series	MMSGQ	MMSG	SMSG	MMSA MMSB	MMS	SMS
Series	Direction of spiral	R	R	R	R	R	R
MMSGQ	L	○	×	×	×	×	×
MMSG	L	×	○	×	×	×	×
SMSG	L	×	×	○	×	×	×
MMSA/MMSB	L	×	×	×	○	×	×
MMS	L	×	×	×	×	○	×
SMS	L	×	×	×	×	×	○

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

■ Calculation of Bending Strength of Gears

Item	Catalog Number	MMSGQ,MMSG MMSA,MMSB MMS,MM	SMSG/SMS SMA/SMB/ SMC	SM SAM	SUM SUMA LM NOTE 2	PM	DM
Formula NOTE 1	Formula of bevel gears on bending strength (JGMA403-01)					The Lewis formula	
No. of teeth of mating gears	Same no. of teeth					—	
Rotational Speed	100rpm (600rpm for MMSGQ, MMSG and SMSG)					100rpm	
Design Life (Durability)	Over 10 ⁷ cycles					—	
Impact from motor	Uniform load					Allowable bending stress (kgf/mm ²)	
Impact from load	Uniform load						
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)						
Allowable bending stress at root σ_{rim} (kgf/mm ²)	47					1.15 (40°C with No Lubrication)	
Safety factor K_R	1.2					m 0.5 4.0 m 0.8 4.0 m 1.0 3.5 m 1.5 1.8 NOTE 2 (40°C with Grease Lubrication)	

■ Calculation of Surface Durability (Except where it is common with bending strength)

Formula NOTE 1	Formula of bevel gears on surface durability (JGMA404-01)			
Kinematic viscosity of lubricant	100cSt (50°C)			
Gear support	Shafts & gear box have normal stiffness, and gears are supported on one end			
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	90	49	41.3
Safety factor C_R	1.15			

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, “MC Nylon Technical Data” by Mitsubishi Chemical Advanced Materials and “Duracon (R) Gear” by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

[NOTE 2] The values of the allowable bending stresses for DM m1.5 gears and the allowable root bending stress for LM gears are our own estimates.

Selecting the Gears

Step 1

Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

■ For provisional selection from this catalog


Catalog Number	No. of teeth	Series	Direction of spiral	Pitch diameter (mm)										Addendum diameter (mm)			Throat diameter (mm)			B (mm)
				A	B	C	D	E	F	G	H	I	J	K	L	M	N	O		
MMSG2-20R	1	20	B3	12	35	40	42.7	35	21.98	16.35	12.5	20	9	24.54	17.0	23.5	1.73	2.40	0.04~0	
MMSG2-20L				14	42	50	53.2	45	28.63	21.6	16	26	11	30.89	32.7	46.1	3.33	4.70	0.05~0	
MMSG3-20R				16	52	60	63.99	50	30.78	21.99	16	27	14	34.4	58.5	83.7	5.97	8.54	0.06~0	
MMSG3-20L				20	50	70	74.53	55	32.45	22.26	14	29	16	42.75	91.8	133	9.36	13.6	0.07~0	
MMSG4-20R	1	20	B4	20	55	80	84.99	65	39.13	27.5	17	35	18	49.08	136	199	13.8	20.3	0.09~0	
MMSG4-20L				20	55	80	84.99	65	39.13	27.5	17	35	18	49.08	136	199	13.8	20.3	0.09~0	
MMSG2-25R				12	38	50	52.5	40	23.43	16.25	11	21	11	30.89	27.5	47.0	2.80	4.79	0.04~0	
MMSG2-25L				16	45	62.5	65.54	50	29.57	20.27	14	26	14	37.4	54.3	94.5	5.54	9.64	0.05~0	
MMSG3-25R	1	25	B4	20	55	75	78.78	60	35.6	24.39	17	31	17	43.92	94.5	167	9.64	17.0	0.06~0	
MMSG3-25L				25	65	87.5	91.81	70	41.65	28.41	19	37	20	52.43	151	270	15.4	27.5	0.07~0	
MMSG4-25R				28	75	100	104.7	80	47.8	32.35	22	42	23	58.95	216	392	22.1	40.0	0.09~0	
MMSG4-25L				28	75	100	104.7	80	47.8	32.35	22	42	23	58.95	216	392	22.1	40.0	0.09~0	

Step 3

Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. Please see our separate technical reference book for more details. We recommend using the Website that allows the strength to be easily calculated.

■ Use the strength calculation function on our website.

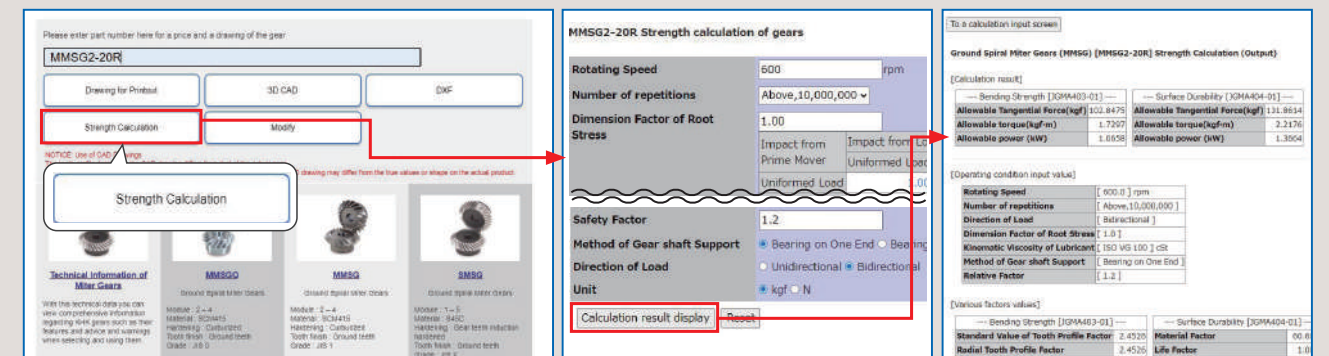

■ Bending strength

Calculated values of the strength at which the gear teeth do not break due to fatigue.

■ Surface durability;

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 306.

- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website

URL: <https://khkgears.net/new/>

Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

Product Precautions



Common Notes

[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 304 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the normal direction of a pair of identical gears in mesh.
- (3) A set of spiral miter gears must be identical in module and number of teeth, but opposite in spiral hands.
- (4) Dimensions of the outside diameter, the total length and crown to back length are all theoretical values, and some differences will occur due to the corner chamfering of the gear tips.
- (5) These bevel gears produce axial thrust forces. Please see Page 308 for more details.
- (6) Variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (7) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (8) For products having a tapped hole, a set screw is included. (excludes B7)

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 308 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.
- (4) For bores over ϕ 50, the bore tolerance is H8.

MMS(A,B) Finished Bore Spiral Miter Gears

[Caution on Product Characteristics]

- (1) The keyway tolerance is the value before hardening.

[Caution on Secondary Operations]

- (1) No secondary operations can be performed on these finished gears due to the applied carburizing process.

SMS Spiral Miter Gears

[Caution on Product Characteristics]

- (1) The bore may slightly vary due to the effect of heat treatment. When using with the indicated hole diameter, provide machining with a reamer or the like before use.

SM(A,B,C) Finished Bore Miter Gears

[Caution on Product Characteristics]

- (1) The dimensions of the keyway marked with * are different from the JIS Standards.

LM Sintered Metal Miter Gears

[Caution on Product Characteristics]

- (1) Steam treatment (where the surface is rusted using steam) is provided.
- (2) The product is not impregnated with lubricating oil.

SAM Angular Miter Gears

[Caution on Product Characteristics]

- (1) The axis angle is where the same products are set together. The axis angle cannot be changed by using it with a different product.

PM Plastic Miter Gears

[Caution on Product Characteristics]

- (1) To reduce heat generation, it is recommended to mate them with steel gears.

DM Plastic Miter Gears

[Caution on Product Characteristics]

- (1) The bore tolerance is -0.05 to -0.30, but it may be slightly higher at the center of the hole.
- (2) For the dimensional accuracy of each part, see the dimensional tolerance of molded items on Page 333.

[Caution on Secondary Operations]

- (1) As it is a molded item, bubbles may form inside the material. Avoid performing secondary operations.

Application Hints

In order to use KHK stock miters safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail: info@khkgears.net

1. Cautions on Handling


- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Resin gears and ring gears deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations


- ① If reboring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or rebored jaws for improved precision. Please exercise caution not to crush the teeth.

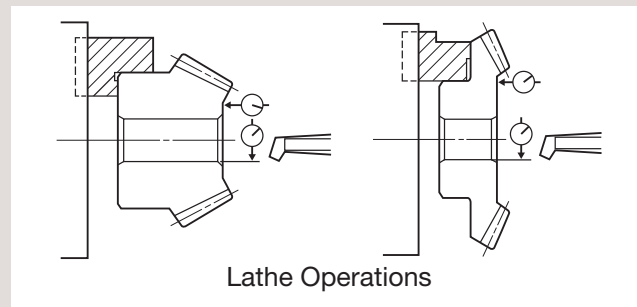

- ④ For items with induction hardened teeth, the hardness is high near the tooth root. When machining the front face, the machined area should be 4 to 6mm smaller than the holding surface diameter dimensions.

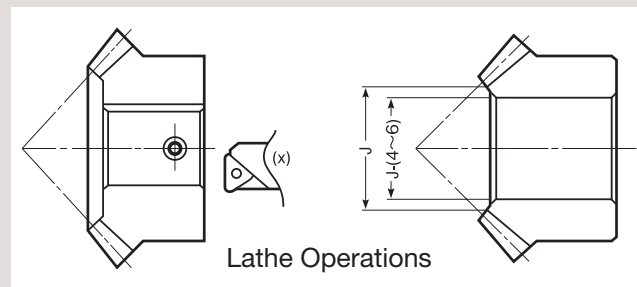


- ⑤ For tapping and keyway operations, see the examples given in "Caution on Performing Secondary Operations" in KHK Stock Spur Gear section. When providing keyway operations, to avoid stress concentration, always round the corners. Make sure that the diameter (O) of the keyway angle is smaller than the diameter of the holding surface.

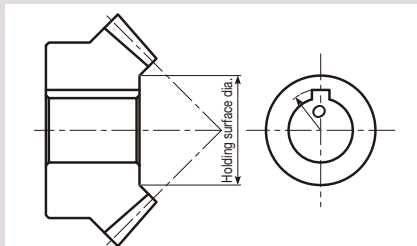


- ⑥ PM plastic miter gears are susceptible to changes due to temperature and humidity. Dimensions may change between, during, and after re-machining operations.
- ⑦ When induction-hardening S45C products, thermal stress cracks may appear. Also, note that the precision grade of the product declines by 1 or 2 grades, as deformation on material may occur. If you require tolerance for bore or other parts, machining is necessary after heat treatment.

3. Points of Caution during Assembly


- ① Since miter gears are cone shaped, they produce axial thrust forces. Specifically with regard to spiral miter gears, the directions of thrust change with the hand of helix and the direction of rotation. This is illustrated below. The bearings must be selected properly to be able to handle these thrust forces. For details, use gear calculation software GCSW.

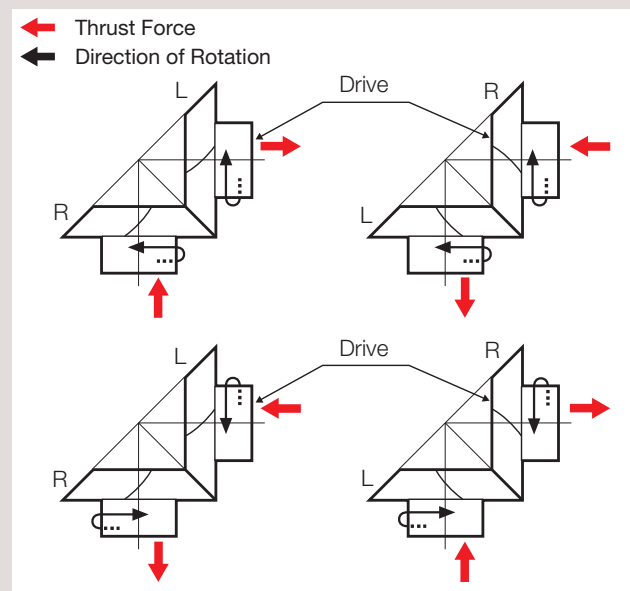

- ② If a gear is mounted on a shaft far from the bearings, the shaft may bend. We recommend designing bevel gears to be as close to the bearings as possible. Design the gear box, shaft and bearing with high rigidity.

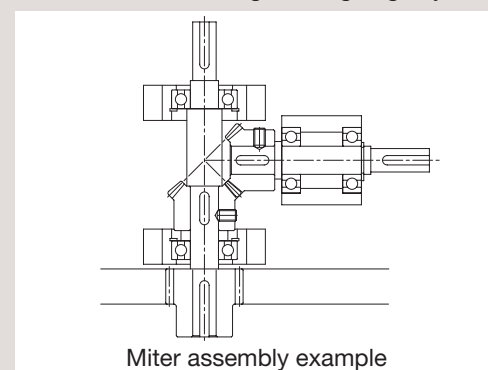

- ③ Be sure to fasten the miter to prevent the gears from moving, as thrust acts on it while rotating.
- ④ When installing MMSA or MMSB finished bore spiral miter gears produced as B7 style (ring gear), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only. (See the top of the right page for reference figure)

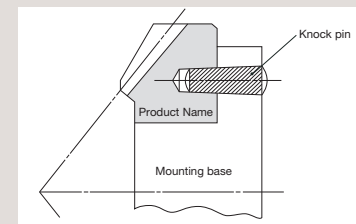


- ⑤ The recommended assemble distance tolerance of KHK stock miters is H7 for ground gears and H8 for cut gears. Mounting distance error, offset error and shaft angle error must be minimized to avoid excessive noise and wear. Inaccurate assembly will lead to irregular noises and uneven wear. Various conditions of tooth contact are shown below. Also, when changing the normal direction backlash, adjust the mounting distance according to the amount of axial movement shown in the table on the right so as not to change the tooth contact.

Shaft angle (°)	Normal direction Backlash	Travel in axial direction	
		Drive gear	Driven gear
90	j_n	$1.03 \times j_n$	$1.03 \times j_n$
60		$1.46 \times j_n$	$1.46 \times j_n$
120		$0.84 \times j_n$	$0.84 \times j_n$

Correct Tooth Contact


- When assembled correctly, the contact will occur on both gears in the middle of the flank and center of face width but somewhat closer to the toe.

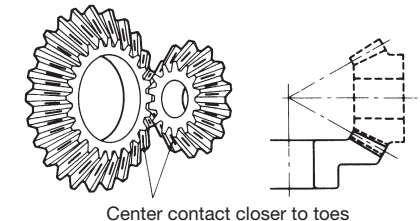

Incorrect Tooth Contact


Mounting Distance Error

- When the mounting distance of the pinion is incorrect, the contact will occur too high on the flank on one gear and too low on the other.

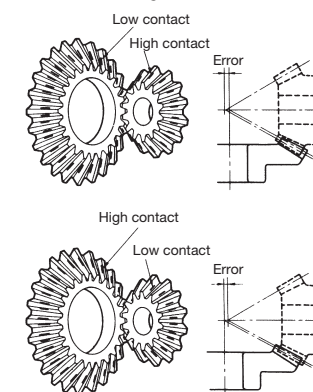


Offset Error

- When the pinion shaft is offset, the contact surface is near the toe of one gear and near the heel of the other.

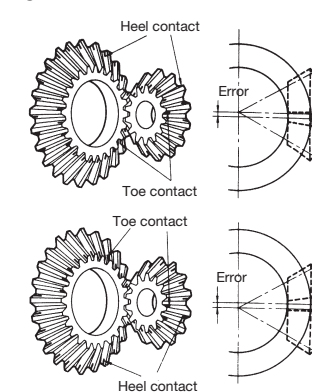

Shaft Angle Error

- When there is an angular error of shafts, the gears will contact at the toes or heels depending on whether the angle is greater or less than 90°.

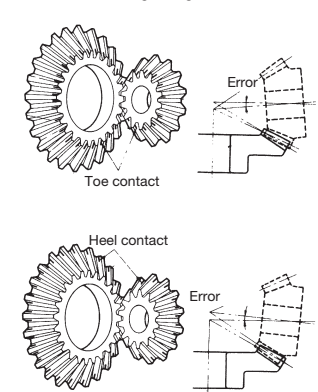

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears fastened securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
 - (Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.



Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.




Caution: Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.




Specifications	
Precision grade	JIS B 1704: 1978 grade 0 ⁺
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.




B3




B4

J Series



B3K



B4K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Mounting distance E	Total length F	Crown to back G	Hub width H	Hole length I	Face width J	Holding surface dia. K	Allowable torque (N·m) Bending strength	Allowable torque (kgf·m) Surface durability	Backlash (mm)	Weight (kg)		
MMSGQ2-20R MMSGQ2-20L	1	20	B3	R L	12 14	35 42	40 50	40 51	35 45	21 28	16.35 21.6	12.5 16	20 26	9 11	24.54 30.89	17.0 32.7	23.5 46.1	1.73 3.33	2.40 4.70	0.05~0.10	0.14
MMSGQ2.5-20R MMSGQ2.5-20L				R L	14 16	42 52	50 60	51 61	45 50	28 30	21.6 21.99	16 16	26 27	11 14	30.89 34.4	32.7 58.5	46.1 83.7	3.33 5.97	4.70 8.54		0.27
MMSGQ3-20R MMSGQ3-20L				R L	16 20	52 50	60 70	61 71	50 55	30 31.5	21.99 22.26	16 14	27 29	14 16	34.4 42.75	58.5 91.8	83.7 133	5.97 9.36	8.54 13.6		0.43
MMSGQ3.5-20R MMSGQ3.5-20L			B4	R L	20 20	50 55	70 80	71 81	55 65	31.5 38	22.26 27.5	14 17	29 35	16 18	42.75 49.08	91.8 136	133 199	9.36 13.8	13.6 20.3		0.51
MMSGQ4-20R MMSGQ4-20L				R L	20 20	55 55	80 80	81 81	65 65	38 38	27.5 27.5	17 17	35 35	18 18	49.08 49.08	136 136	199 199	13.8 13.8	20.3 20.3		0.80
MMSGQ2-30R MMSGQ2-30L				R L	14 16	45 55	60 75	60 76	50 60	28.5 33	21.21 24.02	15 16	26 30	12 15	38.06 47.57	38.5 75.3	78.6 156	3.93 7.68	8.02 16.0		0.36
MMSGQ2.5-30R MMSGQ2.5-30L	1	30	B4	R L	16 20	55 65	75 90	76 91	60 70	33 39.5	24.02 26.8	16 18	30 36	15 20	47.57 55.43	75.3 139	156 294	7.68 14.2	16.0 30.0	0.05~0.10	0.66
MMSGQ3-30R MMSGQ3-30L				R L	20 25	65 80	90 105	91 106	70 80	39.5 43.5	26.8 29.6	18 20	36 40	20 22	55.43 67.77	139 204	294 436	14.2 20.8	30.0 44.5		1.11
MMSGQ3.5-30R MMSGQ3.5-30L				R L	25 28	80 90	105 120	106 121	80 90	43.5 48	29.6 32.35	20 22	40 44	22 25	67.77 77.29	204 303	436 657	20.8 30.9	44.5 67.0		1.75
MMSGQ4-30R MMSGQ4-30L				R L	28 28	90 90	120 120	121 121	90 90	48 48	32.35 32.35	22 22	44 44	25 25	77.29 77.29	303 303	657 657	30.9 30.9	67.0 67.0		2.49
MMSGQ4-30R MMSGQ4-30L				R L	28 28	90 90	120 120	121 121	90 90	48 48	32.35 32.35	22 22	44 44	25 25	77.29 77.29	303 303	657 657	30.9 30.9	67.0 67.0		2.49

Bore H7		* The product shapes of J Series items are identified by background color.																	
Keyway Js9		12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
Screw size		4x1.8	5x2.3				6x2.8				8x3.3			10x3.3		12x3.3	14x3.8		
Catalog Number		M4					M5				M6			M8			M10		
MMSGQ2-20R J BORE	B3K	B3K	B3K	B3K	B3K	B3K	B3K												
MMSGQ2-20L J BORE	B3K	B3K	B3K	B3K	B3K	B3K	B3K												
MMSGQ2.5-20R J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSGQ2.5-20L J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSGQ3-20R J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K								
MMSGQ3-20L J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K								
MMSGQ3.5-20R J BORE									B4K	B4K	B4K	B4K	B4K						
MMSGQ3.5-20L J BORE									B4K	B4K	B4K	B4K	B4K						
MMSGQ4-20R J BORE									B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ4-20L J BORE									B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ2-30R J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSGQ2-30L J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSGQ2.5-30R J BORE					B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K						
MMSGQ2.5-30L J BORE					B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K						
MMSGQ3-30R J BORE									B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSGQ3-30L J BORE									B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSGQ3.5-30R J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSGQ3.5-30L J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSGQ4-30R J BORE												B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSGQ4-30L J BORE												B4K	B4K	B4K	B4K	B4K	B4K	B4K	

Product Precautions




Page 306

Precautions for Standard Machined Products



Pages 38~40


JIS grade 0 Ground bevel gears
Custom Gears are also available.

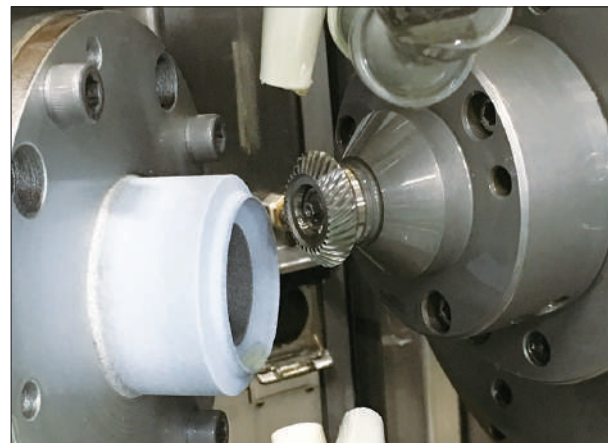

CNC Bevel Gear Grinding Machine (PH-280HG)



Gear Measuring System (350GMS)

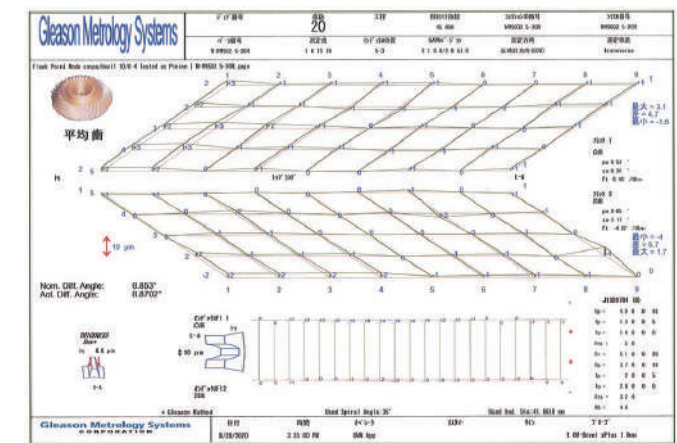





Gear Measurement Data

All machining datum planes are cut and locating the center is made easy to maintain accuracy KHK's highest-grade spiral miter with excellent quietness



Specifications	
Precision grade	JIS B 1704: 1978 grade 1
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

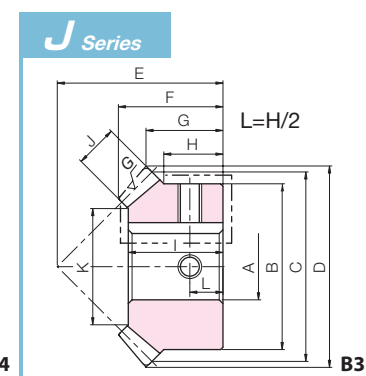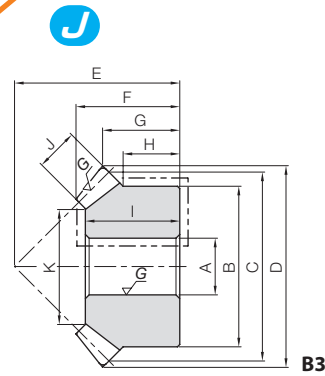

To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash	Weight
					A _{H7}	B	C	D	E	F	G	H	I	J	K	Bending strength	Surface durability	Bending strength	Surface durability	(mm)	(kg)
MMSG2-20R MMSG2-20L	1	20	B3	R L	12	35	40	42.7	35	21.98	16.35	12.5	20	9	24.54	17.0	23.5	1.73	2.40	0.04~0.10	0.14
MMSG2.5-20R MMSG2.5-20L				R L	14	42	50	53.2	45	28.63	21.6	16	26	11	30.89	32.7	46.1	3.33	4.70	0.05~0.11	0.27
MMSG3-20R MMSG3-20L				R L	16	52	60	63.99	50	30.78	21.99	16	27	14	34.4	58.5	83.7	5.97	8.54	0.06~0.12	0.43
MMSG3.5-20R MMSG3.5-20L			B4	R L	20	50	70	74.53	55	32.45	22.26	14	29	16	42.75	91.8	133	9.36	13.6	0.07~0.13	0.51
MMSG4-20R MMSG4-20L				R L	20	55	80	84.99	65	39.13	27.5	17	35	18	49.08	136	199	13.8	20.3	0.09~0.15	0.80
MMSG2-25R MMSG2-25L	1	25	B4	R L	12	38	50	52.5	40	23.43	16.25	11	21	11	30.89	27.5	47.0	2.80	4.79	0.04~0.10	0.21
MMSG2.5-25R MMSG2.5-25L				R L	16	45	62.5	65.54	50	29.57	20.27	14	26	14	37.4	54.3	94.5	5.54	9.64	0.05~0.11	0.37
MMSG3-25R MMSG3-25L				R L	20	55	75	78.78	60	35.6	24.39	17	31	17	43.92	94.5	167	9.64	17.0	0.06~0.12	0.65
MMSG3.5-25R MMSG3.5-25L				R L	25	65	87.5	91.81	70	41.65	28.41	19	37	20	52.43	151	270	15.4	27.5	0.07~0.13	1.04
MMSG4-25R MMSG4-25L				R L	28	75	100	104.7	80	47.8	32.35	22	42	23	58.95	216	392	22.1	40.0	0.09~0.15	1.57
MMSG2-30R MMSG2-30L	1	30	B4	R L	14	45	60	62.42	50	29.27	21.21	15	26	12	38.06	38.5	78.6	3.93	8.02	0.04~0.10	0.36
MMSG2.5-30R MMSG2.5-30L				R L	16	55	75	78.04	60	34.08	24.02	16	30	15	47.57	75.3	156	7.68	16.0	0.05~0.11	0.66
MMSG3-30R MMSG3-30L				R L	20	65	90	93.61	70	40.25	26.8	18	36	20	55.43	139	294	14.2	30.0	0.06~0.12	1.11
MMSG3.5-30R MMSG3.5-30L				R L	25	80	105	109.21	80	44.4	29.6	20	40	22	67.77	204	436	20.8	44.5	0.07~0.13	1.75
MMSG4-30R MMSG4-30L				R L	28	90	120	124.7	90	49.27	32.35	22	44	25	77.29	303	657	30.9	67.0	0.09~0.15	2.49

Bore H7		* The product shapes of J Series items are identified by background color.																
Keyway Js9	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
Screw size	4 × 1.8		5 × 2.3			6 × 2.8				8 × 3.3			10 × 3.3		12 × 3.3	14 × 3.8		
Catalog Number	M4					M5				M6			M8			M10		
MMSG2-20R J BORE	B3K	B3K	B3K	B3K	B3K	B3K												
MMSG2-20L J BORE	B3K	B3K	B3K	B3K	B3K	B3K												
MMSG2.5-20R J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSG2.5-20L J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSG3-20R J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K								
MMSG3-20L J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K								
MMSG3.5-20R J BORE								B4K	B4K	B4K	B4K	B4K						
MMSG3.5-20L J BORE								B4K	B4K	B4K	B4K	B4K						
MMSG4-20R J BORE								B4K	B4K	B4K	B4K	B4K	B4K					
MMSG4-20L J BORE								B4K	B4K	B4K	B4K	B4K	B4K					
MMSG2-25R J BORE	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSG2-25L J BORE	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSG2.5-25R J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG2.5-25L J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG3-25R J BORE								B4K	B4K	B4K	B4K	B4K	B4K					
MMSG3-25L J BORE								B4K	B4K	B4K	B4K	B4K	B4K					
MMSG3.5-25R J BORE										B4K	B4K	B4K	B4K	B4K	B4K			
MMSG3.5-25L J BORE										B4K	B4K	B4K	B4K	B4K	B4K			
MMSG4-25R J BORE											B4K	B4K	B4K	B4K	B4K	B4K		
MMSG4-25L J BORE											B4K	B4K	B4K	B4K	B4K	B4K		
MMSG2-30R J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG2-30L J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG2.5-30R J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K					
MMSG2.5-30L J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K					
MMSG3-30R J BORE								B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSG3-30L J BORE								B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSG3.5-30R J BORE										B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSG3.5-30L J BORE										B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSG4-30R J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K	
MMSG4-30L J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K	




Specifications	
Precision grade	JIS B 1704: 1978 grade 2*
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.

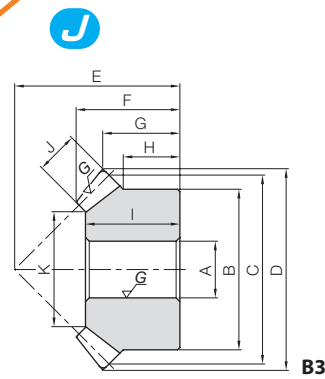


B3

J Series



B3T



B3K



To order J Series products, please specify: **Catalog No. + J + BORE.**





Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Mounting distance E	Total length F	Crown to back G	Hub width H	Hole length I	Face width J	Holding surface dia. K	Allowable torque (N·m) Bending strength	Allowable torque (kgf·m) Surface durability	Backlash (mm)	Weight (kg)					
SMSG1-20R SMSG1-20L	1	20	B3	R L	6 8	16 26	20 30	21.30 31.74	20 30	13.84 21.18	10.65 15.87	8 13	12 19	5 8	9.86 15.37	1.17 4.10	0.97 3.47	0.12 0.42	0.099 0.35	0.02~0.08 0.04~0.10	0.019 0.074			
SMSG2-20R SMSG2-20L				R L	12 14	34 42	40 50	42.4 52.94	37 48	24.75 32.42	18.2 24.47	14 19	22 29	10 12	21.72 28.06	7.83 14.9	6.79 13.2	0.80 1.52	0.69 1.35	0.05~0.11 0.06~0.12	0.15 0.30			
SMSG3-20R SMSG3-20L				R L	16 20	50 60	60 70	63.72 74.47	58 65	39.6 43.81	29.86 32.23	23 25	35 40	15 18	31.57 39.09	26.4 42.6	23.7 38.8	2.69 4.35	2.42 3.96	0.07~0.13 0.08~0.14	0.52 0.82			
SMSG3.5-20R SMSG3.5-20L				R L	20 25	60 80	70 100	74.47 105.9	65 90	43.81 60.16	32.23 42.95	25 30	40 54	18 26	39.09 54.46	42.6 115	38.8 109	4.35 11.8	3.96 11.1	0.08~0.14 0.12~0.18	0.82 2.13			
SMSG4-20R SMSG4-20L				R L	20 25	64 80	80 100	84.88 105.9	75 90	50.51 60.16	37.44 42.95	27 30	45 54	20 26	43.43 54.46	62.6 115	57.8 109	6.39 11.8	5.90 11.1	0.10~0.16 0.12~0.18	1.15 2.13			
SMSG5-20R SMSG5-20L				R L	25 30	80 100	100 120	105.9 124.71	90 120	60.16 68.20	42.95 47.95	30 35	54 62	26 30	54.46 99.15	115 240	109 332	11.8 24.5	11.1 33.9	0.12~0.18 0.12~0.18	2.13 6.44			
SMSG1-25R SMSG1-25L				1	25	B3	R L	6 10	20 30	25 37.5	26.22 39.31	23 34	15.08 22.14	11.11 16.16	8 11.5	14 19	6 9	15.03 19.54	1.88 5.29	1.91 5.52	0.19 0.54	0.19 0.56	0.02~0.08 0.04~0.10	0.035 0.11
SMSG2-25R SMSG2-25L							R L	12 16	40 50	50 62.5	52.4 65.54	40 50	24.19 30.24	16.2 20.27	10 12.5	20 26	12 15	26.06 34.57	12.6 24.5	13.5 26.8	1.28 2.50	1.37 2.74	0.05~0.11 0.06~0.12	0.21 0.42
SMSG3-25R SMSG3-25L	R L	20 25	60 70				75 87.5	78.77 91.81	60 70	37.57 42.98	24.39 28.41	15 17.5	32 37	20 22	37.43 46.77	45.0 69.2	50.0 78.1	4.59 7.05	5.10 7.97	0.07~0.13 0.08~0.14	0.74 1.14			
SMSG3.5-25R SMSG3.5-25L	R L	25 30	70 80				87.5 100	91.81 104.7	70 80	42.98 49.14	28.41 32.35	17.5 20	37 43	22 25	46.77 55.29	69.2 95.0	78.1 109	7.05 9.68	7.97 11.1	0.08~0.14 0.10~0.16	1.14 1.71			
SMSG4-25R SMSG4-25L	R L	28 30	80 100				100 120	104.7 124.71	80 95	49.14 54.28	32.35 37.35	20 25	43 50	25 25	55.29 79.29	95.0 127	109 174	9.68 12.9	11.1 17.8	0.10~0.16 0.10~0.16	1.71 3.07			
SMSG5-25R SMSG5-25L	R L	30 35	100 120				120 150	124.71 155.90	95 120	54.28 68.20	37.35 47.95	25 35	50 62	25 30	79.29 99.15	127 240	174 332	12.9 24.5	17.8 33.9	0.10~0.16 0.12~0.18	3.07 6.44			
SMSG1-30R SMSG1-30L	1	30	B3				R L	8 10	24 36	30 45	31.26 46.84	28 43	17.61 28.11	13.63 21.42	10 16	16 25	6 10	19.03 25.72	2.50 7.53	3.02 9.35	0.25 0.77	0.31 0.95	0.02~0.08 0.04~0.10	0.057 0.21
SMSG2-30R SMSG2-30L							R L	12 16	45 60	60 75	62.42 78.04	50 62	29.27 36.08	21.21 26.02	12.5 17	25 32	12 15	36.06 47.57	16.7 32.6	21.4 42.7	1.70 3.32	2.18 4.36	0.05~0.11 0.06~0.12	0.37 0.76
SMSG3-30R SMSG3-30L				R L	20 25	70 90	90 105	93.61 109.21	75 85	45.25 49.4	31.8 34.6	20 25	40 45	20 22	53.43 67.77	60.3 85.1	80.4 115	6.15 8.68	8.20 11.8	0.07~0.13 0.08~0.14	1.32 2.19			
SMSG3.5-30R SMSG3.5-30L				R L	25 30	90 100	105 120	109.21 124.71	85 95	49.4 54.28	34.6 37.35	25 25	45 50	22 25	67.77 79.29	85.1 127	115 174	8.68 12.9	11.8 17.8	0.08~0.14 0.10~0.16	2.19 3.07			
SMSG4-30R SMSG4-30L				R L	28 30	100 120	120 150	124.71 155.90	95 120	54.28 68.20	37.35 47.95	25 35	50 62	25 30	79.29 99.15	127 240	174 332	12.9 24.5	17.8 33.9	0.10~0.16 0.12~0.18	3.07 6.44			
SMSG5-30R SMSG5-30L				R L	30 35	120 150	150 180	155.90 180	120 150	68.20 80	47.95 56	35 40	62 70	30 35	99.15 127	240 332	332 444	24.5 33.9	33.9 44.4	0.12~0.18 0.12~0.18	6.44 11.1			
SMSG1-35R SMSG1-35L				1	35	B3	R L	10 12	36 45	45 60	46.84 62.42	43 50	28.11 29.27	21.42 21.21	16 12.5	25 25	10 12	25.72 36.06	7.53 16.7	9.35 21.4	0.77 1.70	0.95 2.18	0.04~0.10 0.05~0.11	0.21 0.37
SMSG2-35R SMSG2-35L							R L	12 16	45 60	60 75	62.42 78.04	50 62	29.27 36.08	21.21 26.02	12.5 17	25 32	12 15	36.06 47.57	16.7 32.6	21.4 42.7	1.70 3.32	2.18 4.36	0.05~0.11 0.06~0.12	0.37 0.76
SMSG3-35R SMSG3-35L	1	35	B3	R L	20 25	70 90	90 105	93.61 109.21	75 85	45.25 49.4	31.8 34.6	20 25	40 45	20 22	53.43 67.77	60.3 85.1	80.4 115	6.15 8.68	8.20 11.8	0.07~0.13 0.08~0.14	1.32 2.19			
SMSG4-35R SMSG4-35L				R L	25 30	90 100	105 120	109.21 124.71	85 95	49.4 54.28	34.6 37.35	25 25	45 50	22 25	67.77 79.29	85.1 127	115 174	8.68 12.9	11.8 17.8	0.08~0.14 0.10~0.16	2.19 3.07			
SMSG5-35R SMSG5-35L	R L	30 35	100 120	120 150	124.71 155.90	95 120	54.28 68.20	37.35 47.95	25 35	50 62	25 30	79.29 99.15	127 240	174 332	12.9 24.5	17.8 33.9	0.10~0.16 0.12~0.18	3.07 6.44						

Bore H7		* The product shapes of J Series items are identified by background color.																			
Keyway J9		6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
Screw size		-		4 × 1.8		5 × 2.3				6 × 2.8				8 × 3.3			10 × 3.3		12 × 3.3	14 × 3.8	
Catalog Number		M4	M5	M4						M5				M6			M8			M10	
SMSG1-20R J BORE	B3T																				
SMSG1-20L J BORE	B3T																				
SMSG1.5-20R J BORE		B3T	B3K																		
SMSG1.5-20L J BORE		B3T	B3K																		
SMSG2-20R J BORE				B3K	B3K	B3K	B3K														
SMSG2-20L J BORE				B3K	B3K	B3K	B3K														
SMSG2.5-20R J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG2.5-20L J BORE					B3K	B3K															
SMSG3-20R J BORE							B3K	B3K	B3K	B3K	B3K	B3K									
SMSG3-20L J BORE							B3K	B3K	B3K	B3K	B3K	B3K	B3K								
SMSG3.5-20R J BORE												B3K	B3K	B3K	B3K	B3K					
SMSG3.5-20L J BORE												B3K	B3K								
SMSG4-20R J BORE												B3K	B3K	B3K	B3K	B3K	B3K	B3K			
SMSG4-20L J BORE												B3K	B3K	B3K	B3K	B3K	B3K	B3K			
SMSG5-20R J BORE														B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-20L J BORE														B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG1-25R J BORE	B3T	B3T																			
SMSG1-25L J BORE	B3T	B3T																			
SMSG1.5-25R J BORE			B3K	B3K	B3K																
SMSG1.5-25L J BORE			B3K	B3K	B3K																
SMSG2-25R J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K												
SMSG2-25L J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K												
SMSG2.5-25R J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K							
SMSG2.5-25L J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K							
SMSG3-25R J BORE												B3K	B3K	B3K	B3K						
SMSG3-25L J BORE												B3K	B3K	B3K	B3K						
SMSG3.5-25R J BORE														B3K	B3K	B3K	B3K	B3K			
SMSG3.5-25L J BORE														B3K	B3K	B3K	B3K	B3K			
SMSG4-25R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-25L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-25R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-25L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG1-30R J BORE		B3T	B3K	B3K																	
SMSG1-30L J BORE		B3T	B3K	B3K																	
SMSG1.5-30R J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K											
SMSG1.5-30L J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K											
SMSG2-30R J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K								
SMSG2-30L J BORE			B3K	B3K	B3K							B3K	B3K	B3K							
SMSG2.5-30R J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K				
SMSG2.5-30L J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K				
SMSG3-30R J BORE												B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K		
SMSG3-30L J BORE												B3K	B3K								
SMSG3.5-30R J BORE														B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG3.5-30L J BORE														B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-30R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-30L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-30R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-30L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	






Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC

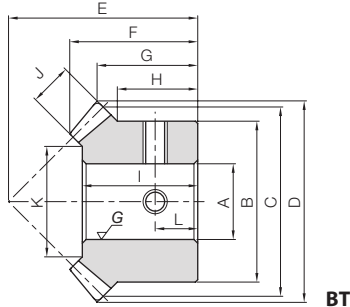

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
						A _{H7}	B	C	D	E	F	G	H	I
MMSA1-20R MMSB1-20R MMSA1-20L MMSB1-20L	1	m1	20	R	BT	8 10	17	20	21.29	20	13.53	10.64	8.5	12.2
L				8 10										
MMSA1.5-20R MMSB1.5-20R MMSA1.5-20L MMSB1.5-20L		m1.5		R	BT BK	10 12	25	30	31.9	28	18.48	13.95	10.5	16.5
L				10 12										
MMSA2-20R MMSB2-20R MMSA2-20L MMSB2-20L		m2		R		14 16	35	40	42.52	35	22.09	16.26	12.5	20
L				14 16										
MMSA2.5-20R MMSB2.5-20R MMSA2.5-20L MMSB2.5-20L		m2.5		R	BK	18 20	42	50	53.2	45	28.63	21.6	16	26
L				18 20										
MMSA3-20R MMSB3-20R MMSA3-20L MMSB3-20L		m3		R		20 22	52	60	63.99	50	30.78	21.99	16	27
L				20 22										
MMSA3.5-20R MMSB3.5-20R MMSA3.5-20L MMSB3.5-20L		m3.5		R		25 28	50	70	74.53	55	32.45	22.26	14	29
L				25 28										
MMSA4-20R MMSB4-20R MMSA4-20L MMSB4-20L		m4		R	B4	28 30	55	80	84.99	65	39.13	27.5	17	35
L				28 30										
MMSA5-20R MMSB5-20R MMSA5-20L MMSB5-20L		m5		R		30 35	70	100	106.25	75	42.99	28.13	17	38
L				30 35										
MMSA6-20R MMSB6-20R MMSA6-20L MMSB6-20L		m6		R		40 45	80	120	127.59	90	51.13	33.8	20	45
L				40 45										
MMSA8-20R MMSA8-20L		m8		R L	B7	80 80	—	160	—	100	45	29.16	—	40
MMSA10-20R MMSA10-20L		m10		R L		100 100	—	200	—	125	58	36.48	—	50


Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
J	K	Width × Depth	Size	L						
4.5	11.67	—	2-M4	4.5	2.24	2.09	0.23	0.21	0.03~0.13	MMSA1-20R MMSB1-20R MMSA1-20L MMSB1-20L
7	17.2	4 × 1.8		6	7.74	7.34	0.79	0.75	0.05~0.15	MMSA1.5-20R MMSB1.5-20R MMSA1.5-20L MMSB1.5-20L
9	24.54	5 × 2.3		7	18.0	17.3	1.83	1.76	0.06~0.16	MMSA2-20R MMSB2-20R MMSA2-20L MMSB2-20L
11	30.89	6 × 2.8	2-M5	8	34.6	33.7	3.52	3.44	0.07~0.17	MMSA2.5-20R MMSB2.5-20R MMSA2.5-20L MMSB2.5-20L
14	34.4				61.9	61.1	6.32	6.23	0.08~0.18	MMSA3-20R MMSB3-20R MMSA3-20L MMSB3-20L
16	42.75	8 × 3.3	2-M6	9	97.1	96.7	9.90	9.86	0.10~0.25	MMSA3.5-20R MMSB3.5-20R MMSA3.5-20L MMSB3.5-20L
18	49.08				144	144	14.6	14.7	0.12~0.27	MMSA4-20R MMSB4-20R MMSA4-20L MMSB4-20L
23	60.95				284	288	29.0	29.4	0.14~0.34	MMSA5-20R MMSB5-20R MMSA5-20L MMSB5-20L
27	73.63	12 × 3.3	2-M8	10	475	496	48.4	50.6	0.16~0.36	MMSA6-20R MMSB6-20R MMSA6-20L MMSB6-20L
		14 × 3.8	2-M10							
35	101	—	6-M10	110	1080	1170	111	119	0.20~0.45	MMSA8-20R MMSA8-20L
45	122.72			130	1660	1840	169	188	0.25~0.50	MMSA10-20R MMSA10-20L

When installing products produced in B7 style (ring type), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only.

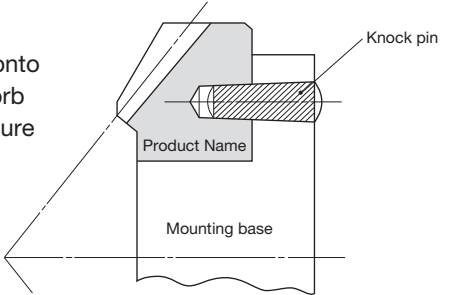



Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC
Surface treatment	Black oxide coating



Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back
						A _{H7}	B	C	D	E	F	G
MMS2-20R MMS2-20L	1	m2	20	R L	B3	12	34	40	42.31	35	22.14	16.15
MMS2.5-20R MMS2.5-20L		m2.5		R L		15	42	50	53.2	45	28.63	21.6
MMS3-20R MMS3-20L		m3		R L		16	52	60	63.99	50	30.78	21.99
MMS4-20R MMS4-20L		m4		R L		20	65	80	84.99	65	39.13	27.5
MMS5-20R MMS5-20L		m5		R L		25	85	100	106.25	75	42.99	28.13
MMS2-25R MMS2-25L	1	m2	25	R L	B3	12	45	50	52.4	40	24.19	16.2
MMS2.5-25R MMS2.5-25L		m2.5		R L		16	55	62.5	65.54	50	30.24	20.27
MMS3-25R MMS3-25L		m3		R L		20	65	75	78.77	60	37.57	24.39
MMS4-25R MMS4-25L		m4		R L		25	85	100	104.7	80	49.14	32.35
MMS5-25R MMS5-25L		m5		R L		28	100	125	130.86	100	60.59	40.43
MMS2-30R MMS2-30L	1	m2	30	R L	B3	12	45	60	62.42	50	29.27	21.21
MMS2.5-30R MMS2.5-30L		m2.5		R L		16	60	75	78.04	62	36.08	26.02
MMS3-30R MMS3-30L		m3		R L		20	70	90	93.61	75	45.25	31.8
MMS4-30R MMS4-30L		m4		R L		28	100	120	124.71	95	54.28	37.35
MMS5-30R MMS5-30L		m5		R L		28	130	150	155.9	120	68.2	47.95




Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
12	20	9	24.54	17.0	17.3	1.73	1.76	0.06~0.16	0.13	MMS2-20R MMS2-20L
16	26	11	30.89	32.7	33.7	3.34	3.44	0.07~0.17	0.26	MMS2.5-20R MMS2.5-20L
16	27	14	34.4	58.7	61.1	5.98	6.23	0.08~0.18	0.43	MMS3-20R MMS3-20L
17.5	35	18	49.08	136	144	13.9	14.7	0.12~0.27	0.92	MMS4-20R MMS4-20L
17.5	38	23	60.95	269	288	27.5	29.4	0.14~0.34	1.65	MMS5-20R MMS5-20L
12.5	21	12	28.06	29.1	36.3	2.96	3.70	0.06~0.16	0.25	MMS2-25R MMS2-25L
15	27	15	36.57	56.7	71.8	5.79	7.32	0.07~0.17	0.47	MMS2.5-25R MMS2.5-25L
17.5	33	20	39.43	104	133	10.6	13.6	0.08~0.18	0.81	MMS3-25R MMS3-25L
22.5	44	25	57.29	238	309	24.3	31.5	0.12~0.27	1.88	MMS4-25R MMS4-25L
25	50	30	65.15	454	595	46.3	60.7	0.14~0.34	3.39	MMS5-25R MMS5-25L
12.5	25	12	36.06	42.4	57.1	4.32	5.82	0.06~0.16	0.37	MMS2-30R MMS2-30L
17	32	15	47.57	82.8	113	8.44	11.5	0.07~0.17	0.76	MMS2.5-30R MMS2.5-30L
20	40	20	53.43	153	211	15.6	21.5	0.08~0.18	1.32	MMS3-30R MMS3-30L
25	50	25	79.29	348	488	35.5	49.8	0.12~0.27	3.07	MMS4-30R MMS4-30L
35	62	30	99.15	662	941	67.5	96.0	0.14~0.34	6.44	MMS5-30R MMS5-30L





Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.





To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash	Weight
					AH7	B	C	D	E	F	G	H	I	J	K	Bending strength	Surface durability	Bending strength	Surface durability	(mm)	(kg)
SMS1-20R SMS1-20L	1	20	B3	R L	6	16	20	21.3	20	13.84	10.65	8	12	5	9.86	1.07	0.65	0.11	0.067	0.03~0.13	0.019
SMS1.5-20R SMS1.5-20L				R L	8	26	30	31.74	30	21.18	15.87	13	19	8	15.37	3.73	2.33	0.38	0.24	0.05~0.15	0.074
SMS2-20R SMS2-20L				R L	12	34	40	42.4	37	24.75	18.2	14	22	10	21.72	8.54	5.40	0.87	0.55	0.06~0.16	0.15
SMS2.5-20R SMS2.5-20L				R L	14	42	50	52.94	48	32.42	24.47	19	29	12	28.06	16.3	10.5	1.66	1.07	0.07~0.17	0.30
SMS3-20R SMS3-20L				R L	16	50	60	63.72	58	39.6	29.86	23	35	15	31.57	28.8	18.7	2.94	1.91	0.08~0.18	0.52
SMS3.5-20R SMS3.5-20L				R L	20	60	70	74.47	65	43.81	32.23	25	40	18	39.09	46.5	30.4	4.74	3.10	0.10~0.25	0.82
SMS4-20R SMS4-20L				R L	20	64	80	84.88	75	50.51	37.44	27	45	20	43.43	68.3	45.0	6.97	4.59	0.12~0.27	1.15
SMS5-20R SMS5-20L				R L	25	80	100	105.9	90	60.16	42.95	30	54	26	54.46	136	90.9	13.9	9.27	0.14~0.34	2.13
SMS6-20R SMS6-20L				R L	28	100	120	127.16	104	67.35	47.58	34	60	30	67.15	226	155	23.0	15.8	0.16~0.36	3.65
SMS8-20R SMS8-20L				R L	30	130	160	169.94	125	72.6	49.97	30	62	35	95	484	344	49.4	35.1	0.20~0.45	7.00
SMS1-25R SMS1-25L	1	25	B3	R L	6	20	25	26.22	23	15.08	11.11	8	14	6	15.03	1.71	1.28	0.17	0.13	0.03~0.13	0.035
SMS1.5-25R SMS1.5-25L				R L	10	30	37.5	39.31	34	22.14	16.16	11.5	19	9	19.54	5.78	4.42	0.59	0.45	0.05~0.15	0.11
SMS2-25R SMS2-25L				R L	12	40	50	52.38	40	24.2	16.19	10	20	12	26.06	13.7	10.7	1.40	1.09	0.06~0.16	0.21
SMS2.5-25R SMS2.5-25L				R L	16	50	62.5	65.54	50	30.24	20.27	12.5	26	15	34.57	26.8	21.1	2.73	2.15	0.07~0.17	0.42
SMS3-25R SMS3-25L				R L	20	60	75	78.77	60	37.57	24.39	15	32	20	37.43	49.1	39.1	5.00	3.98	0.08~0.18	0.74
SMS3.5-25R SMS3.5-25L				R L	25	70	87.5	91.81	70	42.98	28.41	17.5	37	22	46.77	75.4	60.6	7.69	6.18	0.10~0.25	1.14
SMS4-25R SMS4-25L				R L	28	80	100	104.7	80	49.14	32.35	20	43	25	55.29	112	90.7	11.5	9.25	0.12~0.27	1.71
SMS5-25R SMS5-25L				R L	28	100	125	130.86	100	60.59	40.43	25	50	30	65.15	214	175	21.8	17.8	0.14~0.34	3.39
SMS6-25R SMS6-25L				R L	28	120	150	157.17	120	71.97	48.58	30	61	35	83	357	300	36.4	30.6	0.16~0.36	5.99
SMS1-30R SMS1-30L				1	30	B3	R L	8	24	30	31.26	28	17.61	13.63	10	16	6	19.03	2.28	2.03	0.23
SMS1.5-30R SMS1.5-30L	R L	10	36				45	46.84	43	28.11	21.42	16	25	10	25.72	8.22	7.48	0.84	0.76	0.05~0.15	0.21
SMS2-30R SMS2-30L	R L	12	45				60	62.42	50	29.27	21.21	12.5	25	12	36.06	18.2	16.9	1.86	1.72	0.06~0.16	0.37
SMS2.5-30R SMS2.5-30L	R L	16	60				75	78.04	62	36.08	26.02	17	32	15	47.57	35.6	33.4	3.63	3.40	0.07~0.17	0.76
SMS3-30R SMS3-30L	R L	20	70				90	93.61	75	45.25	31.8	20	40	20	53.43	65.8	62.3	6.71	6.35	0.08~0.18	1.32
SMS3.5-30R SMS3.5-30L	R L	25	90				105	109.21	85	49.4	34.6	25	45	22	67.77	101	96.0	10.3	9.79	0.10~0.25	2.19
SMS4-30R SMS4-30L	R L	28	100				120	124.71	95	54.28	37.35	25	50	25	79.29	150	144	15.3	14.7	0.12~0.27	3.07
SMS5-30R SMS5-30L	R L	28	130				150	155.90	120	68.2	47.95	35	62	30	99.15	284	276	29.0	28.1	0.14~0.34	6.44

[illegible]



Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	—
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
					AH7	B	C	D	E	F	G	H	I
SMA1-20 SMB1-20	1	m1	20	BT	8	16	20	21.41	20	13.95	10.71	8	12
SMA1.5-20 SMB1.5-20		m1.5		BT BK	10 12	26	30	32.12	30	21.24	16.06	13	19
SMA2-20 SMB2-20		m2		BK	14 15	34	40	42.83	37	24.89	18.41	14	22
SMA2.5-20 SMB2.5-20		m2.5			18 20	42	50	53.54	48	32.54	24.77	19	29
SMA3-20 SMB3-20 SMC3-20		m3			22 25 20	50	60	64.24	58	39.84	30.12	23	35
SMA4-20 SMB4-20 SMC4-20		m4			30 32 25	64	80	85.65	75	50.78	37.83	27	45
SMA5-20 SMB5-20 SMC5-20		m5			40 30 35	80	100	107.07	90	60.38	43.54	30	54
SMA1-25 SMA1.5-25	1	m1 m1.5	25	BT	10 12	20 30	25 37.5	26.41 39.62	23 34	15.16 22.25	11.21 16.31	8 11.5	14 19
SMA2-25 SMB2-25		m2		BK	18 15	40	50	52.83	40	24.33	16.41	10	20
SMA2.5-25 SMB2.5-25		m2.5			20 18	50	62.5	66.04	50	30.41	20.52	12.5	26
SMA3-25 SMB3-25		m3			30 25	60	75	79.24	60	37.81	24.62	15	32
SMA4-25 SMB4-25		m4			35 30	80	100	105.66	80	49.32	32.83	20	43
SMA5-25		m5			50	100	125	132.07	100	60.82	41.04	25	50
SMA1-30 SMA1.5-30		m1 m1.5	30	BK	12 15	24 36	30 45	31.41 47.12	28 43	17.71 28.24	13.71 21.56	10 16	16 25
SMA2-30 SMB2-30		m2			20 15	45	60	62.83	50	29.42	21.41	12.5	25
SMA2.5-30 SMB2.5-30		m2.5			25 20	60	75	78.54	62	36.28	26.27	17	32
SMA3-30 SMB3-30		m3			32 25	70	90	94.24	75	45.47	32.12	20	40
SMA4-30 SMB4-30		m4			40 30	100	120	125.66	95	54.52	37.83	25	50
SMA5-30		m5			55	130	150	157.07	120	68.56	48.54	35	62

Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
J	K	Width × Depth	Size	L						
5	9.86 10	—	M4	4	0.90	0.37	0.091	0.038	0.03~0.13	SMA1-20 SMB1-20
8	15.37	4 x 1.8	M4 M5	6.5	3.13	1.31	0.32	0.13	0.05~0.15	SMA1.5-20 SMB1.5-20
10	21.72	5 x 2.3 5 x 2.3	M5	7	7.17	3.05	0.73	0.31	0.06~0.16	SMA2-20 SMB2-20
12	28.06	5 x 2.3* 6 x 2.8	M6	9.5	13.7	5.90	1.39	0.60	0.07~0.17	SMA2.5-20 SMB2.5-20
15	31.57	7 x 3* 7 x 3* 6 x 2.8	M6 M8 M6	11.5	24.2	10.5	2.47	1.08	0.08~0.18	SMA3-20 SMB3-20 SMC3-20
20	43.43	7 x 3* 10 x 3.3 8 x 3.3	M8	13.5	57.3	25.4	5.85	2.59	0.12~0.27	SMA4-20 SMB4-20 SMC4-20
26	54.46	10 x 3.3* 8 x 3.3 10 x 3.3	M8	15	114	51.3	11.7	5.23	0.14~0.34	SMA5-20 SMB5-20 SMC5-20
6	15.03	—	M4	4	1.48	0.71	0.15	0.072	0.03~0.13	SMA1-25
9	19.54	4 x 1.8	M5	5.75	4.98	2.44	0.51	0.25	0.05~0.15	SMA1.5-25
12	26.06	6 x 2.8 5 x 2.3	M6 M5	5	11.8	5.90	1.20	0.60	0.06~0.16	SMA2-25 SMB2-25
15	34.57	5 x 2.3* 6 x 2.8	M6	6	23.1	11.7	2.35	1.19	0.07~0.17	SMA2.5-25 SMB2.5-25
20	37.43	7 x 3* 8 x 3.3	M8	7.5	42.3	21.6	4.31	2.20	0.08~0.18	SMA3-25 SMB3-25
25	55.29	10 x 3.3 8 x 3.3	M8	10	96.8	50.2	9.87	5.12	0.12~0.27	SMA4-25 SMB4-25
30	65.15	12 x 3.3*	M8	12.5	185	96.8	18.8	9.87	0.14~0.34	SMA5-25
6	19.03	4 x 1.8	M5	5	2.00	1.11	0.20	0.11	0.03~0.13	SMA1-30
10	25.71	5 x 2.3	M5	8	7.22	4.08	0.74	0.42	0.05~0.15	SMA1.5-30
12	36.06	6 x 2.8 5 x 2.3	M6 M5	6.25	16.0	9.20	1.63	0.94	0.06~0.16	SMA2-30 SMB2-30
15	47.57	8 x 3.3 6 x 2.8	M8 M6	8.5	31.2	18.2	3.19	1.86	0.07~0.17	SMA2.5-30 SMB2.5-30
20	53.43	10 x 3.3 8 x 3.3	M8	10	57.8	34.0	5.89	3.46	0.08~0.18	SMA3-30 SMB3-30
25	79.29	12 x 3.3 8 x 3.3	M8	12.5	131	78.3	13.4	7.99	0.12~0.27	SMA4-30 SMB4-30
30	99.15	16 x 4.3	M10	17.5	250	150	25.5	15.3	0.14~0.34	SMA5-30






MM Module 2~5 Miter Gears **NEW**




Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.



B3

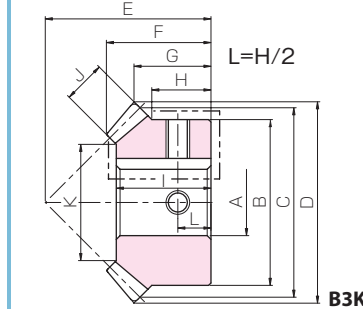

B3K



To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	Gear Ratio	No. of teeth	Shape	Specifications																Backlash (mm)	Weight (kg)
				Bore		Hub dia.	Pitch dia.	Outside dia.	Rooting dia.	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)			
				A _{H7}	B	C	D	E	F	G	H	I	J	K	Bending strength	Surface durability	Bending strength	Surface durability			
MM2-20	1	20	B3	12	34	40	42.83	35	22.24	16.41	12	20	9	24.54	15.1	9.74	1.54	0.99	0.06~0.16	0.13	
MM2.5-20				15	42	50	53.54	45	28.89	21.77	16	26	11	30.89	29.0	19.0	2.96	1.94	0.07~0.17	0.27	
MM3-20				16	52	60	64.24	50	31.19	22.12	16	27	14	34.4	52.0	34.5	5.30	3.52	0.08~0.18	0.43	
MM4-20				20	65	80	85.66	65	39.49	27.83	17.5	35	18	49.09	121	81.2	12.3	8.28	0.12~0.27	0.93	
MM5-20				25	80	100	107.07	90	60.38	43.54	30	54	26	54.46	256	175	26.1	17.8	0.14~0.34	2.15	
MM2-25	1	25	B3	12	45	50	52.83	40	24.33	16.41	12.5	21	12	28.06	26.4	20.1	2.70	2.05	0.06~0.16	0.25	
MM2.5-25				16	55	62.5	66.03	50	30.41	20.52	15	27	15	36.57	51.6	39.7	5.27	4.05	0.07~0.17	0.47	
MM3-25				20	65	75	79.24	60	37.81	24.62	17.5	33	20	39.43	94.7	73.5	9.66	7.49	0.08~0.18	0.81	
MM4-25				25	85	100	105.66	80	49.32	32.83	22.5	44	25	57.29	217	171	22.1	17.4	0.12~0.27	1.89	
MM5-25				28	100	125	132.07	100	60.82	41.04	25	50	30	65.15	413	329	42.1	33.6	0.14~0.34	3.41	
MM2-30	1	30	B3	12	45	60	62.83	50	29.43	21.41	12.5	25	12	36.06	35.7	31.1	3.64	3.17	0.06~0.16	0.37	
MM2.5-30				16	60	75	78.54	62	36.28	26.27	17	32	15	47.57	69.7	61.5	7.11	6.27	0.07~0.17	0.76	
MM3-30				20	70	90	94.24	75	45.47	32.12	20	40	20	53.43	129	115	13.2	11.7	0.08~0.18	1.32	
MM4-30				28	100	120	125.66	95	54.52	37.83	25	50	25	79.29	293	266	29.9	27.1	0.12~0.27	3.09	
MM5-30				28	130	150	157.07	120	68.56	48.54	35	62	30	99.15	558	513	56.9	52.3	0.14~0.34	6.47	



LM Module 0.8~1.5 Sintered Metal Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 5
Gear teeth	Gleason
Pressure angle	20°
Material	SMF5040
Heat treatment	—
Tooth hardness	(70 to 95HRB)



B1



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Specifications							
					A _{H8}	B	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width
LM0.8-20	1	m0.8	20	B1	4	12	16	17.13	16	11	8.57	5.5
LM1-20		m1			5	16	20	21.41	20	13.5	10.71	6
LM1.25-20		m1.25			6	22	25	26.77	23	15	11.38	6
LM1.5-20		m1.5			6	26	30	32.12	30	21	16.06	9

Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (g)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
11	4.24	—	0.22	0.027	0.022	0.0027	0~0.16	9.67	LM0.8-20
13.5	4.95		0.41	0.050	0.042	0.0051	0~0.18	20.7	LM1-20
15	6.36		0.81	0.099	0.083	0.010	0~0.20	38.8	LM1.25-20
21	8.48		1.48	0.19	0.15	0.019	0~0.22	78.6	LM1.5-20



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

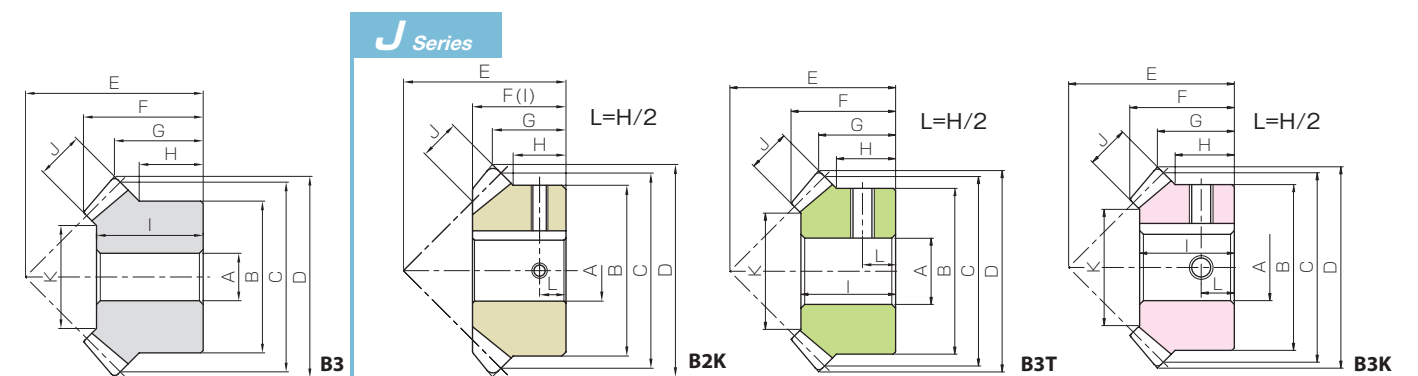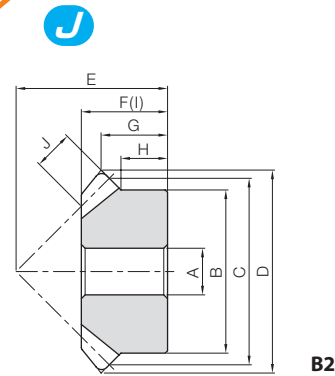

To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	Gear Ratio	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Root fillet radius	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash	Weight
				A _{H7}	B	C	D	E	F	G	H	I	J	K	Bending strength	Surface durability	Bending strength	Surface durability	(mm)	(kg)
SM2-16 SM2.5-16 SM3-16 SM4-16 SM5-16	1	16	B2	10	27	32	34.83	30	19	15.41	11.5	19	7	—	3.84	0.33	0.39	0.034	0.06~0.16	0.076
12				34	40	43.53	35	21	16.77	12	21	9	7.63		0.68	0.78	0.069	0.07~0.17	0.14	
14				42	48	52.24	40	23	18.12	13	23	11	13.3		1.21	1.36	0.12	0.08~0.18	0.22	
16				55	64	69.66	50	28	20.83	13.5	28	14	30.7		2.87	3.13	0.29	0.12~0.27	0.49	
20				70	80	87.07	65	37	28.54	20	37	17	58.9		5.62	6.00	0.57	0.14~0.34	1.03	
SM1-20 SM1.25-20 SM1.5-20 SM2-20 SM2.5-20	1	20	B3	6	16	20	21.41	20	13.94	10.71	8	12	5	9.86	0.89	0.084	0.091	0.0086	0.03~0.13	0.019
8				22	25	26.77	23	15.27	11.38	9	13	6	13.03	1.70	0.16	0.17	0.017	0.04~0.14	0.036	
8				26	30	32.12	30	21.24	16.06	13	19	8	15.37	3.12	0.30	0.32	0.031	0.05~0.15	0.074	
12				34	40	42.83	37	24.89	18.41	14	22	10	21.72	7.13	0.72	0.73	0.073	0.06~0.16	0.15	
14				42	50	53.54	48	32.54	24.77	19	29	12	28.06	13.6	1.41	1.39	0.14	0.07~0.17	0.30	
SM3-20 SM3.5-20 SM4-20 SM5-20 SM6-20 SM8-20			B3	16	50	60	64.24	58	39.84	30.12	23	35	15	31.57	24.1	2.54	2.45	0.26	0.08~0.18	0.53
20				60	70	74.95	65	44.13	32.47	25	40	18	39.09	38.8	4.15	3.96	0.42	0.10~0.25	0.82	
20				64	80	85.65	75	50.78	37.83	27	45	20	43.43	57.0	6.19	5.82	0.63	0.12~0.27	1.15	
25				80	100	107.07	90	60.38	43.54	30	54	26	54.46	114	12.6	11.6	1.29	0.14~0.34	2.15	
28				100	120	128.48	104	67.67	48.24	34	60	30	67.15	191	21.8	19.4	2.22	0.16~0.36	3.68	
30	130	160	171.31	125	73.33	50.66	30	62	35	95	413	49.6	42.1	5.06	0.20~0.45	7.05				
SM1-25 SM1.25-25 SM1.5-25 SM2-25 SM2.5-25	1	25	B3	6	20	25	26.41	23	15.16	11.21	8	14	6	15.03	1.47	0.16	0.15	0.017	0.03~0.13	0.035
8				25	31.25	33.02	28	17.88	13.26	9.25	16	7	18.7	2.75	0.31	0.28	0.032	0.04~0.14	0.063	
10				30	37.5	39.62	34	22.25	16.31	11.5	19	9	19.54	4.96	0.57	0.51	0.059	0.05~0.15	0.11	
12				40	50	52.83	40	24.33	16.41	10	20	12	26.06	11.8	1.41	1.20	0.14	0.06~0.16	0.22	
16				50	62.5	66.04	50	30.41	20.52	12.5	26	15	34.57	23.0	2.81	2.34	0.29	0.07~0.17	0.42	
SM3-25 SM3.5-25 SM4-25 SM5-25 SM6-25			B3	20	60	75	79.24	60	37.81	24.62	15	32	20	37.43	42.1	5.24	4.29	0.53	0.08~0.18	0.74
25				70	87.5	92.45	70	43.23	28.72	17.5	37	22	46.77	64.7	8.19	6.60	0.83	0.10~0.25	1.15	
28				80	100	105.66	80	49.32	32.83	20	43	25	55.29	96.3	12.4	9.82	1.26	0.12~0.27	1.73	
28				100	125	132.07	100	60.82	41.04	25	50	30	65.15	184	24.2	18.7	2.47	0.14~0.34	3.41	
28				120	150	158.48	120	72.32	49.24	30	61	35	83	309	42.1	31.5	4.29	0.16~0.36	6.03	
SM1-30 SM1.25-30 SM1.5-30 SM2-30 SM2.5-30	1	30	B3	8	24	30	31.41	28	17.71	13.71	10	16	6	19.03	1.99	0.26	0.20	0.026	0.03~0.13	0.057
10				30	37.5	39.27	36	23.47	18.13	13.5	21	8	22.37	4.05	0.54	0.41	0.055	0.04~0.14	0.12	
10				36	45	47.12	43	28.24	21.56	16	25	10	25.71	7.19	0.97	0.73	0.099	0.05~0.15	0.21	
12				45	60	62.83	50	29.42	21.41	12.5	25	12	36.06	15.9	2.22	1.62	0.23	0.06~0.16	0.37	
16				60	75	78.54	62	36.28	26.27	17	32	15	47.57	31.1	4.43	3.17	0.45	0.07~0.17	0.76	
SM3-30 SM3.5-30 SM4-30 SM5-30				B3	20	70	90	94.24	75	45.47	32.12	20	40	20	53.43	57.5	8.33	5.87	0.85	0.08~0.18
25	90	105	109.95		85	49.66	34.97	25	45	22	67.77	88.0	13.0	8.97	1.32	0.10~0.25	2.20			
28	100	120	125.66		95	54.52	37.83	25	50	25	79.29	131	19.6	13.3	2.00	0.12~0.27	3.09			
28	130	150	157.07		120	68.56	48.54	35	62	30	99.15	249	38.3	25.4	3.91	0.14~0.34	6.47			

[illegible]




Shaft angle 45°


Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

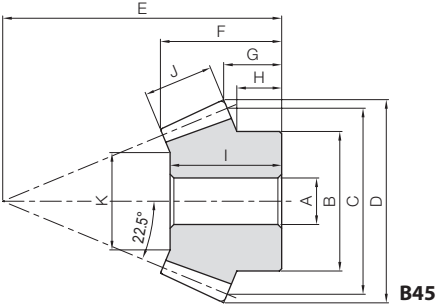

B45

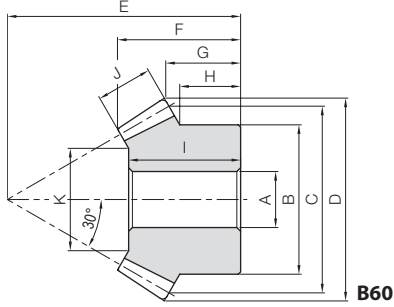

B60

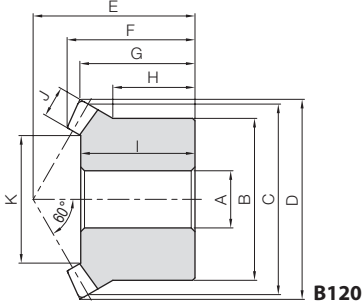

B120

Catalog Number	Gear Ratio	Module	No. of teeth	Shaft angle	Shape	Bore						
						A _{H7}	B	C	D	E	F	G
SAM1.5-20045	1	m1.5	20	45°	B45	8	25	30	32.77	45	19.33	9.36
SAM2-20045		m2				10	30	40	43.69	60	26.08	12.48
SAM2.5-20045		m2.5				12	40	50	54.62	75	31.92	15.6
SAM3-20045		m3				14	50	60	65.54	90	38.66	18.72
SAM1.5-20060	1	m1.5	20	60°	B60	8	25	30	32.59	40	22.3	14.77
SAM2-20060		m2				12	32	40	43.46	50	26.39	16.36
SAM2.5-20060		m2.5				14	40	50	54.33	60	30.49	17.94
SAM3-20060		m3				16	50	60	65.19	70	34.59	19.54
SAM1.5-20120	1	m1.5	20	120°	B120	8	26	30	31.5	26	20.69	18.64
SAM2-20120		m2				12	34	40	42	34	26.86	24.18
SAM2.5-20120		m2.5				14	42	50	52.5	42	33.22	29.73
SAM3-20120		m3				16	50	60	63	50	39.39	35.28

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
7.75	18	11	17	4.30	0.38	0.44	0.039	0.05~0.15	0.067	SAM1.5-20045 SAM2-20045 SAM2.5-20045 SAM3-20045
9.65	24	15	20.92	10.3	0.95	1.05	0.097	0.06~0.16	0.15	
12.58	30	18	30.07	19.6	1.85	2.00	0.19	0.07~0.17	0.31	
15.51	36	22	34	34.4	3.30	3.51	0.34	0.08~0.18	0.55	
12.58	21	9	18.18	3.54	0.32	0.36	0.033	0.05~0.15	0.077	SAM1.5-20060 SAM2-20060 SAM2.5-20060 SAM3-20060
13.05	24	12	21.93	8.39	0.78	0.86	0.080	0.06~0.16	0.15	
13.82	28	15	29.15	16.4	1.56	1.67	0.16	0.07~0.17	0.27	
15.16	32	18	36.36	28.3	2.74	2.89	0.28	0.08~0.18	0.47	
13.88	18	5	19.22	2.43	0.29	0.25	0.030	0.05~0.15	0.073	SAM1.5-20120 SAM2-20120 SAM2.5-20120 SAM3-20120
17.26	24	6.5	26.78	5.66	0.70	0.58	0.072	0.06~0.16	0.16	
20.64	29	8.5	32.03	11.4	1.45	1.16	0.15	0.07~0.17	0.31	
24.02	35	10	39.59	19.4	2.53	1.98	0.26	0.08~0.18	0.53	

Product Precautions



Page 306




Shaft angle 60°




Shaft angle 120°

Angular Miter Gear Box Example

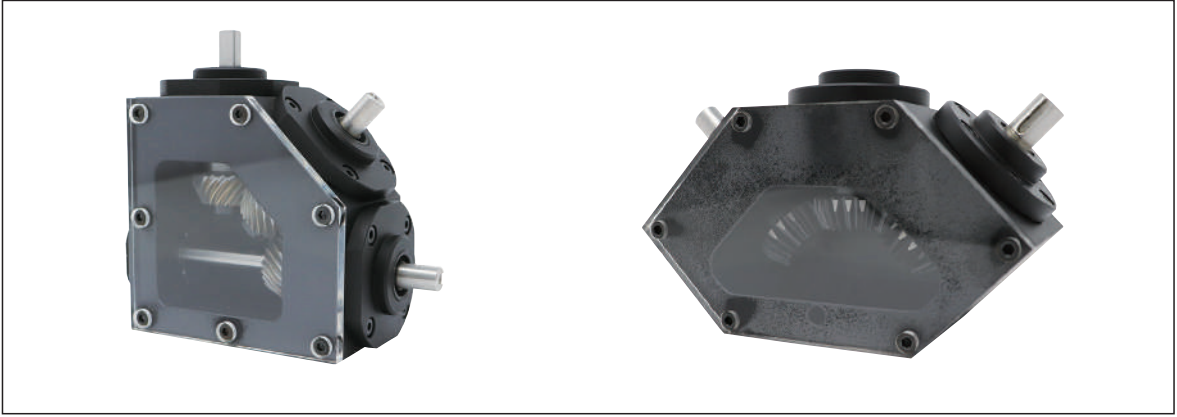

Angular miter

The axis angle of a normal miter is set to 90°, but the angle is set arbitrarily for the angular miter. The SAM Angular Miters are products with standardized axial angles of 45°, 60° and 120°. Be sure to pair products with the same model number. Custom items of other shaft angles are available, but may not be manufacturable due to the capabilities of the machine.

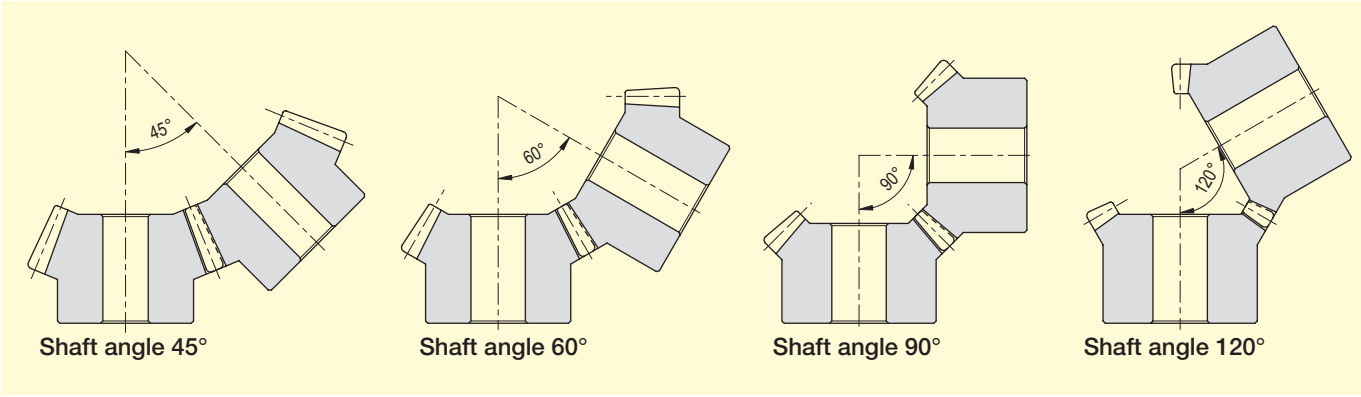




Stainless Steel Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width
					A _{H7}	B	C	D	E	F	G	H
SUM1-20	1	m1	20	B3	6	16	20	21.41	20	13.95	10.71	8
SUM1.5-20		m1.5			8	26	30	32.12	30	21.24	16.06	13
SUM2-20		m2			12	34	40	42.83	37	24.89	18.41	14
SUM2.5-20		m2.5			14	42	50	53.54	48	32.54	24.77	19
SUM3-20		m3			16	50	60	64.24	58	39.84	30.12	23
SUM4-20		m4			20	64	80	85.65	75	50.78	37.83	27
SUM1-25	1	m1	25	B3	6	20	25	26.41	23	15.16	11.21	8
SUM1.5-25		m1.5			10	30	37.5	39.62	34	22.25	16.31	11.5
SUM2-25		m2			12	45	50	52.83	40	24.33	16.41	12.5
SUM2.5-25		m2.5			16	55	62.5	66.04	50	30.41	20.52	15
SUM3-25		m3			20	65	75	79.24	60	37.81	24.62	17.5
SUM4-25		m4			28	80	100	105.66	80	49.32	32.83	20
SUM1-30	1	m1	30	B3	8	24	30	31.41	28	17.71	13.71	10
SUM1.5-30		m1.5			10	36	45	47.12	43	28.24	21.56	16
SUM2-30		m2			12	45	60	62.83	50	29.43	21.41	12.5
SUM2.5-30		m2.5			16	60	75	78.54	62	36.28	26.27	17
SUM3-30		m3			20	70	90	94.24	75	45.47	32.12	20


Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
12	5	9.86	0.49	0.060	0.050	0.0061	0.03~0.13	0.019	SUM1-20 SUM1.5-20 SUM2-20 SUM2.5-20 SUM3-20 SUM4-20
19	8	15.37	1.72	0.22	0.18	0.022	0.05~0.15	0.075	
22	10	21.72	3.94	0.51	0.40	0.052	0.06~0.16	0.15	
29	12	28.06	7.52	1.00	0.77	0.10	0.07~0.17	0.30	
35	15	31.57	13.3	1.80	1.36	0.18	0.08~0.18	0.53	
45	20	43.43	31.5	4.39	3.22	0.45	0.12~0.27	1.17	
14	6	15.03	0.81	0.12	0.083	0.012	0.03~0.13	0.035	SUM1-25 SUM1.5-25 SUM2-25 SUM2.5-25 SUM3-25 SUM4-25
19	9	19.54	2.74	0.41	0.28	0.042	0.05~0.15	0.11	
20	12	26.06	6.50	1.00	0.66	0.10	0.06~0.16	0.25	
26	15	34.57	12.7	2.00	1.29	0.20	0.07~0.17	0.47	
32	20	37.43	23.3	3.73	2.37	0.38	0.08~0.18	0.81	
43	25	55.29	53.2	8.79	5.43	0.90	0.12~0.27	1.75	
16	6	19.03	1.10	0.18	0.11	0.02	0.03~0.13	0.058	SUM1-30 SUM1.5-30 SUM2-30 SUM2.5-30 SUM3-30
25	10	25.72	3.96	0.68	0.40	0.07	0.05~0.15	0.21	
25	12	36.06	8.77	1.55	0.89	0.16	0.06~0.16	0.37	
32	15	47.57	17.1	3.10	1.75	0.32	0.07~0.17	0.77	
40	20	53.43	31.7	5.86	3.23	0.60	0.08~0.18	1.34	




Finished Bore Stainless Steel Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
					A _{H7}	B	C	D	E	F	G	H	I
SUMA1-20	1	m1	20	BT	6	16	20	21.41	20	13.95	10.71	8	12
SUMA1.5-20		m1.5		BT	8	26	30	32.12	30	21.24	16.06	13	19
SUMA2-20		m2		BK	12	34	40	42.83	37	24.89	18.41	14	22
SUMA2.5-20		m2.5		BK	14	42	50	53.54	48	32.54	24.77	19	29
SUMA3-20		m3		BK	16	50	60	64.24	58	39.84	30.12	23	35
SUMA4-20		m4		BK	20	64	80	85.65	75	50.78	37.83	27	45
SUMA1-25	1	m1	25	BT	6	20	25	26.41	23	15.16	11.21	8	14
SUMA1.5-25		m1.5		BT	10	30	37.5	39.62	34	22.25	16.31	11.5	19
SUMA2-25		m2		BK	12	45	50	52.83	40	24.33	16.41	12.5	20
SUMA2.5-25		m2.5		BK	16	55	62.5	66.04	50	30.41	20.52	15	26
SUMA3-25		m3		BK	20	65	75	79.24	60	37.81	24.62	17.5	32
SUMA4-25		m4		BK	30	80	100	105.66	80	49.32	32.83	20	43




Face width	Holding surface dia.	Keyway		Socket head screw		Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
		Width × Depth	Size	L		Bending strength	Surface durability	Bending strength	Surface durability			
5	9.86	—	M4	4		0.49	0.060	0.050	0.0061	0.03~0.13	0.018	SUMA1-20 SUMA1.5-20 SUMA2-20 SUMA2.5-20 SUMA3-20 SUMA4-20
8	15.37	—	M4	6.5		1.72	0.22	0.18	0.022	0.05~0.15	0.074	
10	21.72	4 x 1.8	M4	7		3.94	0.51	0.40	0.052	0.06~0.16	0.15	
12	28.06	5 x 2.3	M5	9.5		7.52	1.00	0.77	0.10	0.07~0.17	0.30	
15	31.57	5 x 2.3	M5	11.5		13.3	1.80	1.36	0.18	0.08~0.18	0.53	
20	43.43	6 x 2.8	M5	13.5		31.5	4.39	3.22	0.45	0.12~0.27	1.16	
6	15.03	—	M4	4		0.81	0.12	0.083	0.012	0.03~0.13	0.034	SUMA1-25 SUMA1.5-25 SUMA2-25 SUMA2.5-25 SUMA3-25 SUMA4-25
9	19.54	—	M4	6		2.74	0.41	0.28	0.042	0.05~0.15	0.11	
12	26.06	4 x 1.8	M4	6.5		6.50	1.00	0.66	0.10	0.06~0.16	0.25	
15	34.57	5 x 2.3	M5	7.5		12.7	2.00	1.29	0.20	0.07~0.17	0.47	
20	37.43	6 x 2.8	M5	9		23.3	3.73	2.37	0.38	0.08~0.18	0.81	
25	55.29	8 x 3.3	M6	10		53.2	8.79	5.43	0.90	0.12~0.27	1.70	





Specifications	
Precision grade	JIS B 1704: 1978 grade 4*
Gear teeth	Gleason
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width
					A-H8	B	C	D	E	F	G	H
PM1-20	1	m1	20	B3	6	16	20	21.41	20	13.95	10.71	8
PM1.25-20		m1.25			8	22	25	26.77	23	15.27	11.38	9
PM1.5-20		m1.5			8	26	30	32.12	30	21.24	16.06	13
PM2-20		m2			10	34	40	42.83	37	24.89	18.41	14
PM2.5-20		m2.5			12	42	50	53.54	48	32.54	24.77	19
PM3-20	1	m3	20	B3	14	50	60	64.24	58	39.84	30.12	23
PM3.5-20		m3.5			20	60	70	74.95	65	44.13	32.47	25
PM4-20		m4			20	64	80	85.66	75	50.78	37.83	27
PM1-25	1	m1	25	B3	6	20	25	26.41	23	15.16	11.21	8
PM1.25-25		m1.25			8	25	31.25	33.02	28	17.88	13.26	9.25
PM1.5-25		m1.5			8	30	37.5	39.62	34	22.25	16.31	11.5
PM2-25		m2			10	40	50	52.83	40	24.33	16.41	10
PM2.5-25		m2.5			14	50	62.5	66.04	50	30.41	20.52	12.5
PM3-25	1	m3	30	B3	15	60	75	79.24	60	37.81	24.62	15
PM1-30		m1			8	24	30	31.41	28	17.71	13.71	10
PM1.5-30		m1.5			10	36	45	47.12	43	28.24	21.56	16
PM2-30		m2			12	45	60	62.83	50	29.43	21.41	12.5
PM2.5-30		m2.5			16	60	75	78.54	62	36.28	26.27	17
PM3-30		m3			20	70	90	94.24	75	45.47	32.12	20


* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (g)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
12	5	9.86	0.22	—	0.022	—	0~0.23	2.77	PM1-20
13	6	13.03	0.42		0.043		0~0.24	5.31	PM1.25-20
19	8	15.37	0.76		0.077		0~0.25	11.0	PM1.5-20
22	10	21.72	1.74		0.18		0~0.26	22.5	PM2-20
29	12	28.06	3.34		0.34		0~0.27	45.9	PM2.5-20
35	15	31.57	5.89	—	0.60	—	0~0.28	79.8	PM3-20
40	18	39.09	9.47		0.97		0~0.30	121	PM3.5-20
45	20	43.43	14.0		1.42		0~0.32	170	PM4-20
14	6	15.03	0.36	—	0.036	—	0~0.23	5.13	PM1-25
16	7	18.7	0.67		0.068		0~0.24	9.27	PM1.25-25
19	9	19.54	1.20		0.12		0~0.25	17.0	PM1.5-25
20	12	26.06	2.84		0.29		0~0.26	32.7	PM2-25
26	15	34.57	5.55		0.57		0~0.27	63.9	PM2.5-25
32	20	37.43	10.0	—	1.02	—	0~0.28	115	PM3-25
16	6	19.03	0.48		0.049		0.13~0.23	8.44	PM1-30
25	10	25.72	1.74		0.18		0.15~0.25	30.9	PM1.5-30
25	12	36.06	3.88		0.40		0.16~0.26	54.5	PM2-30
32	15	47.57	7.57		0.77		0.17~0.27	113	PM2.5-30
40	20	53.43	13.9		1.42		0.18~0.28	196	PM3-30



Specifications	
Precision grade	JIS B 1704: 1978 grade 6
Gear teeth	Gleason
Pressure angle	20°
Material	Duracon (R) (M90-44) *
Heat treatment	—
Tooth hardness	(110 to 120HRR)

* "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back
					A	B		D	E	F	G
DM0.5-20	1	m0.5	20	B1	3	8	10	10.71	11	7.97	6.35
DM0.8-20		m0.8			5	12	16	17.13	16	10.83	8.56
DM1-20		m1			6	16	20	21.41	21	14.62	11.71
DM1.5-20		m1.5			8	20	30	32.12	30	20.59	16.06



When using the injection molded bevel gear as an idler gear and a shaft diameter smaller than the inside diameter of the molded gear, please press fit one of the standard bushings. For details on bushings, please see Page 334.

■ Dimensional tolerance of molded item (unit: mm)

Dimensional classification	Grade	Rough grade
3 or less		±0.20
4 to 6		±0.25
7 to 10		±0.30
11 to 18		±0.35
19 to 30		±0.40
Over 30		±0.50

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Backlash (mm)	Weight (g)	Catalog Number
				Bending strength	Bending strength			
H	I	J	K					
4	7	2.5	4.93	0.082	0.0083	0~0.30	0.57	DM0.5-20
5	10	3.5	10.1	0.31	0.032	0~0.48	1.93	DM0.8-20
7	13	4.5	11.27	0.54	0.055	0~0.60	4.28	DM1-20
10	19	7	18.2	0.96	0.098	0~0.60	11.8	DM1.5-20






BB
Sintered Metal Bushings

Sintered Metal Bushings



When using the injection molded bevel gear as an idler gear and a shaft diameter smaller than the inside diameter of the molded gear, please press fit one of the following standard bushings.



T8



Catalog Number	Inner dia.	Outside dia.	Length	Gear example
	d ^{+0.02 0}	D ^{+0.02 -0.01}	L ^{0 -0.3}	
BB30507	3	5	7	DM0.8
BB30608	3	6	8	DM1
BB40609	4	6	9	DM1
BB50814	5	8	14	DM1.5

Material: Oil-free copper alloy



Bevel Gears


MHP High-Ratio Hypoid Gears	MBSG Ground Spiral Bevel Gears	SBSG Ground Spiral Bevel Gears	MBSA/MBSB Finished Bore Spiral Bevel Gears	SBS Spiral Bevel Gears	SB Bevel Gears	SBY Bevel Gears
Gear Ratio 15~60	Gear Ratio 2	Gear Ratio 1.5~3	Gear Ratio 1.5~3	Gear Ratio 1.5~4	Gear Ratio 1.5~4	Gear Ratio 2~4
Material: SCM415 m1, 1.5 Page 342	Material: SCM415 m2~4 Page 346	Material: S45C m2~4 Page 348	Material: SCM415 m2~6 Page 350	Material: S45C m1~5 Page 354	Material: S45C m1~6 Page 358	Material: S45C m5~8 Page 358
SB Steel Bevel Gears & Pinion Shafts	SUB Stainless Steel Bevel Gears	PB Plastic Bevel Gears	DB Injection Molded Bevel Gears	BB Sintered Metal Bushings	Nissei KSP Ground Spiral Bevel Gears	
Gear Ratio 5	Gear Ratio 1.5~3	Gear Ratio 1.5~3	Gear Ratio 2		Gear Ratio 1~2	
Material: S45C m1.5~3 Page 362	Material: SUS303 m1.5~3 Page 364	Material: MC901 m1~3 Page 366	Material: Duracon (R) (M90-44) m0.5~1 Page 368	Material: Oil-free copper alloy φ5~6 Page 368	Material: SCM415 m1.5~6 Page 370	

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Bevel Gears

MBSG 2-40 20 R

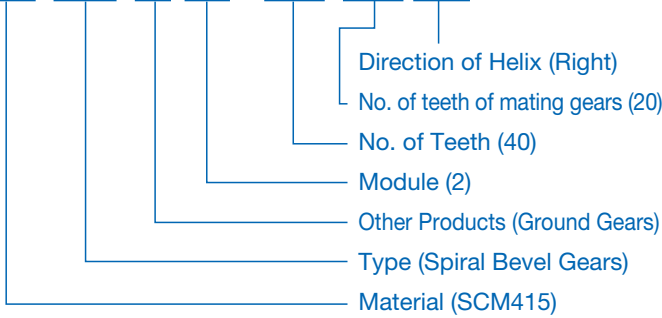

Material		Type	
S	S45C	B	Straight Bevel Gears
M	SCM415	BS	Spiral Bevel Gears
SU	Stainless Steel	HP	High-Ratio Hypoid Gears
P	MC901	Other Information	
D	Polyacetal		
		G	Ground Gears

