





Shaft angle 45°


Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

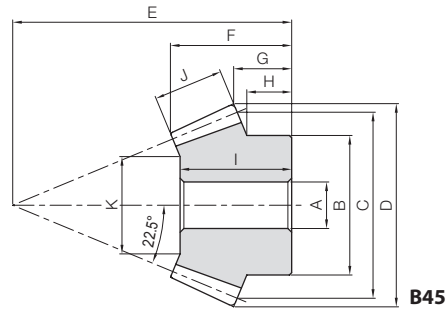

B45

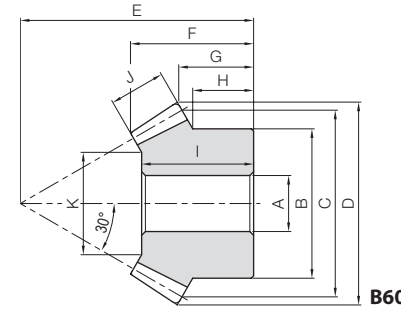

B60

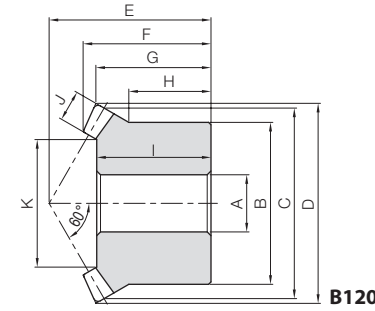

B120

Catalog Number	Gear Ratio	Module	No. of teeth	Shaft angle	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance		Total length	Crown to back	
						A <sub>H7</sub>	B				C	D			E
<b>SAM1.5-20045</b>	1	<b>m1.5</b>	20	45°	B45	8	25	30	32.77	45	19.33	9.36	<b>SAM1.5-20045</b>		
<b>SAM2-20045</b>		<b>m2</b>				10	30				26.08	12.48		<b>SAM2-20045</b>	
<b>SAM2.5-20045</b>		<b>m2.5</b>				12	40				31.92	15.6			<b>SAM2.5-20045</b>
<b>SAM3-20045</b>		<b>m3</b>				14	50				38.66	18.72			
<b>SAM1.5-20060</b>	1	<b>m1.5</b>	20	60°	B60	8	25	30	43.46	50	22.3	14.77	<b>SAM1.5-20060</b>		
<b>SAM2-20060</b>		<b>m2</b>				12	32				26.39	16.36		<b>SAM2-20060</b>	
<b>SAM2.5-20060</b>		<b>m2.5</b>				14	40				30.49	17.94			<b>SAM2.5-20060</b>
<b>SAM3-20060</b>		<b>m3</b>				16	50				34.59	19.54			
<b>SAM1.5-20120</b>	1	<b>m1.5</b>	20	120°	B120	8	26	30	31.5	26	20.69	18.64	<b>SAM1.5-20120</b>		
<b>SAM2-20120</b>		<b>m2</b>				12	34				26.86	24.18		<b>SAM2-20120</b>	
<b>SAM2.5-20120</b>		<b>m2.5</b>				14	42				33.22	29.73			<b>SAM2.5-20120</b>
<b>SAM3-20120</b>		<b>m3</b>				16	50				39.39	35.28			

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
7.75	18	11	17	4.30	0.38	0.44	0.039	0.05~0.15	0.067	<b>SAM1.5-20045</b>
9.65	24	15	20.92	10.3	0.95	1.05	0.097	0.06~0.16	0.15	<b>SAM2-20045</b>
12.58	30	18	30.07	19.6	1.85	2.00	0.19	0.07~0.17	0.31	<b>SAM2.5-20045</b>
15.51	36	22	34	34.4	3.30	3.51	0.34	0.08~0.18	0.55	<b>SAM3-20045</b>
12.58	21	9	18.18	3.54	0.32	0.36	0.033	0.05~0.15	0.077	<b>SAM1.5-20060</b>
13.05	24	12	21.93	8.39	0.78	0.86	0.080	0.06~0.16	0.15	<b>SAM2-20060</b>
13.82	28	15	29.15	16.4	1.56	1.67	0.16	0.07~0.17	0.27	<b>SAM2.5-20060</b>
15.16	32	18	36.36	28.3	2.74	2.89	0.28	0.08~0.18	0.47	<b>SAM3-20060</b>
13.88	18	5	19.22	2.43	0.29	0.25	0.030	0.05~0.15	0.073	<b>SAM1.5-20120</b>
17.26	24	6.5	26.78	5.66	0.70	0.58	0.072	0.06~0.16	0.16	<b>SAM2-20120</b>
20.64	29	8.5	32.03	11.4	1.45	1.16	0.15	0.07~0.17	0.31	<b>SAM2.5-20120</b>
24.02	35	10	39.59	19.4	2.53	1.98	0.26	0.08~0.18	0.53	<b>SAM3-20120</b>

Product Precautions



Page 306




Shaft angle 60°



Shaft angle 120°

## ■ Angular Miter Gear Box Example

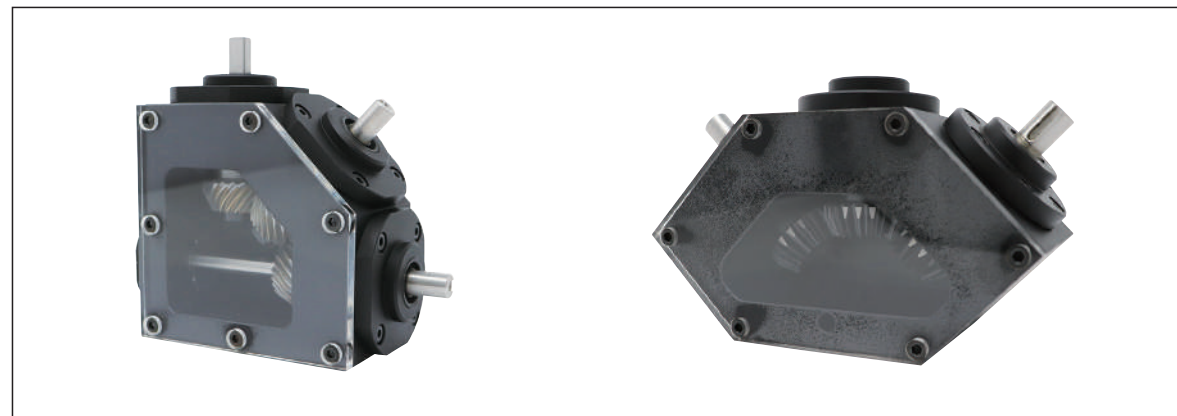

## ■ Angular miter

The axis angle of a normal miter is set to 90°, but the angle is set arbitrarily for the angular miter. The SAM Angular Miters are products with standardized axial angles of 45°, 60° and 120°. Be sure to pair products with the same model number. Custom items of other shaft angles are available, but may not be manufacturable due to the capabilities of the machine.

